

- Signal matching, binary or analog
- Electrical isolation of field signals
- HART compatible and FSK bus capable
- Clearly arranged instrumentation
  - with plug-in modules
- Easy DCS coupling
  - through standardized backplane
- Easy planning and project engineering





**Introduction**

|   |    |
|---|----|
| Explosion protection through intrinsic safety ..... | 4  |
| System description .....                            | 9  |
| General data .....                                  | 13 |

**Binary Modules**

|                         |    |
|-------------------------|----|
| Switch Amplifiers ..... | 15 |
| Solenoid Drivers .....  | 25 |
| Coupling Modules .....  | 35 |

**Analog Modules**

|                        |    |
|------------------------|----|
| Input Isolators .....  | 39 |
| Transmitters .....     | 77 |
| Output Isolators ..... | 85 |

**Monitoring Modules**

|                      |     |
|----------------------|-----|
| Trip Amplifier ..... | 103 |
|----------------------|-----|

**Sockets, Backplanes**

|                            |     |
|----------------------------|-----|
| Sockets, Backplanes .....  | 105 |
| Dimensional drawings ..... | 116 |

**Accessories**

|  |     |
|--|-----|
| Cross Wiring Module .....  | 118 |
| Straight Through Module .....  | 119 |
| FSK Bus Amplifier .....  | 121 |
| System Cables .....  | 123 |
| Power Supply .....   | 124 |
| Device Management Tool SV401 (SMART VISION) (see Data Sheet 10/63-1.20 EN) |     |
| HART PC adapter (see Data Sheet 10/63-6.71 EN)                             |     |

**19" plug-in modules**

|                        |     |
|------------------------|-----|
| Input Isolators .....  | 125 |
| Output Isolators ..... | 133 |

**Mounting and Installation Instructions**

|                           |     |
|---------------------------|-----|
| Safety instructions ..... | 140 |
| Encoding .....            | 141 |

## Explosion protection through intrinsic safety

Potentially explosive substances which may cause a highly explosive atmosphere through even minor spillages are involved in many industrial processes. Such areas with a high explosion hazard are usually called 'hazardous areas'. Adequate precautions must be taken in hazardous areas to sufficiently protect the staff and production equipment, ensuring that the explosive atmosphere will not be ignited.

A variety of explosion protection types have been developed over the years. Special national and international standards like EN 1127-1 or IEC 60079-10 and design standards like DIN EN 60079-14 (VDE 01675, Part 1) or NFPA 70 apply to the individual explosion protection types and define in detail how the respective devices shall be installed and used.

Intrinsic safety is achieved by reducing the electrical energy in current circuits of equipment used in hazardous areas to such an extent that neither sparks or hot surfaces that might result from electrical faults are intensive enough to ignite the explosive atmosphere. The basic principle is quite simple: All flammable substances are classified by the sparking energy required to ignite them. Every intrinsically safe device is designed for a specific gas category and has a certified safety for this gas. The basis for this is provided by ATEX regulations. (ATEX is an abbreviation of the French term "atmosphère explosive" and stands for "explosive atmosphere".) ATEX regulations specify the design of all equipment to be used in hazardous areas, covering electrical and mechanical hazards, gaseous and dust laden atmospheres, process automation and mining applications.

## General definitions regarding explosion protection

|   | <b>European Community</b>  | <b>USA / Canada</b>   |
|---|--|---|
| Intrinsic safety (Ex i)                   | Explosion protection method ensuring that both the electrical energy and the surface temperature are limited to such an extent that the potentially explosive atmosphere in the respective hazardous area will not be ignited.   |   |
| Categories                                | <b>Ex ia:</b> Explosion protection ensured for up to 2 component faults or other faults. Connected intrinsically safe equipment may be installed in hazardous areas, Zones 0, 1 and 2.<br><b>Ex ib:</b> Explosion protection ensured for 1 component fault or other fault. Connected equipment may be installed in hazardous areas, Zones 1 and 2. | Only 1 category:<br>Intrinsic safety is ensured for up to two component faults or other malfunctions. Intrinsically safe equipment can be installed in hazardous areas Div. 1 and 2, and linked equipment may be connected to devices installed in these areas. |
| Risk classification                       | Potentially explosive mixture in<br>Group I: firedamp mines<br>Group II: other areas except mines  | Potentially explosive mixtures of air and<br>CLASS I: gases and vapors<br>CLASS II: dusts<br>CLASS III: fibers  |
| Danger of ignition caused by sparking     | Subdivision in the protection types intrinsic safety/flameproof enclosure and type "u" according to min. ignition current/maximum gap, by assigning the minimum ignition energy of representative gases:<br>Group I: methane<br>Group II A: propane<br>Group II B: ethylene<br>Group II C: hydrogen, acetylene                                     | Subdivision of the Class according to the ignition energy:<br>CLASS I Group A acetylene<br>B hydrogen<br>C ethylene<br>D methane<br>CLASS II Group E metal dust<br>E coal dust<br>E cereal dust<br>CLASS III not further grouped                                |
| Danger of ignition caused by hot surfaces | Grouped in temperature classes to IEC 60079-8 for maximum surface temperatures at an ambient temperature of 40 °C under fault conditions:<br>T1 ≤ 450 °C, T2 ≤ 300 °C, T3 ≤ 200 °C, T4 ≤ 135 °C, T5 ≤ 100 °C, T6 ≤ 85 °C   |   |

**General definitions regarding explosion protection (continued from previous page)**

|   | <b>European Community</b>  | <b>USA / Canada</b>   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
|---|--|---|---------------------|----------------------------------|------------|----------------------|------------|-------------------------------|------------|----------------------|--|---|--|-----------------------|--|---|--|--|
| Hazardous areas                                     | <p>Hazardous areas are classified according to the probability of occurrence of hazardous, potentially explosive atmospheres:</p> <table> <tr> <td>For gases, vapors, mist (EN 1127-1)</td> <td>For gases and dust:</td> </tr> <tr> <td>Zone 0: permanently or long-time</td> <td>Division 1</td> </tr> <tr> <td>Zone 1: occasionally</td> <td>Division 1</td> </tr> <tr> <td>Zone 3: rarely and short-time</td> <td>Division 2</td> </tr> <tr> <td>For dust (EN 1127-1)</td> <td></td> </tr> <tr> <td>Zone 20: permanently, long-time or frequently</td> <td></td> </tr> <tr> <td>Zone 21: occasionally</td> <td></td> </tr> <tr> <td>Zone 22: short-time, or dust layers / accumulations</td> <td></td> </tr> </table> <p>Note (see IEC 60079-10): permanently or long-time means &gt; 1000 h/year, occasionally means 10...1000 h/year, rarely or short-time means &lt; 10 h/year</p> | For gases, vapors, mist (EN 1127-1)   | For gases and dust: | Zone 0: permanently or long-time | Division 1 | Zone 1: occasionally | Division 1 | Zone 3: rarely and short-time | Division 2 | For dust (EN 1127-1) |  | Zone 20: permanently, long-time or frequently |  | Zone 21: occasionally |  | Zone 22: short-time, or dust layers / accumulations |  |  |
| For gases, vapors, mist (EN 1127-1)                 | For gases and dust:  |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 0: permanently or long-time                    | Division 1   |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 1: occasionally                                | Division 1   |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 3: rarely and short-time                       | Division 2   |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| For dust (EN 1127-1)                                |  |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 20: permanently, long-time or frequently       |  |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 21: occasionally                               |  |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Zone 22: short-time, or dust layers / accumulations |  |   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Safety codes  | <p>For the safety codes of flammable gases and vapors which are the basis for the classification according to the ignition energy, temperature and ignition point please refer to the following document:</p> <p>Redeker, Nabert, Schön<br/>„Sicherheitstechnische Kennzahlen brennbarer Gase und Dämpfe“ (Safety codes of flammable gases and vapors)</p>   | NFPA 497 M<br>CSA Nr. C22-1   |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Approval services                                   | <p>PTB Physikalisch-Technische Bundesanstalt</p> <p>DMT Deutsche Montan Technologie</p> <p>BASEEFA British Approvals Service for Electrical Equipment in Flammable Atmosphere</p>  | <p>UL Underwriters Laboratories, USA</p> <p>FM Factory Mutual Research, USA</p> <p>CSA Canadian Standards Association</p> |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |
| Installation standards                              | <p>DIN EN 60079-14 (VDE 0165, Part 1) for areas with a hazard of gas explosions,</p> <p>DIN EN 50281-1-2 (VDE 0165, Part 2) for areas with flammable dust</p>  | <p>NFPA 70 National Electrical Code Art. 500</p> <p>NFPA 493 Standard for intrinsically-safe operations</p>               |                     |                                  |            |                      |            |                               |            |                      |  |   |  |                       |  |   |  |  |

**EC Type Examination Certificate****Physikalisch-Technische Bundesanstalt**

Braunschweig und Berlin



**(1) EC-TYPE-EXAMINATION CERTIFICATE  
(Translation)**

- (2) Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres - Directive 94/9/EC
- (3) EC-type-examination Certificate Number:

**PTB 99 ATEX 2067 X**

- (4) Equipment: Contrans I-switching relay-Ex type V17133-51.
- (5) Manufacturer: Hartmann & Braun GmbH & Co.KG
- (6) Address: D-65760 Eschborn
- (7) This equipment and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The Physikalisch-Technische Bundesanstalt, notified body No. 0102 in accordance with Article 9 of the Council Directive 94/9/EC of 23 March 1994, certifies that this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmospheres, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report PTB Ex 99-29064.

- (9) Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

**EN 50014:1997****EN 50020:1994**

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This EC-type-examination Certificate relates only to the design and construction of the specified equipment in accordance with Directive 94/9/EC. Further requirements of this Directive apply to the manufacture and supply of this equipment.
- (12) The marking of the equipment shall include the following:

**Ex II (1) G [EEx ia] IIC**

Zertifizierungsstelle Explosionsschutz  
By order:

Braunschweig, June 10, 1999

(signature)

Dr.-Ing. U. Johannsmeyer  
Regierungsdirektor

**3 pages, correct and complete as regards content.**

By order:



Dipl.-Ing. Wilkens Braunschweig, August 2, 1999 sheet 1/3

EC-type-examination Certificates without signature and official stamp shall not be valid. The certificates may be circulated only without alteration. Extracts or alterations are subject to approval by the Physikalisch-Technische Bundesanstalt.  
In case of dispute, the German text shall prevail.

Physikalisch-Technische Bundesanstalt • Bundesallee 100 • D-38116 Braunschweig

# Physikalisch-Technische Bundesanstalt

## Braunschweig und Berlin



(13)

## SCHEDULE

(14) EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 2067 X

(15) Description of equipment

The Contrans I-switching relay-Ex type V17133-51. is used for the transmission of switching signals from the non-intrinsically safe control circuit to the relay's switching contacts in the intrinsically safe circuit. The Contrans I-switching relays-Ex type V17133-51. ensure the safe electrical isolation between the intrinsically safe contact circuits and the non-intrinsically safe control circuits. The relays are manufactured in one- or two channel design in an IP 20-enclosure.

The maximum permissible ambient temperature is +60 °C.

#### Electrical data

Control signal circuit 1: ..... 0...30 V DC, approx. 0.53 W  
 (terminals 4(+), 5(-); maximum voltage  
 on the module: pins 3(+), 4(-))  $U_m = 253$  V AC resp. 125 V DC

Control signal circuit 2: ..... 0...30 V DC, ca. 0,53 W  
 (terminals 3(+), 6(-) maximum voltage  
 on the module: pins 5(+), 6(-))  $U_m = 253$  V AC resp. 125 V DC

Switching contact circuits ..... type of protection Intrinsic Safety      EEx ia IIC/IIB resp.  
EEx ib IIC/IIB

only for connection to certified intrinsically safe circuits

The switching contact circuits are passive. The category as well as the explosion group

The category as well as the explosion group of the passive switching contact circuits are determined by

connected certified active intrinsically safe circuit.

The maximum values of the switching contact circuit

on the module: pins 1, 2, 3) shown in the following table.

sheet 2/3

EC-type-examination Certificates without signature and official stamp shall not be valid. The certificates may be circulated only without alteration. Extracts or alterations are subject to approval by the Physikalisch-Technische Bundesanstalt.  
In case of dispute, the German text shall prevail.

In case of dispute, the German text shall prevail.

# Physikalisch-Technische Bundesanstalt



Braunschweig und Berlin

## SCHEDULE TO EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 2067 X

| Maximum permissible contact values<br>per intrinsically safe circuit |           |
|--|-----------|
| $U_i$ [V]  | $I_i$ [A] |
| 55   | 0.8       |
| 40   | 1.5       |
| 37   | 2.0       |

The effective internal inductance and capacitance are negligibly small.

The intrinsically safe switching contact circuits are safely electrically isolated from all other circuits up to a peak value of the nominal voltage of 375 V. The intrinsically safe output circuits are safely electrically isolated from each other up to a peak value of the nominal voltage of 60 V.

(16) Report PTB Ex 99-29064

(17) Special conditions for safe use

The terminals of the Contrans I-switching relay-Ex type V17133-51. shall be installed in such a way that at least a degree of protection of IP 20 according to IEC-publication 60529:1989 is met. This requirement is met when using the terminal socket included.

(18) Essential health and safety requirements

Met by the standards mentioned above.

Zertifizierungsstelle Explosionsschutz  
By order:

Braunschweig, June 10, 1999

(signature)

Dr.-Ing. U. Johannsmeyer  
Regierungsdirektor

sheet 3/3

EC-type-examination Certificates without signature and official stamp shall not be valid. The certificates may be circulated only without alteration. Extracts or alterations are subject to approval by the Physikalisch-Technische Bundesanstalt.  
In case of dispute, the German text shall prevail.


Physikalisch-Technische Bundesanstalt • Bundesallee 100 • D-38116 Braunschweig

## System description




In the field of process automation, the functionality of input or output modules of programmable logic control or distributed control systems is often inadequate for applications. For the ensuing signal matching between the field and control levels, the interface family Contrans I has a comprehensive program involving electrically isolated signal processing components for the supply of power to transmitters, for load increasing, for measuring temperatures, setting alarms, also including further modules for processing binary signals such as switch amplifiers, relays and optocouplers.

Analog modules are suitable for transmitting the HART field communication protocol. A central PC makes it possible to parameterize and centrally configure the underlying field unit level with the aid of special FSK bus amplifiers. All modules are optionally provided with intrinsically safe signal circuits.

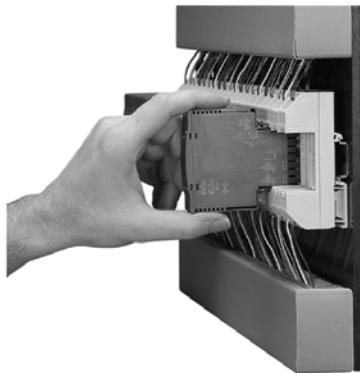

Separation of wiring and function

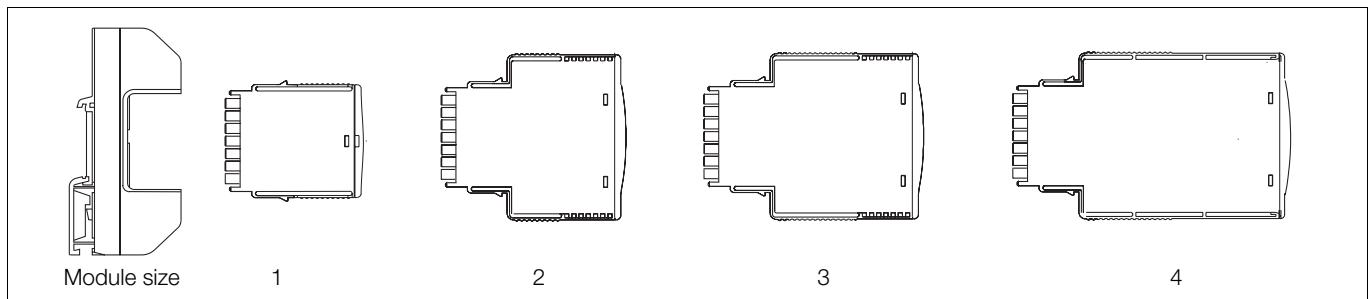

The Contrans I family stands out with its modular design, which permits electronic units to be plugged in a standard sockets or backplanes. Only the DIN rail sockets are required for wiring. This makes it easy to conduct functional matching even during the commissioning phase.

If maintenance becomes necessary, the defective module can be removed and replaced by just plugging the substitute into the standard socket. The replacement is done. There is no necessity to disconnect and reconnect wires. One source of error is thus removed. No expert is required.

In order to reduce the expenditure for planning and wiring, prewired backplanes for 8 or 16 plug-in function modules are provided. Power is fed from a central source. A multi-core system cable with two pluggable ends enables all modules to be connected directly to the input and output modules of the control unit.

The result: reduced expenditure for planning, documentation and wiring; also reduced time for installation, combined with extrem maintenance- and user-friendliness. All of these makes Contrans I a very cost-effective solution.

## Contrans I – socket mounting

### Type of modules for binary signals:

- Switch Amplifier
- Solenoid Driver



### Type of modules for analog signals:

- Input Isolator
  - Loop Powered Supply
  - Isolating Power Supply
  - Input Isolator
  - Input Isolator, programmable
  - Universal Isolator
- Transmitter
  - Temperature Transmitter
  - Intelligent Transmitter
- Output Isolator
  - Loop Powered Isolator
  - Isolating Driver
- Trip Amplifier

The size of the modules depends to the functionality. The size 3 is not used today.


## Contrans I – Backplane mounting



### Type of Backplanes:


#### 8-way

- 8 slots for modules
- 1 slot for the FSK bus amplifier (HART)
- Power supply with separate fusing for the power distribution to the modules and for the signals




#### 16-way

- 16 slots for modules
  - 1 slot for the FSK bus amplifier (HART)
  - Redundant power supply and separate fusing for the power distribution to the modules and for the signals.
- Dry contact for signalling of a fuse fault

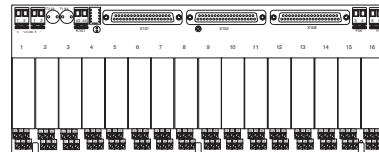

#### 21-way

- 21 slots for modules
  - 2 slots for the FSK bus amplifier (HART)
  - Redundant power supply and separate fusing for the power distribution to the modules and for the signals.
- Dry contact for signalling of a fuse fault
- Especially design for using with 19" racks

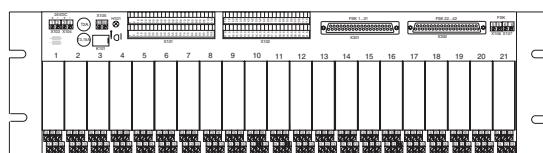


#### Customer-specified solutions

Backplanes can be fit according to customer requirements.

### Module housing


Smallest amount of components to realise an effective production. Labelling by laser beam and well-arranged mapping of the functions.

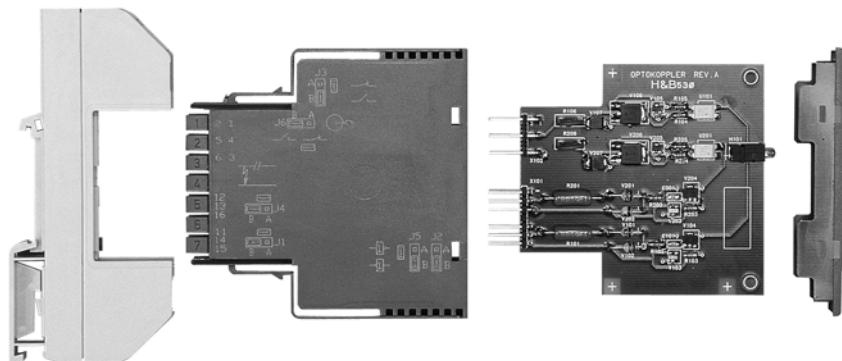

### Module and sockets


Identical pinning of termination

- Power supply: terminals 1, 2
- Channel 1: terminals 4, 5 (control room side); 14, 15 (field side)
- Channel 2: terminals 3, 6 (control room side); 13, 16 (field side)

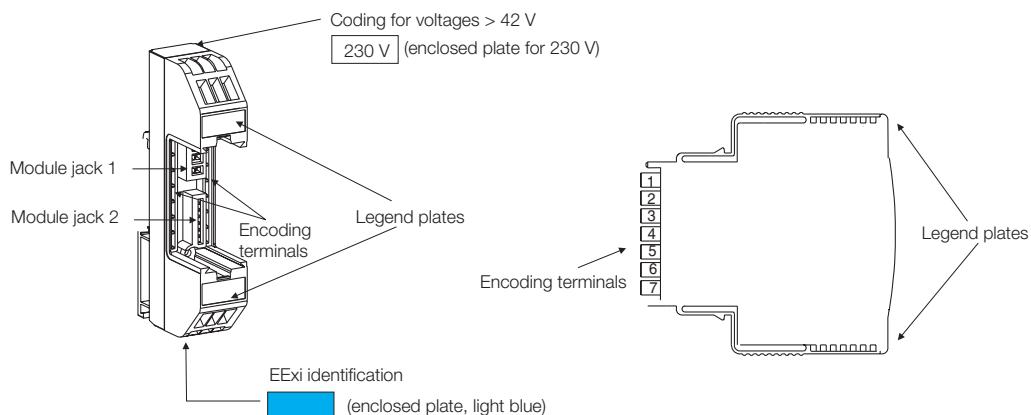

### Encoding


The sockets on slots of the backplanes can be coded to avoid a mixup of modules. Break off the coding pin at the module and code with the encoding star the correspondend coding pins in the socket. Encoding stars are included in the delivery of sockets on backplanes.

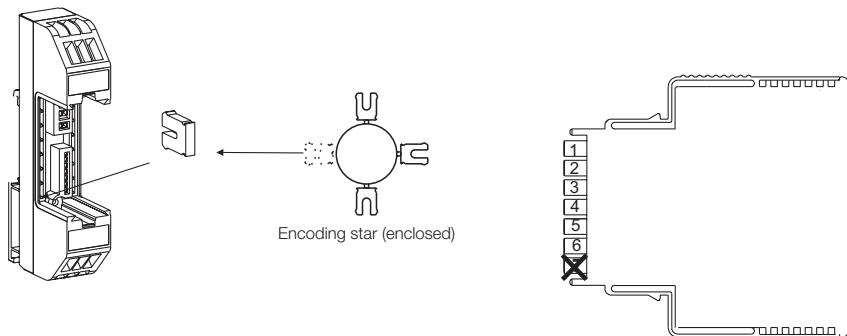

**FSK bus: an system upgrade without additional effort**

Independent HART communication is standard for all Contrans I backplanes. The FSK bus amplifier is only to plug-in and the analog HART FSK bus for one backplane is installed. Only wiring with 2 wires between all the backplanes is necessary to create a HART network. This can be also done as an upgrade in existing installations. The HART

network can be connected through a HART modem to a personal computer. This HART network is independent of the running communication software. Of course the software "SMART VISION" is working with this HART network. This is the easiest way of HART communication and the best tool for service and maintenance in the plant.

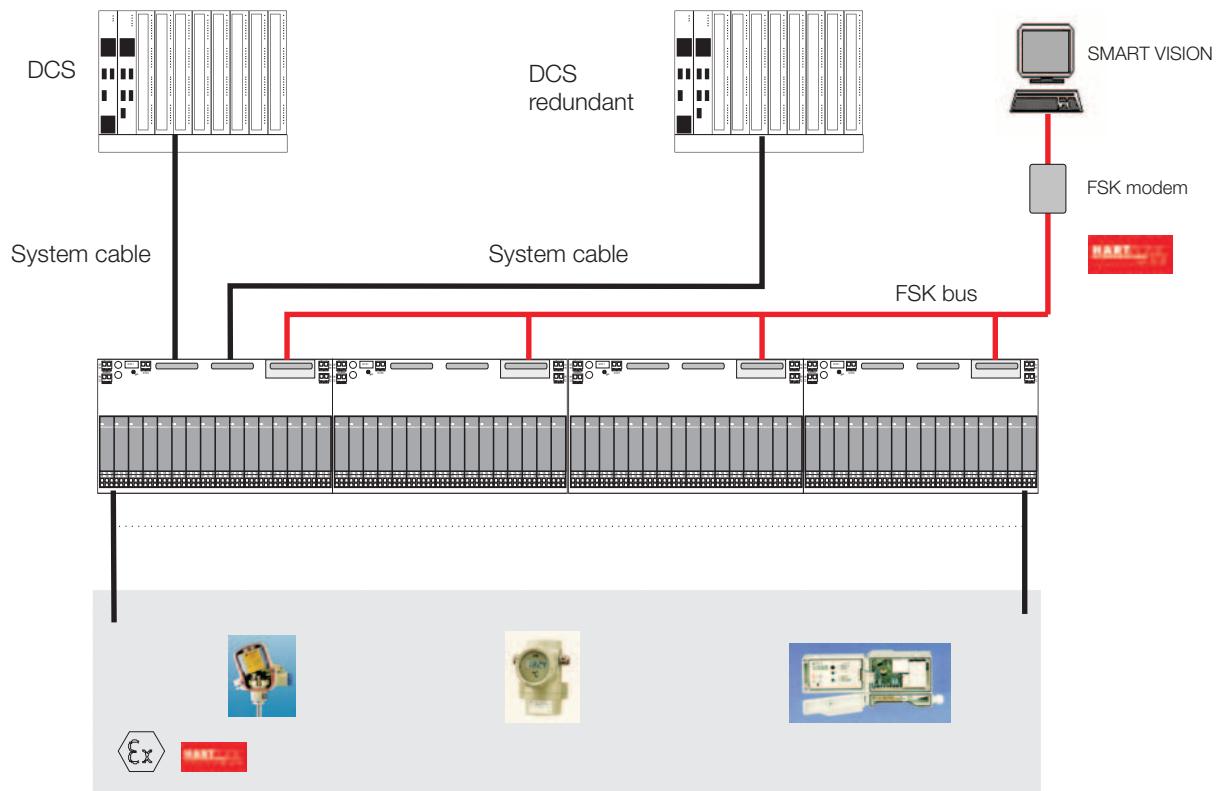

## General data

### Mounting

outside hazardous areas

### Mounting orientation

vertical or horizontal

### Storage temperature

-25...85 °C

### Operating temperature

-20...60 °C; vertical mounting -20...50 °C

For the types V17151-74\_-, -34\_-, -84\_-, -44\_-, V17153-84\_-, -44\_-, at vertical mounting -20...40 °C  
(vertical mounting: top-hat rail vertical)

### Relative humidity

< 85 %, 3K3 to IEC 721, part 3-3, no condensation

### Explosion protection

#### Process inputs or outputs

[EEx ia] IIC or [EEx ia] IIIB or [EEx ib] ...

### Housing

#### Material

Polycarbonate

#### Fire protection class

V2 to UL 94 (DIN IEC 707)

#### Colour

|           |                      |
|-----------|----------------------|
| Module    | RAL 7043, dark grey  |
| Socket,   |                      |
| Backplane | RAL 7035, light grey |

#### Contact material

Phosphorous bronze, gold-plated 0.8 µm

### Mechanical features

#### Transport/shoc

30 g, 18 ms, 2M2 to DIN IEC 721, part 3-2

#### Function/Vibrations

2 g/± 0.15 mm/5...150 Hz/3 x 5 cycles

2 g/10 mm/1...35 Hz/3 x 1 cycle

3M2 to DIN IEC 721, part 3-3

## Functional data

All Contrans I Modules meet the requirements of the EMC guideline 89/336/EWG and the low voltage 73/23/EWG

### Behaviour of analog modules

Features for reference conditions to DIN IEC 770

### Electromagnetic compatibility

DIN EN 61326-1/A1 are met  
NAMUR recommendation NE 21 is met

### Functional modification through jumpers

The respective Data Sheets and block diagrams provides functional informations of the delivered device and matching possibilities of the modules.

The function can only be modified through jumpers off-line. To do this, remove the module from the socket or backplane. After removing the front panel with a screwdriver, the printed circuit board can be pulled out from the housing.

## Safety data

DIN EN 61010-1; DIN VDE 0411, part 1

### Overvoltage category

II

### Degree of pollution

2

### Type of protection to EN 60259/DIN VDE 0470, part 1

IP 20

Max. requirements on power supplies  
(for backplanes with 16 modules and approx. 3.1 W power consumption)

| Power supply | Max. inrush current < 100 µs | Rated current |
|--------------|------------------------------|---------------|
| 19.2 V       | 6.4 A                        | 3.1 A         |
| 24 V         | 8.0 A                        | 2.5 A         |
| 30 V         | 9.9 A                        | 2.0 A         |

## **Binary Modules**

---

### **Switch Amplifier**

|                     |            |                              |            |
|---------------------|------------|------------------------------|------------|
| Switch Amplifier    | 2 channels | 2 x relay outputs .....      | V17131-130 |
| Switch Amplifier    | 2 channels | 2 x transistor outputs ..... | V17131-160 |
| Switch Amplifier Ex | 1 channel  | 1 x relay output .....       | V17131-510 |
| Switch Amplifier Ex | 1 channel  | 2 x relay outputs .....      | V17131-520 |
| Switch Amplifier Ex | 2 channels | 2 x relay outputs .....      | V17131-530 |
| Switch Amplifier Ex | 1 channel  | 1 x transistor output .....  | V17131-540 |
| Switch Amplifier Ex | 1 channel  | 2 x transistor outputs ..... | V17131-550 |
| Switch Amplifier Ex | 2 channels | 2 x transistor outputs ..... | V17131-560 |

## Binary Modules

|   |                             | Switch amplifier              |                               |                               |                               |                               |                               |                               |
|---|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
|   |                             | V17131-130                    | V17131-160                    | V17131-510                    | V17131-520                    | V17131-530                    | V17131-540                    | V17131-550                    |
| <b>Selection table</b>                      |                             |                               |                               |                               |                               |                               |                               |                               |
| <b>Control room</b>                         | <b>Output</b>               |                               |                               |                               |                               |                               |                               |                               |
| Relay                                       |                             | x                             |                               | x x                           | x                             |                               |                               |                               |
| Transistor                                  |                             |                               | x                             |                               |                               |                               | x x                           | x                             |
| Multi channel                               | amount of channels          | 2                             | 2                             |                               |                               | 2                             |                               | 2                             |
| 2. Output                                   |                             |                               |                               | x                             |                               |                               | x                             |                               |
| Reversible signal flow direction            |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| <b>Field</b>                                | <b>Input</b>                |                               |                               |                               |                               |                               |                               |                               |
| Sensor/actor                                | to DIN 19234 NAMUR          | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Proximity detector          | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Switching contact           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| Explosion protection                        | [EEx ia] IIC / [EEx ib] IIC |                               |                               | x/x x/x                       |
| Monitoring                                  | Wire break                  | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Short circuit               | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| <b>General data</b>                         |                             |                               |                               |                               |                               |                               |                               |                               |
| Power supply                                | 19.2...30 V DC              | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | 95...253 V AC               | o <sup>1</sup> o <sup>1</sup> |
| Electrical isolation                        | Input-output                | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Input-power supply          | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Output-power supply         | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
|   | Channel 1 - channel 2       | x x                           |                               |                               | x                             |                               |                               | x                             |
| <b>Modules fits for:</b>                    |                             |                               |                               |                               |                               |                               |                               |                               |
| V17111-100, Socket                          |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| V17111-110, Socket                          |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| V17111-120, Socket with power supply 24/24  |                             |                               |                               |                               |                               |                               |                               |                               |
| V17111-130, Socket with power supply 230/24 |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| V17111-2_ _, Backplane 8 way                |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| V17111-3_ _, Backplane 16 way               |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |
| V17111-6_ _, Backplane 21 way               |                             | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           | x x                           |


x = ok; o<sup>1</sup>= only with V17111-130

# Switch Amplifier

V17131-130

2 channels, 2 x relay outputs

- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

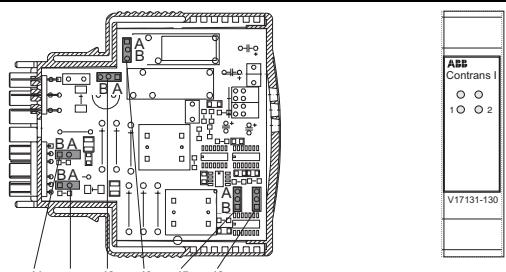

Module size 2

| <b>Output</b> per channel |           | Module fits for: |
|---------------------------|-----------|------------------|
| Socket                    | Backplane |                  |
| V17111-100                | ●         | V17111-2 _ _     |
| V17111-110                | ●         | V17111-3 _ _     |
| V17111-120                | ○         | V17111-6 _ _     |
| V17111-130                | ●         |                  |

| <b>Input</b> per channel                    |                    |  |
|---|--------------------|--|
| Rated voltage                               | to EN 50227, NAMUR |  |
| No load voltage approx.                     | 7.8 V DC           |  |
| Input resistance approx.                    | 980 Ω              |  |
| Short-circuit current approx.               | 7.9 mA             |  |
| Switching span                              | 1.2...2.1 mA       |  |
| Overlap approx.                             | 0.23 mA            |  |
| Input pulse length                          | ≥ 500 μs           |  |
| Input pulse pause                           | ≥ 500 μs           |  |
| Line break monitoring (relay de-energized)  | I < 150 mA         |  |
| Short-circ. monitoring (relay de-energized) | R < 100 Ω          |  |



| <b>General data</b>                             |              |  |
|---|--------------|--|
| LED indicator, power "On" (green)               |              |  |
| LED indicator, "Switching state relay" (yellow) |              |  |
| LED indicator, "Wire break/short-circuit" (red) |              |  |
| Max. ambient temperature                        | -20...+60 °C |  |

| <b>Isolation</b>              |         |  |
|-------------------------------|---------|--|
| Input – output – power supply | 2.3 kV  |  |
| Channel 1 – channel 2         | 1.35 kV |  |
| Weight                        | 90 g    |  |

| <b>Power supply</b> |                |  |
|---------------------|----------------|--|
| Rated voltage       | 19.2...30 V DC |  |
| Power consumption   | 0.94 W         |  |



- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring
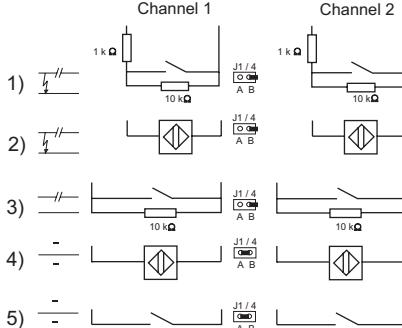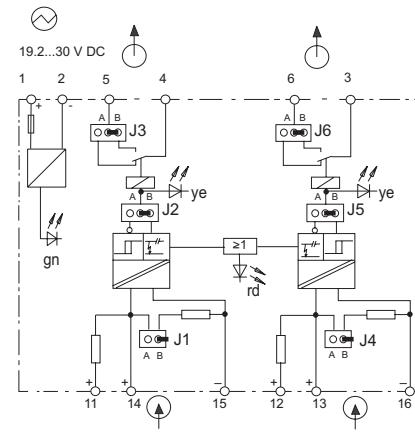
## Functions of the plug-in jumpers J.:

Channel 1: J1, J2, J3  
Channel 2: J4, J5, J6

**J1/J4** Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2/J5** Effective direction  
A = inverse  
B = direct

**J3/J6** Relay output  
A = NC contact  
B = NO contact


The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

# Switch Amplifier

V17131-160

2 channels, 2 x transistor outputs

- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

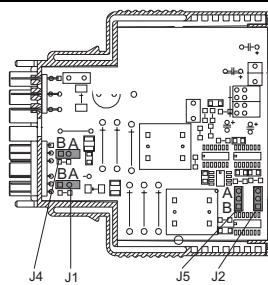

Module size 2

| Output per channel                                   |                    | Module fits for:   |
|--|--------------------|--|
| Input per channel                                    |                    | Socket<br>V17111-100<br>V17111-110<br>V17111-120<br>V17111-130 |
| Rated voltage  | 8...33 V DC        | Backplane<br>V17111-2 _ _<br>V17111-3 _ _<br>V17111-6 _ _      |
| Rated current (limited current)                      | 100 mA             |  |
| Residual current                                     | < 10 µA            |  |
| Max. switching frequency                             | 1 kHz              |  |
| Start delay  | < 500 µs           |  |
| Drop delay   | < 500 µs           |  |
| Voltage drop   | < 2.5 V            |  |
| Rated voltage  | to EN 50227, NAMUR |  |
| No load voltage approx.                              | 7.8 V DC           |  |
| Input resistance approx.                             | 980 Ω              |  |
| Short-circuit current approx.                        | 7.9 mA             |  |
| Switching span                                       | 1.2...2.1 mA       |  |
| Overlap approx.                                      | 0.23 mA            |  |
| Input pulse length                                   | ≥ 500 µs           |  |
| Input pulse pause                                    | ≥ 500 µs           |  |
| Line break monitoring<br>(output high-impedance)     | I < 150 mA         |  |
| Short-circuit monitoring<br>(output high-impedance)  | R < 100 Ω          |  |
| <b>General data</b>                                  |                    |  |
| LED indicator, power "On" (green)                    |                    |  |
| LED indicator, "Switching state transistor" (yellow) |                    |  |
| LED indicator, "Wire break/short-circuit" (red)      |                    |  |
| Max. ambient temperature                             | -20...+60 °C       |  |
| <b>Isolation</b>                                     |                    |  |
| Input – output – power supply                        | 2.3 kV             |  |
| Channel 1 – channel 2                                | 1.35 kV            |  |
| Weight   | 90 g               |  |
| <b>Power supply</b>                                  |                    |  |
| Rated voltage  | 19.2...30 V DC     |  |
| Power consumption                                    | 0.62 W             |  |

Module size 2

Channel 1      Channel 2

- 1)
- 2)
- 3)
- 4)
- 5)

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

## Functions of the plug-in jumpers J.:

Channel 1: J1, J2, J3  
Channel 2: J4, J5, J6

**J1/J4**      Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2/J5**      Effective direction  
A = inverse  
B = direct

**J3/J6**      Transistor output  
A = NC contact  
B = NO contact

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)


# Switch Amplifier Ex

1 channel, 1 x relay output

V17131-510





- Initiator, switching contacts, proximity detectors**
- Electrical isolation between input, output and power supply**
- Wire break and short-circuit monitoring**
- Reversible signal flow direction**

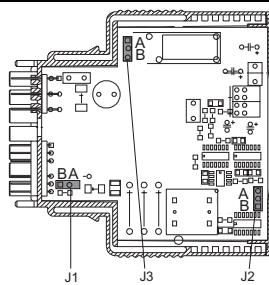

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ●         |

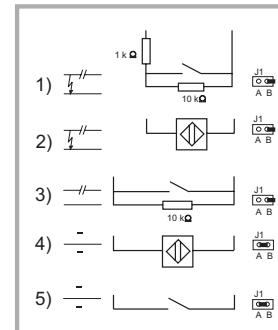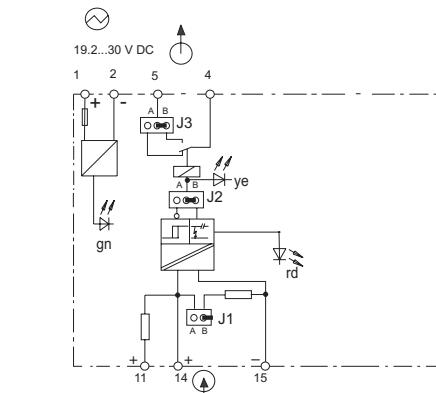

- 1) Contact with wire break and short-circuit monitoring  
 2) NAMUR transmitter with wire break and short-circuit monitoring  
 3) Contact with wire break monitoring  
 4) NAMUR transmitter without wire break and short-circuit monitoring  
 5) Contact without wire break and short-circuit monitoring

## Functions of the plug-in jumpers J.:

**J1** Wire break monitoring  
 A = without, jumper unplugged  
 B = with, jumper parked

**J2** Effective direction  
 A = inverse  
 B = direct

**J3** Relay output  
 A = NC contact  
 B = NO contact

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

| <b>Output</b>  |                             |
|--|-----------------------------|
| Contact load   | 250 V AC, $\cos\phi > 0.7$  |
|  | 30 V DC, 2 A resistive load |
| Mech. life expectancy, operating cycles                | $> 3 \cdot 10^7$            |
| Contact life frequency,<br>operating cycles under load | $> 10^5$                    |
| Max. switching frequency                               | 20 Hz                       |
| Start delay approx.                                    | 20 ms                       |
| Drop delay approx.                                     | 20 ms                       |
| <b>Input</b>   |                             |
| Rated voltage  | to EN 50227, NAMUR          |
| No load voltage approx.                                | 7.8 V DC                    |
| Input resistance approx.                               | 980 $\Omega$                |
| Short-circuit current approx.                          | 7.9 mA                      |
| Switching span   | 1.2...2.1 mA                |
| Overlap approx.  | 0.23 mA                     |
| Input pulse length                                     | $\geq 500 \mu s$            |
| Input pulse pause                                      | $\geq 500 \mu s$            |
| Line break monitoring (relay de-energized)             | $I < 150 \text{ mA}$        |
| Short-circ. monitoring (relay de-energized)            | $R < 100 \Omega$            |
| <b>Explosion protection</b>                            |                             |
| Certificate of conformity                              | [IEEx ia] IIC               |
| Max. short-circuit current                             | $I_o = 18 \text{ mA}$       |
| Max. voltage   | $U_o = 10.6 \text{ V}$      |
| Max. power   | $P_o = 48 \text{ mW}$       |
| Permitted external inductance                          | $L_a = 4 \text{ mH}$        |
| Permitted external capacitance                         | $C_a = 545 \text{ nF}$      |
| <b>General data</b>                                    |                             |
| LED indicator, power "On" (green)                      |                             |
| LED indicator, "Switching state relay" (yellow)        |                             |
| LED indicator, "Wire break/short-circuit" (red)        |                             |
| Max. ambient temperature                               | -20...+60 °C                |
| <b>Isolation</b>                                       |                             |
| Input – output – power supply                          | 2.3 kV                      |
| Weight   | 90 g                        |
| <b>Power supply</b>                                    |                             |
| Rated voltage  | 19.2...30 V DC              |
| Power consumption                                      | 0.51 W                      |



# Switch Amplifier Ex

1 channel, 2 x relay output

V17131-520



- Initiator, switching contacts, proximity detectors**
- Electrical isolation between input, output and power supply**
- Wire break and short-circuit monitoring**
- Reversible signal flow direction**

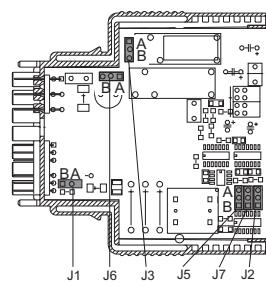

Module size 2

|  |                             |
|--|-----------------------------|
| <b>Output</b> output 1/output 2                        |                             |
| Contact load   | 250 V AC, $\cos\phi > 0.7$  |
|  | 30 V DC, 2 A resistive load |
| Mech. life expectancy, operating cycles                | $> 3 \cdot 10^7$            |
| Contact life frequency,<br>operating cycles under load | $> 10^6$                    |
| Max. switching frequency                               | 20 Hz                       |
| Start delay approx.                                    | 20 ms                       |
| Drop delay approx.                                     | 20 ms                       |
| <b>Input</b> per channel                               |                             |
| Rated voltage  | to EN 50227, NAMUR          |
| No load voltage approx.                                | 7.8 V DC                    |
| Input resistance approx.                               | 980 $\Omega$                |
| Short-circuit current approx.                          | 7.9 mA                      |
| Switching span   | 1.2...2.1 mA                |
| Overlap approx.  | 0.23 mA                     |
| Input pulse length                                     | $\geq 500 \mu s$            |
| Input pulse pause                                      | $\geq 500 \mu s$            |
| Line break monitoring (relay de-energized)             | $I < 150 \text{ mA}$        |
| Short-circ. monitoring (relay de-energized)            | $R < 100 \Omega$            |
| <b>Explosion protection</b>                            |                             |
| Certificate of conformity                              | [IEEx ia] IIC               |
| Max. short-circuit current                             | $I_o = 18 \text{ mA}$       |
| Max. voltage   | $U_o = 10.6 \text{ V}$      |
| Max. power   | $P_o = 48 \text{ mW}$       |
| Permitted external inductance                          | $L_a = 4 \text{ mH}$        |
| Permitted external capacitance                         | $C_a = 545 \text{ nF}$      |
| <b>General data</b>                                    |                             |
| LED indicator, power "On" (green)                      |                             |
| LED indicator, "Switching state relay" (yellow)        |                             |
| LED indicator, "Wire break/short-circuit" (red)        |                             |
| Max. ambient temperature                               | -20...+60 °C                |
| <b>Isolation</b>                                       |                             |
| Input – output – power supply                          | 2.3 kV                      |
| Channel 1 – channel 2                                  | 1.35 kV                     |
| Weight   | 90 g                        |
| <b>Power supply</b>                                    |                             |
| Rated voltage  | 19.2...30 V DC              |
| Power consumption                                      | 0.8 W                       |

Module fits for:

Socket

V17111-100



Backplane

V17111-2 \_ \_



V17111-110



V17111-3 \_ \_





V17111-120



V17111-6 \_ \_



V17111-130

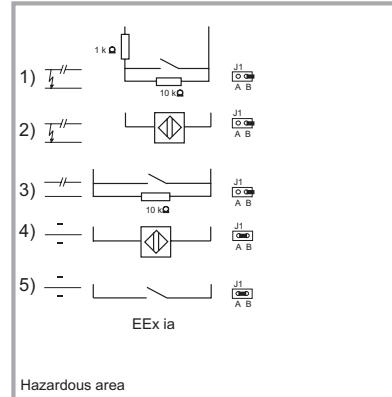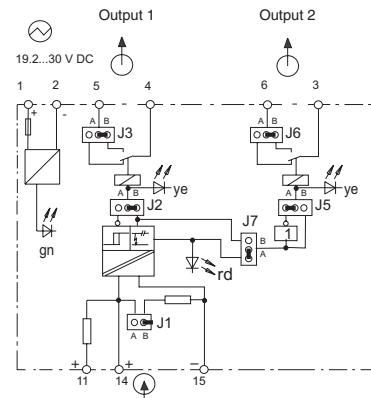

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

#### Functions of the plug-in jumpers J.:

**J1** Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2** Effective direction output 1  
A = inverse  
B = direct

**J5** Effective direction output 2  
A = invers  
B = direct

**J3/J6** Relay output 1/2  
A = NC contact  
B = NO contact

**J7** Output 2  
A = wire break and short-circuit monitoring  
(J5 set on position A)  
B = set (as output 1)  
The positions illustrated on the circuit diagram  
represent standard adjustments (delivery status)


# Switch Amplifier Ex

2 channels, 2 x relay output

V17131-530





- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

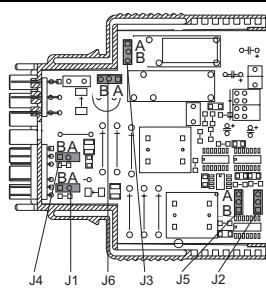

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ●         |

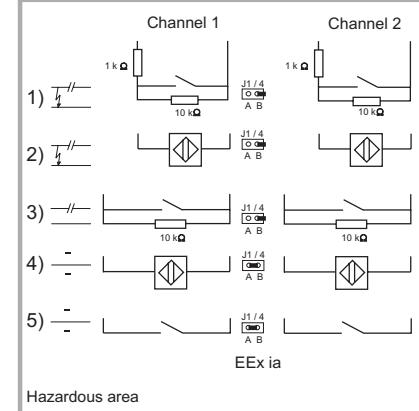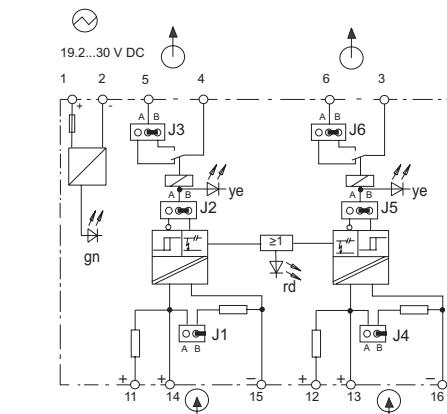

Hazardous area

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

#### Functions of the plug-in jumpers J.:

Channel 1: J1, J2, J3

Channel 2: J4, J5, J6

**J1/J4** Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2/J5** Effective direction  
A = inverse  
B = direct

**J3/J6** Relay output  
A = NC contact  
B = NO contact

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

| <b>Output</b> per channel                              |                             |
|--|-----------------------------|
| Contact load   | 250 V AC, $\cos\phi > 0.7$  |
|  | 30 V DC, 2 A resistive load |
| Mech. life expectancy, operating cycles                | $> 3 \cdot 10^7$            |
| Contact life frequency,<br>operating cycles under load | $> 10^6$                    |
| Max. switching frequency                               | 20 Hz                       |
| Start delay approx.                                    | 20 ms                       |
| Drop delay approx.                                     | 20 ms                       |
| <b>Input</b> per channel                               |                             |
| Rated voltage  | to EN 50227, NAMUR          |
| No load voltage approx.                                | 7.8 V DC                    |
| Input resistance approx.                               | 980 $\Omega$                |
| Short-circuit current approx.                          | 7.9 mA                      |
| Switching span   | 1.2...2.1 mA                |
| Overlap approx.  | 0.23 mA                     |
| Input pulse length                                     | $\geq 500 \mu s$            |
| Input pulse pause                                      | $\geq 500 \mu s$            |
| Line break monitoring (relay de-energized)             | I < 150 mA                  |
| Short-circ. monitoring (relay de-energized)            | R < 100 $\Omega$            |
| <b>Explosion protection</b>                            |                             |
| Certificate of conformity                              | [EEx ia] IIC                |
| Max. short-circuit current                             | I <sub>o</sub> = 18 mA      |
| Max. voltage   | U <sub>o</sub> = 10.6 V     |
| Max. power   | P <sub>o</sub> = 48 mW      |
| Permitted external inductance                          | L <sub>a</sub> = 4 mH       |
| Permitted external capacitance                         | C <sub>a</sub> = 545 nF     |
| <b>General data</b>                                    |                             |
| LED indicator, power "On" (green)                      |                             |
| LED indicator, "Switching state relay" (yellow)        |                             |
| LED indicator, "Wire break/short-circuit" (red)        |                             |
| Max. ambient temperature                               | -20...+60 °C                |
| <b>Isolation</b>                                       |                             |
| Input – output – power supply                          | 2.3 kV                      |
| Channel 1 – channel 2                                  | 1.35 kV                     |
| Weight   | 90 g                        |
| <b>Power supply</b>                                    |                             |
| Rated voltage  | 19.2...30 V DC              |
| Power consumption                                      | 0.94 W                      |


# Switch Amplifier Ex

1 channel, 1 x transistor output

V17131-540





- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

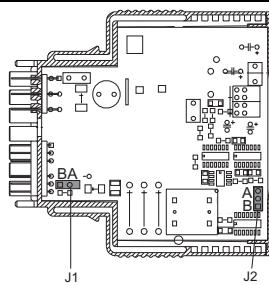

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ●         |

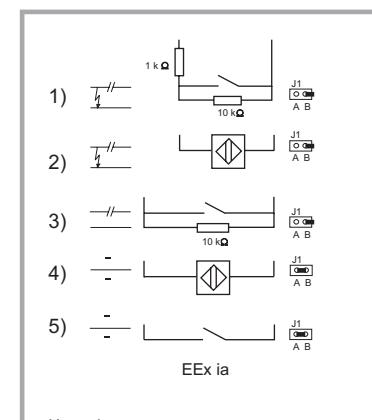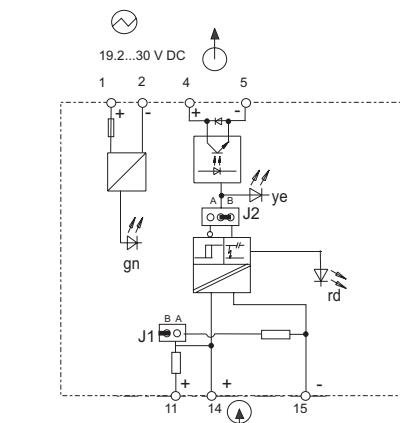

Hazardous area

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

## Functions of the plug-in jumpers J.:

**J1** Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2** Effective direction  
A = inverse  
B = direct

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)


# Switch Amplifier Ex

1 channel, 2 x transistor output

V17131-550





- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

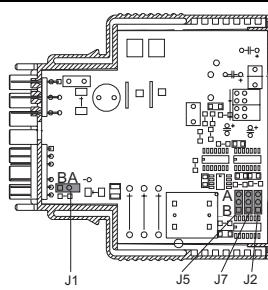

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ●         |

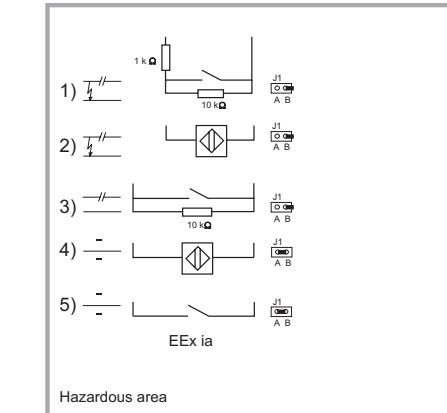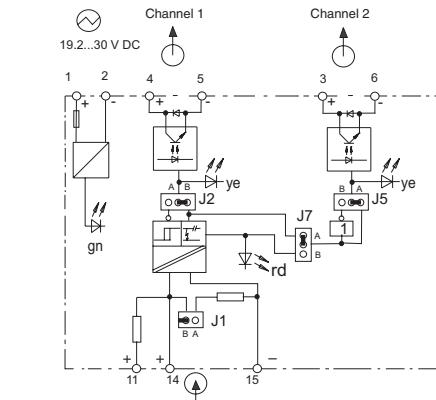

Hazardous area

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

## Functions of the plug-in jumpers J.:

- |           |  |
|-----------|--|
| <b>J1</b> | Wire break monitoring<br>A = without, jumper plugged<br>B = with, jumper parked                            |
| <b>J2</b> | Effective direction output 1<br>A = inverse<br>B = direct  |
| <b>J5</b> | Effective direction output 2<br>A = invers<br>B = direct   |
| <b>J7</b> | Output 2<br>A = wire break and short-circuit monitoring<br>(J5 set on position A)<br>B = set (as output 1) |

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

|  |                         |
|--|-------------------------|
| <b>Output</b> output 1/output 2                      | (safe area)             |
| Rated voltage  | 8...33 V DC             |
| Rated current (limited current)                      | 100 mA                  |
| Residual current                                     | < 10 µA                 |
| Max. switching frequency                             | 1 kHz                   |
| Start delay  | < 500 µs                |
| Drop delay   | < 500 µs                |
| Voltage drop   | < 2.5 V                 |
| <b>Input</b> per channel                             | (hazardous area)        |
| Rated voltage  | to EN 50227, NAMUR      |
| No load voltage approx.                              | 7.8 V DC                |
| Input resistance approx.                             | 980 Ω                   |
| Short-circuit current approx.                        | 7.9 mA                  |
| Switching span                                       | 1.2...2.1 mA            |
| Overlap approx.                                      | 0.23 mA                 |
| Input pulse length                                   | ≥ 500 µs                |
| Input pulse pause                                    | ≥ 500 µs                |
| Line break monitoring<br>(output high-impedance)     | I < 150 mA              |
| Short-circuit monitoring<br>(output high-impedance)  | R < 100 Ω               |
| <b>Explosion protection</b>                          | [EEx ia] IIC            |
| Certificate of conformity                            | PTB 99 ATEX 2119 X      |
| Max. short-circuit current                           | I <sub>o</sub> = 18 mA  |
| Max. voltage   | U <sub>o</sub> = 10.6 V |
| Max. power   | P <sub>o</sub> = 48 mW  |
| Permitted external inductance                        | L <sub>a</sub> = 4 mH   |
| Permitted external capacitance                       | C <sub>a</sub> = 545 nF |
| <b>General data</b>                                  |                         |
| LED indicator, power "On" (green)                    |                         |
| LED indicator, "Switching state transistor" (yellow) |                         |
| LED indicator, "Wire break/short-circuit" (red)      |                         |
| Max. ambient temperature                             | -20...+60 °C            |
| <b>Isolation</b>                                     |                         |
| Input – output – power supply                        | 2.3 kV                  |
| Channel 1 – channel 2                                | 1.35 kV                 |
| Weight   | 90 g                    |
| <b>Power supply</b>                                  | (                       |
| Rated voltage  | 19.2...30 V DC          |
| Power consumption                                    | 0.48 W                  |


# Switch Amplifier Ex

2 channels, 2 x transistor output

V17131-560





- Initiator, switching contacts, proximity detectors
- Electrical isolation between input, output and power supply
- Wire break and short-circuit monitoring
- Reversible signal flow direction

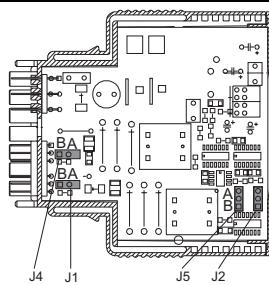

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ●         |

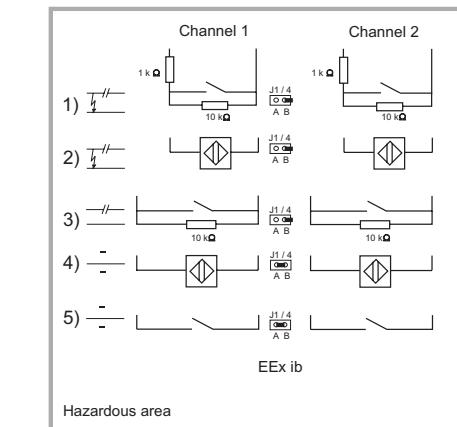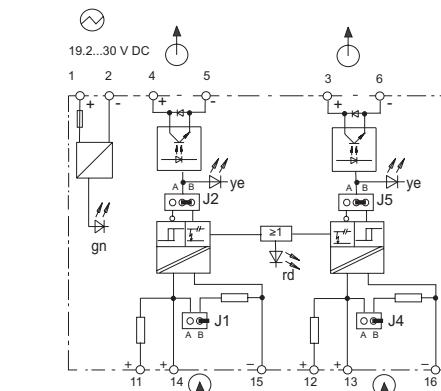

- 1) Contact with wire break and short-circuit monitoring
- 2) NAMUR transmitter with wire break and short-circuit monitoring
- 3) Contact with wire break monitoring
- 4) NAMUR transmitter without wire break and short-circuit monitoring
- 5) Contact without wire break and short-circuit monitoring

## Functions of the plug-in jumpers J.:

Channel 1: J1, J2  
Channel 2: J4, J5

**J1/J4** Wire break monitoring  
A = without, jumper plugged  
B = with, jumper parked

**J2/J5** Effective direction  
A = inverse  
B = direct

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

| Output per channel                                   | (safe area)             |
|--|-------------------------|
| Rated voltage  | 8...33 V DC             |
| Rated current (limited current)                      | 100 mA                  |
| Residual current                                     | < 10 µA                 |
| Max. switching frequency                             | 1 kHz                   |
| Start delay  | < 500 µs                |
| Drop delay   | < 500 µs                |
| Voltage drop   | < 2.5 V                 |
| Input per channel                                    | (hazardous area)        |
| Rated voltage  | to EN 50227, NAMUR      |
| No load voltage approx.                              | 7.8 V DC                |
| Input resistance approx.                             | 980 Ω                   |
| Short-circuit current approx.                        | 7.9 mA                  |
| Switching span                                       | 1.2...2.1 mA            |
| Overlap approx.                                      | 0.23 mA                 |
| Input pulse length                                   | ≥ 500 µs                |
| Input pulse pause                                    | ≥ 500 µs                |
| Line break monitoring<br>(output high-impedance)     | I < 150 mA              |
| Short-circuit monitoring<br>(output high-impedance)  | R < 100 Ω               |
| Explosion protection                                 | [IEx ia] IIC            |
| Certificate of conformity                            | PTB 99 ATEX 2119 X      |
| Max. short-circuit current                           | I <sub>o</sub> = 18 mA  |
| Max. voltage   | U <sub>o</sub> = 10.6 V |
| Max. power   | P <sub>o</sub> = 48 mW  |
| Permitted external inductance                        | L <sub>a</sub> = 4 mH   |
| Permitted external capacitance                       | C <sub>a</sub> = 545 nF |
| General data   |                         |
| LED indicator, power "On" (green)                    |                         |
| LED indicator, "Switching state transistor" (yellow) |                         |
| LED indicator, "Wire break/short-circuit" (red)      |                         |
| Max. ambient temperature                             | -20...+60 °C            |
| Isolation  |                         |
| Input – output – power supply                        | 2.3 kV                  |
| Channel 1 – channel 2                                | 1.35 kV                 |
| Weight   | 90 g                    |
| Power supply   | ⊕                       |
| Rated voltage  | 19.2...30 V DC          |
| Power consumption                                    | 0.62 W                  |

## Binary Modules

---

### Solenoid Drivers

|                     |               |            |
|---------------------|---------------|------------|
| Solenoid Drivers Ex | 8/20 .....    | V17132-510 |
| Solenoid Drivers Ex | 13/45 .....   | V17132-520 |
| Solenoid Drivers Ex | 15/47 .....   | V17132-530 |
| Solenoid Drivers Ex | 17.5/36 ..... | V17132-540 |
| Solenoid Drivers Ex | 19/32 .....   | V17132-550 |
| Solenoid Drivers Ex | 21/25 .....   | V17132-560 |
| Solenoid Drivers Ex | 23/30 .....   | V17132-570 |


## Binary Modules

| Selection table                             |   | Solenoid driver |                |                |                |                |                |                |
|---|---|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|   |   | V17132-510      | V17132-520     | V17132-530     | V17132-540     | V17132-550     | V17132-560     | V17132-570     |
| Control room                                | <b>Input</b>  |                 |                |                |                |                |                |                |
|   | Logig/direct  | x               | x              | x              | x              | x              | x              | x              |
|   | Contact   | x               | x              | x              | x              | x              | x              | x              |
| Field                                       | <b>Output</b>   |                 |                |                |                |                |                |                |
|   | Sensor/actor  | x               | x              | x              | x              | x              | x              | x              |
|   | Audible alarms / LED annunciations                              | x               | x              | x              | x              | x              | x              | x              |
|   | Explosion protection [EEx ia] IIB / [EEx ia] IIC / [EEx ib] IIC | x/-/x           | x/-/x          | x/-/x          | x/-/x          | x/-/x          | x/-/x          | x/-/x          |
|   | Short circuit monitoring  | x               | x              | x              | x              | x              | x              | x              |
|   | Rated voltage [V]   | 8               | 13             | 15             | 17,5           | 19             | 21             | 23             |
|   | Rated current [mA]  | 20              | 45             | 47             | 36             | 32             | 25             | 30             |
| General data                                | Power supply  | x               | x              | x              | x              | x              | x              | x              |
|   | 20...253 V AC/DC  | o <sup>1</sup>  | o <sup>1</sup> | o <sup>1</sup> | o <sup>1</sup> | o <sup>1</sup> | o <sup>1</sup> | o <sup>1</sup> |
|   | Electrical galvanic isolation                                   | x               | x              | x              | x              | x              | x              | x              |
|   | Input - power supply  | o <sup>2</sup>  | o <sup>2</sup> | o <sup>2</sup> | o <sup>2</sup> | o <sup>2</sup> | o <sup>2</sup> | o <sup>2</sup> |
|   | <b>Modules fits for:</b>  |                 |                |                |                |                |                |                |
|   | V17111-100, Socket  | x               | x              | x              | x              | x              | x              | x              |
|   | V17111-110, Socket  | x               | x              | x              | x              | x              | x              | x              |
|   | V17111-120, Socket with power supply 24/24                      | x               | x              | x              | x              | x              | x              | x              |
| V17111-130, Socket with power supply 230/24 |   |                 |                |                |                |                |                |                |
| V17111-2 __, Backplane 8 way                |   |                 |                |                |                |                |                |                |
| V17111-3 __, Backplane 16 way               |   |                 |                |                |                |                |                |                |
| V17111-6 __, Backplane 21 way               |   |                 |                |                |                |                |                |                |

x = ok; - = nicht ok; o<sup>1</sup> = only with V17111-130; o<sup>2</sup> = only with V17111-120, -130




- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

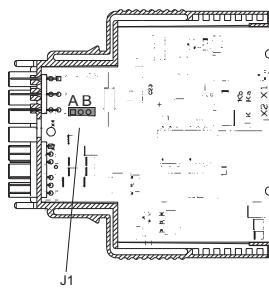

Module size 2

| <b>Input</b>                                |                         | (safe area)      | Module fits for:  |
|---|-------------------------|------------------|---|
| <b>Logic</b> (terminals 4/5, jumper J1 = A) |                         |                  | Socket<br>V17111-100 ● Backplane<br>V17111-110 ● V17111-2 _ _<br>V17111-120 ● V17111-3 _ _<br>V17111-130 ● V17111-6 _ _ |
| Signal level L (output "Off")               | 0...3 V                 |                  |   |
| Signal level H (output "On")                | 12...30 V               |                  |   |
| <b>Direct</b> (terminal 4/5, jumper J1 = B) |                         |                  |   |
| Signal level (output "Off")                 | < 3 V                   |                  |   |
| Signal level (output "On")                  | 19.2...30 V             |                  |   |
| <b>Contact</b> (terminal 3/4)               |                         |                  |   |
| Signal level floating                       |                         |                  |   |
| <b>Short-circuit signal</b> (terminal 5/6)  |                         |                  |   |
| Voltage H (open collector)                  | 12...30 V               |                  |   |
| <b>Output</b>                               |                         | (hazardous area) |   |
| Rated voltage                               | 8 V                     |                  |   |
| Rated current                               | 20 mA                   |                  |   |
| Switching frequency (logic)                 | < 200 Hz                |                  |   |
| Switching frequency (direct)                | < 10 Hz                 |                  |   |
| Residual ripple                             | < 200 mV                |                  |   |
| <b>Explosion protection</b>                 | [EEx ib] IIC            |                  |   |
| Certificate of conformity                   | PTB 99 ATEX 2118 X      |                  |   |
| Max. short-circuit current                  | $I_o = 32.2 \text{ mA}$ |                  |   |
| Max. voltage                                | $U_o = 10.5 \text{ V}$  |                  |   |
| Max. power                                  | $P_o = 340 \text{ mW}$  |                  |   |
| Permitted external inductance               | $L_a = 4 \text{ mH}$    |                  |   |
| Permitted external capacitance              | $C_a = 400 \text{ nF}$  |                  |   |
| <b>General data</b>                         |                         |                  |   |
| LED indicators, power "On" (green)          |                         |                  |   |
| LED indicators, "Switching state" (yellow)  |                         |                  |   |
| LED indicators, "Short-circuit" (red)       |                         |                  |   |
| <b>Isolation</b>                            |                         |                  |   |
| Input – output                              | 2.3 kV                  |                  |   |
| Max. ambient temperature                    | -20...+60 °C            |                  |   |
| Weight                                      | 90 g                    |                  |   |
| <b>Power supply</b>                         |                         |                  |   |
| Rated voltage                               | 19.2...30 V DC          |                  |   |
| Power consumption                           | 0.6 W                   |                  |   |

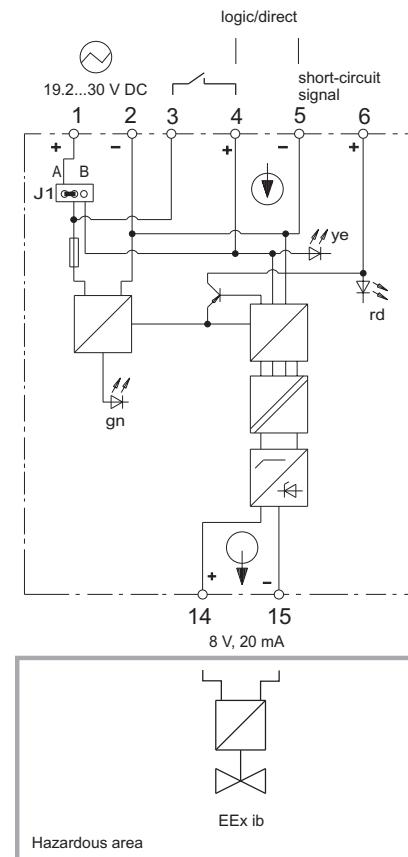

Hazardous area


**Functions of the plug-in jumpers J.:**

**J1** Input circuit  
A = contact/logic  
B = direct  
(without additional power supply)

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)



- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

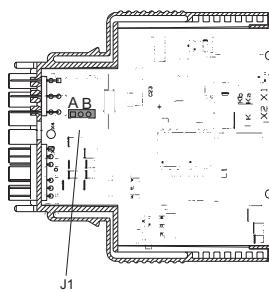

Module size 2

Module fits for:

Socket

V17111-100

V17111-110

V17111-120

V17111-130

Backplane

V17111-2 \_ \_


V17111-3 \_ \_

V17111-6 \_ \_







- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

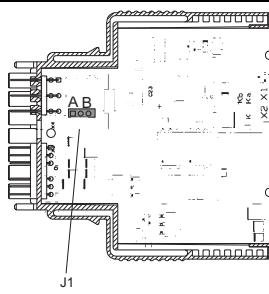

Module size 2

| <b>Input</b>                                |                         | (safe area)      | Module fits for: |                      |
|---|-------------------------|------------------|------------------|----------------------|
| <b>Logic</b> (terminals 4/5, jumper J1 = A) |                         |                  | Socket           | Backplane            |
| Signal level L (output "Off")               | 0...3 V                 |                  | V17111-100       | V17111-2 _ _         |
| Signal level H (output "On")                | 12...30 V               |                  | V17111-110       | V17111-3 _ _         |
| <b>Direct</b> (terminal 4/5, jumper J1 = B) |                         |                  | V17111-120       | V17111-6 _ _         |
| Signal level (output "Off")                 | < 3 V                   |                  | V17111-130       |                      |
| Signal level (output "On")                  | 19.2...30 V             |                  |                  |                      |
| <b>Contact</b> (terminal 3/4)               |                         |                  |                  |                      |
| Signal level floating                       |                         |                  |                  |                      |
| <b>Short-circuit signal</b> (terminal 5/6)  |                         |                  |                  |                      |
| Voltage H (open collector)                  | 12...30 V               |                  |                  |                      |
| <b>Output</b>                               |                         | (hazardous area) | logic/direct     |                      |
| Rated voltage                               | 15 V                    |                  | 19.2...30 V DC   | short-circuit signal |
| Rated current                               | 47 mA                   |                  | 1 2 3 4          |                      |
| Switching frequency (logic)                 | < 200 Hz                |                  | 5 6              |                      |
| Switching frequency (direct)                | < 10 Hz                 |                  | ye               |                      |
| Residual ripple                             | < 200 mV                |                  | rd               |                      |
| <b>Explosion protection</b>                 | [EEx ib] IIC            |                  | 14 15            | 15 V, 47 mA          |
| Certificate of conformity                   | PTB 99 ATEX 2118 X      |                  |                  |                      |
| Max. short-circuit current                  | $I_o = 59.4 \text{ mA}$ |                  |                  |                      |
| Max. voltage                                | $U_o = 17.5 \text{ V}$  |                  |                  |                      |
| Max. power                                  | $P_o = 1040 \text{ mW}$ |                  |                  |                      |
| Permitted external inductance               | $L_a = 0.9 \text{ mH}$  |                  |                  |                      |
| Permitted external capacitance              | $C_a = 120 \text{ nF}$  |                  |                  |                      |
| <b>General data</b>                         |                         |                  |                  |                      |
| LED indicators, power "On" (green)          |                         |                  |                  |                      |
| LED indicators, "Switching state" (yellow)  |                         |                  |                  |                      |
| LED indicators, "Short-circuit" (red)       |                         |                  |                  |                      |
| <b>Isolation</b>                            |                         |                  |                  |                      |
| Input – output                              | 2.3 kV                  |                  |                  |                      |
| Max. ambient temperature                    | -20...+60 °C            |                  |                  |                      |
| Weight                                      | 90 g                    |                  |                  |                      |
| <b>Power supply</b>                         |                         |                  |                  |                      |
| Rated voltage                               | 19.2...30 V DC          |                  |                  |                      |
| Power consumption                           | 1.5 W                   |                  |                  |                      |

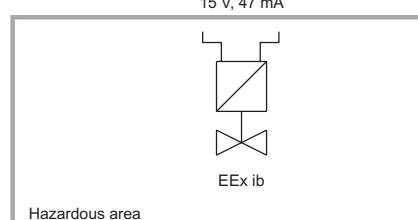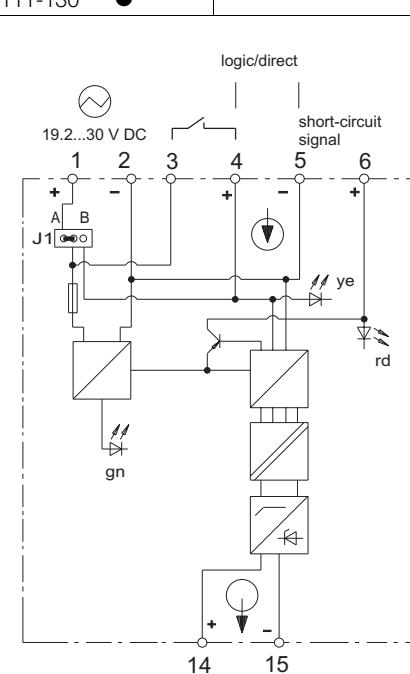**Functions of the plug-in jumpers J.:**

J1      Input circuit  
 A = contact/logic  
 B = direct  
 (without additional power supply)

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)


# Solenoid Driver Ex

17.5 V/36 mA

V17132-540



- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

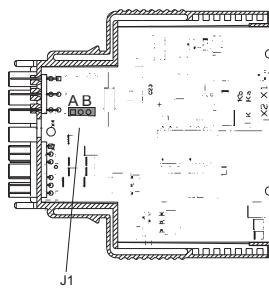

Module size 2

Module fits for:

Socket

V17111-100  
V17111-110  
V17111-120  
V17111-130

Backplane


V17111-2 \_ \_  
V17111-3 \_ \_  
V17111-6 \_ \_



V17111-130




- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

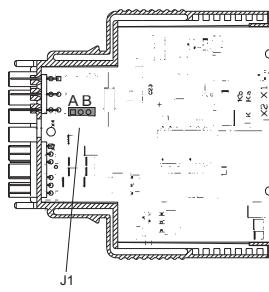

Module size 2

| <b>Input</b>                                |                        | (safe area)      | Module fits for: |              |
|---|------------------------|------------------|------------------|--------------|
| <b>Logic</b> (terminals 4/5, jumper J1 = A) |                        |                  | Socket           | Backplane    |
| Signal level L (output "Off")               | 0...3 V                |                  | V17111-100       | V17111-2 _ _ |
| Signal level H (output "On")                | 12...30 V              |                  | V17111-110       | V17111-3 _ _ |
| <b>Direct</b> (terminal 4/5, jumper J1 = B) |                        |                  | V17111-120       | V17111-6 _ _ |
| Signal level (output "Off")                 | < 3 V                  |                  | V17111-130       |              |
| Signal level (output "On")                  | 19.2...30 V            |                  |                  |              |
| <b>Contact</b> (terminal 3/4)               |                        |                  |                  |              |
| Signal level floating                       |                        |                  |                  |              |
| <b>Short-circuit signal</b> (terminal 5/6)  |                        |                  |                  |              |
| Voltage H (open collector)                  | 12...30 V              |                  |                  |              |
| <b>Output</b>                               |                        | (hazardous area) | logic/direct     |              |
| Rated voltage                               | 19 V                   |                  | 19.2...30 V DC   |              |
| Rated current                               | 32 mA                  |                  |                  |              |
| Switching frequency (logic)                 | < 200 Hz               |                  |                  |              |
| Switching frequency (direct)                | < 10 Hz                |                  |                  |              |
| Residual ripple                             | < 200 mV               |                  |                  |              |
| <b>Explosion protection</b>                 | [EEx ib] IIC           |                  |                  |              |
| Certificate of conformity                   | PTB 99 ATEX 2118 X     |                  |                  |              |
| Max. short-circuit current                  | $I_o = 41 \text{ mA}$  |                  |                  |              |
| Max. voltage                                | $U_o = 21 \text{ V}$   |                  |                  |              |
| Max. power                                  | $P_o = 860 \text{ mW}$ |                  |                  |              |
| Permitted external inductance               | $L_a = 0.8 \text{ mH}$ |                  |                  |              |
| Permitted external capacitance              | $C_a = 76 \text{ nF}$  |                  |                  |              |
| <b>General data</b>                         |                        |                  |                  |              |
| LED indicators, power "On" (green)          |                        |                  |                  |              |
| LED indicators, "Switching state" (yellow)  |                        |                  |                  |              |
| LED indicators, "Short-circuit" (red)       |                        |                  |                  |              |
| <b>Isolation</b>                            |                        |                  |                  |              |
| Input – output                              | 2.3 kV                 |                  |                  |              |
| Max. ambient temperature                    | -20...+60 °C           |                  |                  |              |
| Weight                                      | 90 g                   |                  |                  |              |
| <b>Power supply</b>                         |                        |                  |                  |              |
| Rated voltage                               | 19.2...30 V DC         |                  |                  |              |
| Power consumption                           | 1.5 W                  |                  |                  |              |

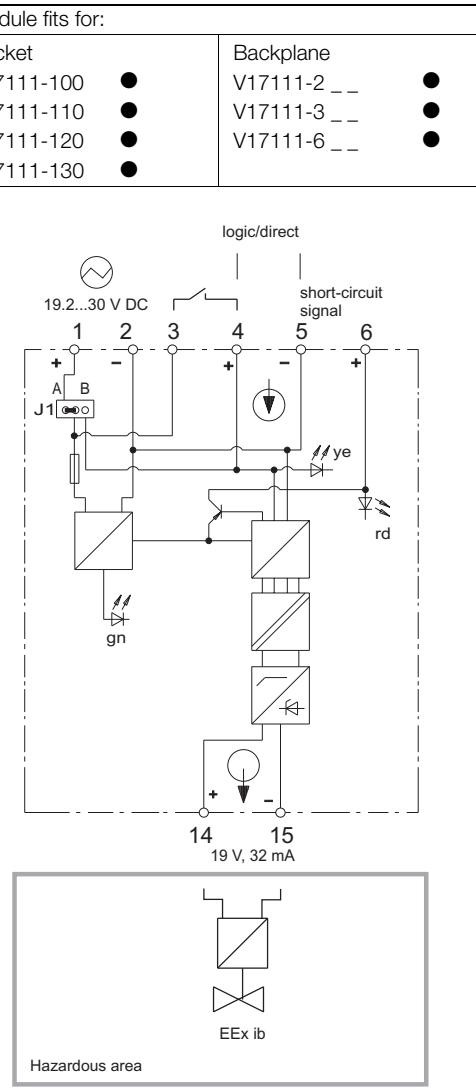**Functions of the plug-in jumpers J.:**

J1      Input circuit  
 A = contact/logic  
 B = direct  
 (without additional power supply)

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)


# Solenoid Driver Ex

21 V/25 mA

V17132-560




- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Short-circuit monitoring
- Electrical isolation input/output

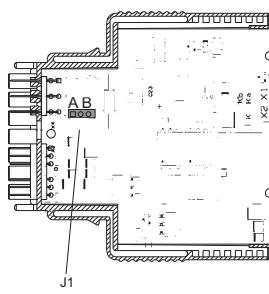

Module size 2

| Input                                       |                         | (safe area)      | Module fits for: |              |
|---|-------------------------|------------------|------------------|--------------|
| <b>Logic</b> (terminals 4/5, jumper J1 = A) |                         |                  | Socket           | Backplane    |
| Signal level L (output "Off")               | 0...3 V                 |                  | V17111-100       | V17111-2 _ _ |
| Signal level H (output "On")                | 12...30 V               |                  | V17111-110       | V17111-3 _ _ |
| <b>Direct</b> (terminal 4/5, jumper J1 = B) |                         |                  | V17111-120       | V17111-6 _ _ |
| Signal level (output "Off")                 | < 3 V                   |                  | V17111-130       |              |
| Signal level (output "On")                  | 19.2...30 V             |                  |                  |              |
| <b>Contact</b> (terminal 3/4)               |                         |                  |                  |              |
| Signal level floating                       |                         |                  |                  |              |
| <b>Short-circuit signal</b> (terminal 5/6)  |                         |                  |                  |              |
| Voltage H (open collector)                  | 12...30 V               |                  |                  |              |
| Output                                      |                         | (hazardous area) | logic/direct     |              |
| Rated voltage                               | 21 V                    |                  | 19.2...30 V DC   |              |
| Rated current                               | 25 mA                   |                  |                  |              |
| Switching frequency (logic)                 | < 200 Hz                |                  |                  |              |
| Switching frequency (direct)                | < 10 Hz                 |                  |                  |              |
| Residual ripple                             | < 200 mV                |                  |                  |              |
| <b>Explosion protection</b>                 | [EEx ib] IIC            |                  |                  |              |
| Certificate of conformity                   | PTB 99 ATEX 2118 X      |                  |                  |              |
| Max. short-circuit current                  | $I_o = 32.2 \text{ mA}$ |                  |                  |              |
| Max. voltage                                | $U_o = 24.2 \text{ V}$  |                  |                  |              |
| Max. power                                  | $P_o = 780 \text{ mW}$  |                  |                  |              |
| Permitted external inductance               | $L_a = 0.5 \text{ mH}$  |                  |                  |              |
| Permitted external capacitance              | $C_a = 47 \text{ nF}$   |                  |                  |              |
| General data                                |                         |                  |                  |              |
| LED indicators, power "On" (green)          |                         |                  |                  |              |
| LED indicators, "Switching state" (yellow)  |                         |                  |                  |              |
| LED indicators, "Short-circuit" (red)       |                         |                  |                  |              |
| Isolation                                   |                         |                  |                  |              |
| Input – output                              | 2.3 kV                  |                  |                  |              |
| Max. ambient temperature                    | -20...+60 °C            |                  |                  |              |
| Weight                                      | 90 g                    |                  |                  |              |
| Power supply                                |                         |                  |                  |              |
| Rated voltage                               | 19.2...30 V DC          |                  |                  |              |
| Power consumption                           | 1.5 W                   |                  |                  |              |

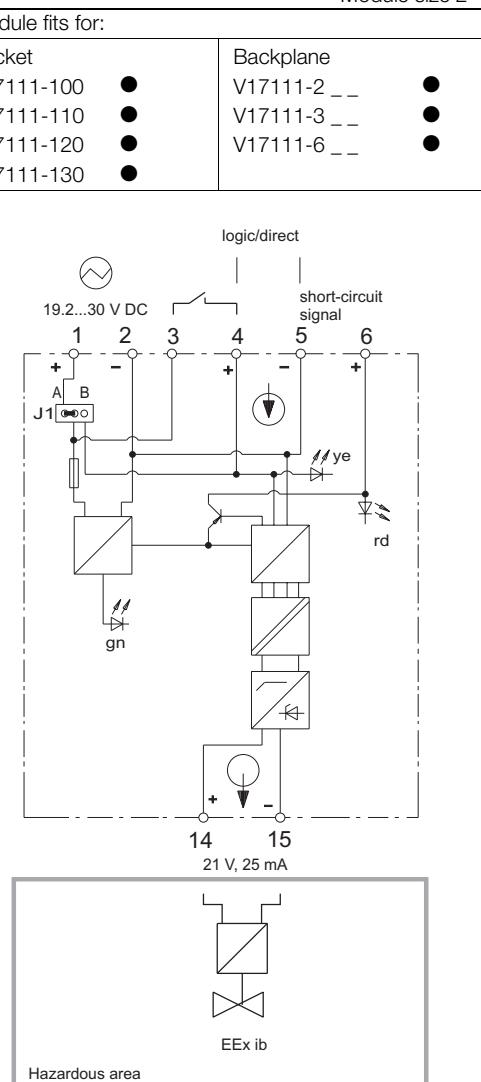


## Functions of the plug-in jumpers J.:

J1      Input circuit  
 A = contact/logic  
 B = direct  
 (without additional power supply)

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)



- Actuation of intrinsically safe solenoid valves, alarm sounders, LED indicators
- Logic input
- With or without additional power supply
- Electrical isolation input/output

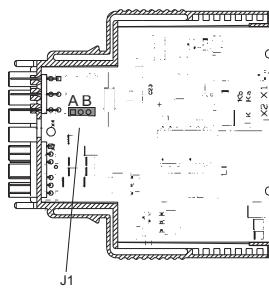

Module size 4



Module fits for:

Socket

V17111-100 ●  
V17111-110 ●  
V17111-120 ●  
V17111-130 ●

Backplane

V17111-2 \_ \_ \_  
V17111-3 \_ \_ \_  
V17111-6 \_ \_ \_

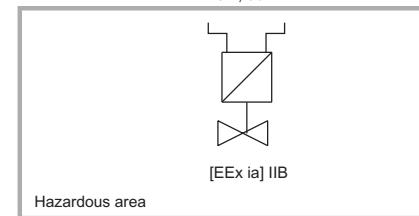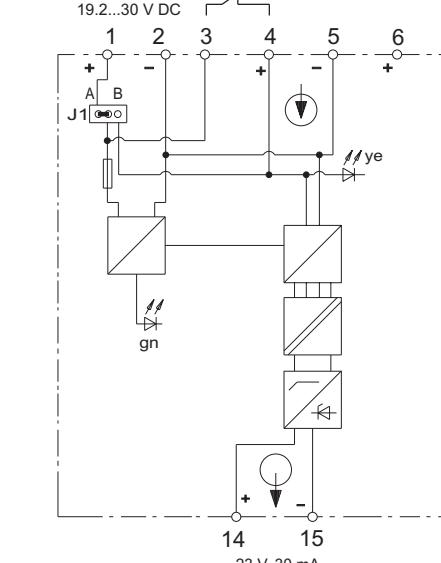**Functions of the plug-in jumpers J.:**

**J1**      Input circuit  
 A = contact/logic  
 B = direct  
 (without additional power supply)

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

| <b>Input</b>                               |                            |
|--|----------------------------|
| Logic (terminals 4/5, jumper J1 = A)       | ↓ (safe area)              |
| Signal level L (output "Off")              | 0...3 V                    |
| Signal level H (output "On")               | 12...30 V                  |
| Direct (terminal 4/5, jumper J1 = B)       |                            |
| Signal level (output "Off")                | < 3 V                      |
| Signal level (output "On")                 | 19.2...30 V                |
| Contact (terminal 3/4)                     |                            |
| Signal level floating                      |                            |
| <b>Output</b>                              |                            |
| Rated voltage                              | 23 V DC                    |
| Rated current                              | 30 mA, short-circuit proof |
| Switching frequency (logic)                | < 250 Hz                   |
| Switching frequency (direct)               | < 8 Hz                     |
| Residual ripple                            | < 200 mV                   |
| <b>Explosion protection</b>                | [EEx ia] IIB               |
| Certificate of conformity                  | TÜV 00 ATEX 1553           |
| Max. short-circuit current                 | $I_o = 109.3 \text{ mA}$   |
| Max. voltage                               | $U_o = 27.6 \text{ V}$     |
| Max. power                                 | $P_o = 1.11 \text{ W}$     |
| Permitted external inductance              | $L_a = 2 \text{ mH}$       |
| Permitted external capacitance             | $C_a = 202 \text{ nF}$     |
| <b>General data</b>                        |                            |
| LED indicators, power "On" (green)         |                            |
| LED indicators, "Switching state" (yellow) |                            |
| <b>Test voltages</b>                       |                            |
| Input – output                             | 2.3 kV                     |
| Max. ambient temperature                   | -20...+60 °C               |
| Weight                                     | 120 g                      |
| <b>Power supply</b>                        | ∅                          |
| Rated voltage                              | 19.2...30 V DC             |
| Power consumption                          | 1.1 W                      |

## **Binary Modules**



---

### **Coupling Modules**

|                 |                  |            |
|-----------------|------------------|------------|
| Optocoupler     | 2 channels ..... | V17133-110 |
| Switch Relay    | 2 channels ..... | V17133-210 |
| Switch Relay Ex | 2 channels ..... | V17133-510 |

2 channels

- Electrical isolation of control signals
- Matching to various of voltage levels
- Input with protection against wrong polarity

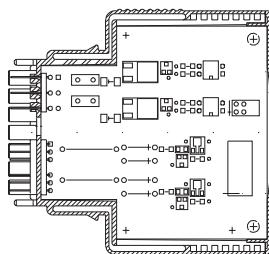

Module size 2

## Module fits for:

## Socket

V17111-100

V17111-110

V17111-120

V17111-130

## Backplane

V17111-2 \_ \_

V17111-3 \_ \_



V17111-6 \_ \_



# Switch Relay

2 channels

V17133-210
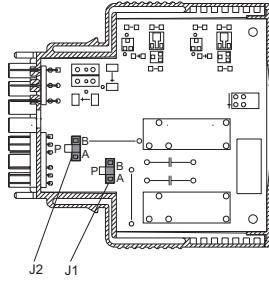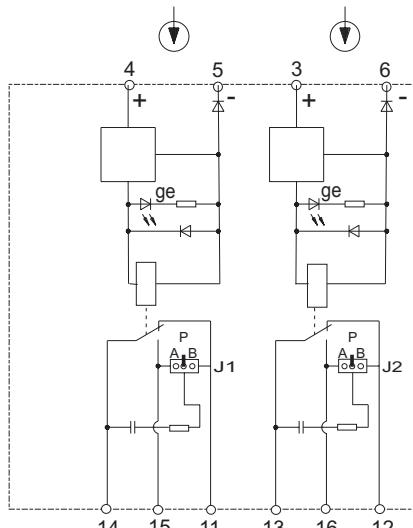
| <ul style="list-style-type: none"> <li><b>Electrical isolation of control signals</b></li> <li><b>Matching to various of voltage levels</b></li> <li><b>Level conversion</b></li> <li><b>With or without contact protection circuit</b></li> </ul> | <br><b>Module size 2</b>  |        |           |              |              |              |              |              |              |              |  |
|--|---|--------|-----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--|
| <b>Input</b>    | <b>Module fits for:</b> <table border="1"> <thead> <tr> <th>Socket</th> <th>Backplane</th> </tr> </thead> <tbody> <tr> <td>V17111-100 ●</td> <td>V17111-2 _ _</td> </tr> <tr> <td>V17111-110 ●</td> <td>V17111-3 _ _</td> </tr> <tr> <td>V17111-120 ○</td> <td>V17111-6 _ _</td> </tr> <tr> <td>V17111-130 ○</td> <td></td> </tr> </tbody> </table> | Socket | Backplane | V17111-100 ● | V17111-2 _ _ | V17111-110 ● | V17111-3 _ _ | V17111-120 ○ | V17111-6 _ _ | V17111-130 ○ |  |
| Socket   | Backplane   |        |           |              |              |              |              |              |              |              |  |
| V17111-100 ●   | V17111-2 _ _  |        |           |              |              |              |              |              |              |              |  |
| V17111-110 ●   | V17111-3 _ _  |        |           |              |              |              |              |              |              |              |  |
| V17111-120 ○   | V17111-6 _ _  |        |           |              |              |              |              |              |              |              |  |
| V17111-130 ○   |   |        |           |              |              |              |              |              |              |              |  |
| <b>Output</b>   | <br><b>Channel 1</b> <b>Channel 2</b>  |        |           |              |              |              |              |              |              |              |  |
| (Mixed equipment on output 250 V AC/30 V DC is not allowed).   | <b>Functions of the plug-in jumpers J.:</b> <p><b>J1/J2</b> Spark quenching units<br/> A = with, NO contact channel 1/2<br/> B = with, NC contact channel 1/2<br/> B = without (park position)</p> <p>The positions illustrated on the circuit diagram represent standard adjustments (delivery status)</p>   |        |           |              |              |              |              |              |              |              |  |



# Switch Relay Ex

2 channels

V17133-510



- Electrical isolation of control signals
- Matching to various of voltage levels
- Level conversion

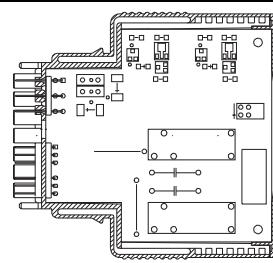

Module size 2

| <b>Input</b>   |   | Module fits for:  |                           |
|--|---|---|---------------------------|
| Signal level H   | 15...30 V DC  | Socket<br>V17111-100 ●  | Backplane<br>V17111-2 _ _ |
| Signal level L   | -30...+3 V DC   | Socket<br>V17111-110 ●  | Backplane<br>V17111-3 _ _ |
| Input current  | < 24 mA   | Socket<br>V17111-120 ○  | Backplane<br>V17111-6 _ _ |
| Protected against wrong polarity up to ± 80 V          |   | Socket<br>V17111-130 ○  | Backplane<br>V17111-6 _ _ |
| <b>Output</b>  |   | Detailed connection diagram showing two optoisolators (ye) connected between channels 1 and 2. Terminals 4, 5, 3, and 6 are labeled with '+' and '-' symbols. Terminals 14, 15, 11, 13, 16, and 12 are at ground level. |                           |
| Contact load AC/cosφ                                   | 250 V, 1 A/> 0.7  |   |                           |
| Contact load DC/resistive load                         | 30 V, 2 A   |   |                           |
| Mech. life expectancy, operating cycles                | > 3 · 10 <sup>7</sup>   |   |                           |
| Contact life frequency,<br>operating cycles under load | > 10 <sup>6</sup>   |   |                           |
| Spark quenching unit                                   | 100 Ω/22 nF   |   |                           |
| Switching frequency                                    | < 20 Hz   |   |                           |
| Start delay  | < 10 ms   |   |                           |
| Drop delay   | < 10 ms   |   |                           |
| Contact material                                       | AgCdO   |   |                           |
| Explosion protection                                   | [EEx ia] IIC  |   |                           |
| Certificate of conformity                              | PTB 99 ATEX 2067 X  |   |                           |
| Max. voltage   | U <sub>i</sub> = 55 V U <sub>i</sub> = 40 V U <sub>i</sub> = 37 V   |   |                           |
| Max. current   | I <sub>i</sub> = 800 mA I <sub>i</sub> = 1.5 A I <sub>i</sub> = 2 A |   |                           |
| <b>General data</b>                                    |   |   |                           |
| LED indicator, switching state "relay" (yellow)        |   |   |                           |
| <b>Isolation</b> per channel                           |   |   |                           |
| Coil – contact   | 2.3 kV  |   |                           |
| <b>Isolation</b> channel 1 – channel 2                 |   |   |                           |
| Contact 1 – contact 2                                  | 2.3 kV  |   |                           |
| Coil 1 – coil 2  | 820 V   |   |                           |
| Max. ambient temperature                               | -20...+60 °C  |   |                           |
| Weight   | 90 g  |   |                           |

### Input Isolators

|                              |                                     |            |
|------------------------------|-------------------------------------|------------|
| Loop Powered Supply          | 1 channel . . . . .                 | V17151-110 |
| Loop Powered Supply          | 2 channels . . . . .                | V17151-130 |
| Power Supply Module          | 2 channels, HART, FSK bus . . . . . | V17151-140 |
| Isolating Power Supply       | 1 channel . . . . .                 | V17151-21_ |
| Isolating Power Supply       | 1 channel, HART . . . . .           | V17151-22_ |
| Isolating Power Supply       | 1 channel, HART, FSK bus . . . . .  | V17151-320 |
| Isolating Power Supply       | 1 channel, HART . . . . .           | V17151-325 |
| Isolating Power Supply       | 2 channels, HART, FSK bus . . . . . | V17151-340 |
| Isolating Power Supply       | 2 outputs, HART, FSK bus . . . . .  | V17151-350 |
| Loop Powered Input Isolator  | 2 channels . . . . .                | V17151-413 |
| Input Isolator               | 1 channel, HART, FSK bus . . . . .  | V17151-420 |
| Input Isolator, programmable | 1 channel, V, mA . . . . .          | V17151-43_ |
| Input Isolator               | 2 channels, HART, FSK bus . . . . . | V17151-440 |
| Input Isolator, universal    | 1 channel, V, mA . . . . .          | V17151-480 |
| Loop Powered Supply Ex       | 1 channel . . . . .                 | V17151-510 |
| Loop Powered Supply Ex       | 1 channel, HART . . . . .           | V17151-520 |
| Isolating Power Supply Ex    | 1 channel . . . . .                 | V17151-61_ |
| Isolating Power Supply Ex    | 1 channel, HART . . . . .           | V17151-62_ |
| Isolating Power Supply Ex    | 1 channel, HART, FSK bus . . . . .  | V17151-720 |
| Isolating Power Supply Ex    | 1 channel, HART . . . . .           | V17151-725 |
| Isolating Power Supply Ex    | 2 channels, HART, FSK bus . . . . . | V17151-740 |
| Isolating Power Supply Ex    | 2 channels, HART . . . . .          | V17151-745 |
| Isolating Power Supply Ex    | 2 outputs, HART, FSK bus . . . . .  | V17151-750 |
| Isolating Power Supply Ex    | 2 outputs, HART . . . . .           | V17151-755 |
| Input Isolator Ex            | 1 channel, HART, FSK bus . . . . .  | V17151-820 |
| Input Isolator Ex            | 1 channel, HART . . . . .           | V17151-825 |
| Input Isolator Ex            | 2 channels, HART, FSK bus . . . . . | V17151-840 |
| Input Isolator Ex            | 2 channels, HART . . . . .          | V17151-845 |





## Analog Modules

x=ok; - =not ok; o1= only with V171111-130; o2= only with V171111-120, -130

# Loop Powered Supply

V17151-110


1 channel
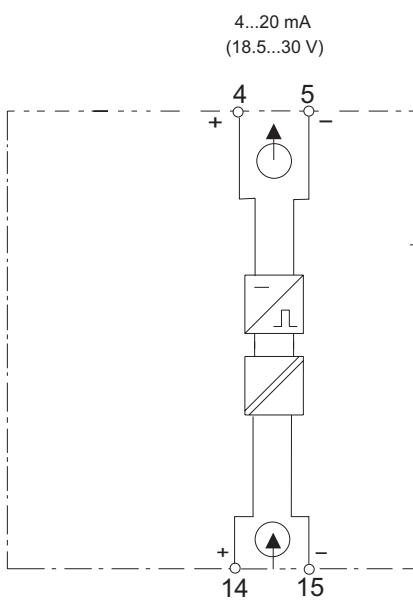
|  |  |  |           |              |              |              |              |              |              |              |  |  |
|--|--|--|-----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--|--|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for current signal with transmitter power supply</b></li> </ul>   | <br><b>Module size 1</b>   |                                     |           |              |              |              |              |              |              |              |  |  |
| <b>Output</b><br>   | <b>Module fits for:</b><br><table border="1"> <tr> <td>Socket</td> <td>Backplane</td> </tr> <tr> <td>V17111-100 ●</td> <td>V17111-2 _ _</td> </tr> <tr> <td>V17111-110 ●</td> <td>V17111-3 _ _</td> </tr> <tr> <td>V17111-120 ○</td> <td>V17111-6 _ _</td> </tr> <tr> <td>V17111-130 ○</td> <td></td> </tr> </table> | Socket   | Backplane | V17111-100 ● | V17111-2 _ _ | V17111-110 ● | V17111-3 _ _ | V17111-120 ○ | V17111-6 _ _ | V17111-130 ○ |  |  |
| Socket   | Backplane  |  |           |              |              |              |              |              |              |              |  |  |
| V17111-100 ●   | V17111-2 _ _   |  |           |              |              |              |              |              |              |              |  |  |
| V17111-110 ●   | V17111-3 _ _   |  |           |              |              |              |              |              |              |              |  |  |
| V17111-120 ○   | V17111-6 _ _   |  |           |              |              |              |              |              |              |              |  |  |
| V17111-130 ○   |  |  |           |              |              |              |              |              |              |              |  |  |
| Output current (short-circuit proof) 4...20 mA<br>Transformation ratio 1:1<br>Detect. of wire break (input) < 400 µA<br>Supply voltage 18.5...30 V   |  |  |           |              |              |              |              |              |              |              |  |  |
| <b>Input</b><br>  |  |  |           |              |              |              |              |              |              |              |  |  |
| Input current (short-circuit proof) 4...20 mA<br>Supply voltage ≥ 12.8...24.3 V<br>Short-circuit current 24...35 mA  |  |  |           |              |              |              |              |              |              |              |  |  |
| <b>General data</b><br>Voltage drop at 20 mA < 5.7 V   |  |  |           |              |              |              |              |              |              |              |  |  |
| <b>Isolation</b><br>Input – output 1.35 kV<br>Max. ambient temperature -20...+60 °C<br>Weight 40 g   |  |  |           |              |              |              |              |              |              |              |  |  |
| <b>Performance under reference conditions</b><br>Linearity deviation < 0.1 %<br>Error limit < 0.3 %<br>Temperature effect < 0.1 %/10 K<br>Impedance effect < 0.18 %<br>Response time < 50 ms |  |  |           |              |              |              |              |              |              |              |  |  |
|  | <br>4...20 mA<br>(18.5...30 V)  |  |           |              |              |              |              |              |              |              |  |  |
|  |  | <br>4...20 mA<br>(>12.8...24.3 V) |           |              |              |              |              |              |              |              |  |  |

# Loop Powered Supply

V17151-130

2 channels

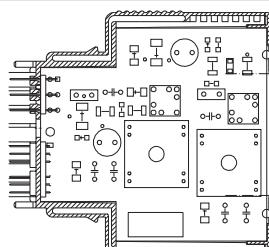
|  |  |
|--|--|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for current signal with transmitter power supply</b></li> </ul> | <br><b>Module size 2</b> |
| <b>Output</b> per channel  | <br>Module fits for:      |
| Output current (short-circuit proof)   | 4...20 mA  |
| Transformation ratio   | 1:1  |
| Detect. of wire break (input)  | < 400 µA   |
| Supply voltage   | 18.5...30 V  |
| <b>Input</b> per channel   | <br>Socket                |
| Input current (short-circuit proof)  | 4...20 mA  |
| Supply voltage   | ≥ 12.8...24.3 V  |
| Short-circuit current  | 24...35 mA   |
| <b>General data</b>  | Backplane  |
| Voltage drop at 20 mA  | < 5.7 V  |
| <b>Isolation</b>   | V17111-100 ●   |
| Input – output   | 1.35 kV  |
| Channel 1 – channel 2  | 500 V  |
| Max. ambient temperature   | -20...+60 °C   |
| Weight   | 90 g   |
| <b>Performance under reference conditions</b>  | V17111-110 ●   |
| Linearity deviation  | < 0.1 %  |
| Error limit  | < 0.3 %  |
| Temperature effect   | < 0.1 %/10 K   |
| Impedance effect   | < 0.18 %   |
| Response time  | < 50 ms  |
|   | V17111-120 ○   |
|   | V17111-130 ○   |
|   | V17111-2 _ _ ●   |
|   | V17111-3 _ _ ●   |
|   | V17111-6 _ _ ●   |
|   |  |
|    | 4...20 mA<br>(18.5...30 V)   |
|    | 4...20 mA<br>(18.5...30 V)   |
|   | 4...20 mA<br>> 12.8...23.3 V   |
|   | 4...20 mA<br>> 12.8...23.3 V   |
|   | Channel 1  |
|   | Channel 2  |
|   | 4...20 mA<br>P, dP, T, ...   |
|   | 4...20 mA<br>P, dP, T, ...   |

# Power Supply Module

V17151-140

2 channels, HART, FSK bus

- Power supply for loop powered transmitters
- 2 channels with FSK connection

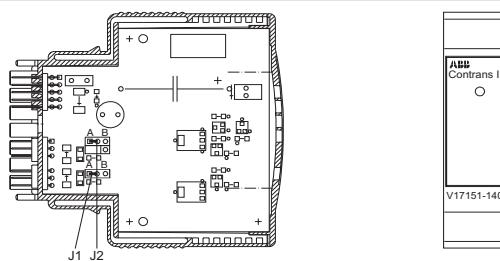


Modulgröße 2

| Output                                 |   | Module fits for: |
|--|---|------------------|
|  |   | Socket           |
| Output current (short-circuit proof)   | 4...20 mA                               | V17111-100 ●     |
| Transformation ratio                   | 1:1                                     | V17111-110 ○     |
| Input                                  |   | V17111-120 ○     |
| Input current                          | 4...20 mA                               | V17111-130 ○     |
| Short-circuit current                  | 24...35 mA                              |                  |
| Overranging                            | > 23.6 mA, max. 40 mA                   |                  |
| General data                           |   |                  |
| Voltage drop per channel               | approx. 1.5 V (J1/J2 = A) <sup>1)</sup> |                  |
| Rated voltage - supply voltage         | approx. 6.3 V (J1/J2 = B) <sup>1)</sup> |                  |
|  | approx. 2.3 V (J1/J2 = A) <sup>2)</sup> |                  |
|  | approx. 7.1 V (J1/J2 = B) <sup>2)</sup> |                  |
| Max. ambient temperature               | -20...+60 °C                            |                  |
| Weight                                 | 90 g                                    |                  |
| Power supply                           |   |                  |
| Rated voltage                          | 19.2...30 V DC                          |                  |
| Power consumption                      | 1 W                                     |                  |
| Performance under reference conditions |   |                  |
| Response time                          | < 50 ms                                 |                  |

1) Values at 24 V and  $R_b = 0 \Omega$  and 20 mA

2) Values at 24 V and  $R_b = 50 \Omega$  and 20 mA

$R_b$  = Jumper resistor on pin 4, 5 or 3, 6

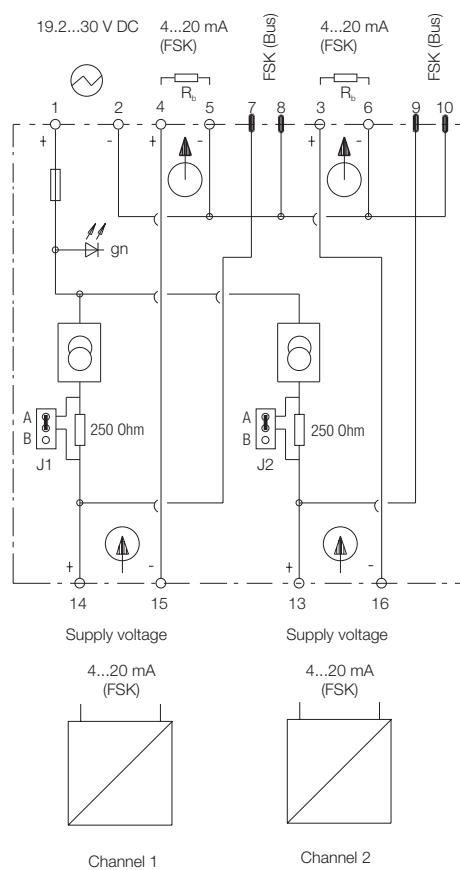

## Functions of the plug-in jumpers J1:

**J1/J2**      HART communication  
 A = without resistor 250 Ohm  
 B = with resistor 250 Ohm




The positions illustrated on the circuit diagram represent standard adjustments (delivery status)



# Isolating Power Supply

V17151-21

1 channel
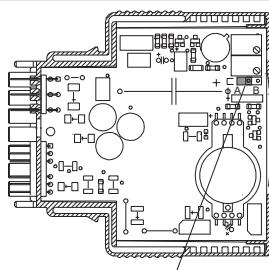
| <ul style="list-style-type: none"> <li>• Power supply for loop powered transmitters</li> <li>• Isolating driver for 4...20 mA</li> <li>• Wire break monitoring output overrange/underrange (Jumper J1)</li> </ul> | <br><b>J1</b><br><br><b>Module size 2</b>  |        |           |            |                |            |                |            |                |            |   |
|---|---|--------|-----------|------------|----------------|------------|----------------|------------|----------------|------------|---|
| <b>Output</b><br><br>Transformation ratio 1:1<br>Residual ripple (peak-to-peak) < 0.25 %<br>Output signal short-circuit proof    | <b>Module fits for:</b><br><table border="1"> <thead> <tr> <th>Socket</th> <th>Backplane</th> </tr> </thead> <tbody> <tr> <td>V17111-100</td> <td>● V17111-2 _ _</td> </tr> <tr> <td>V17111-110</td> <td>● V17111-3 _ _</td> </tr> <tr> <td>V17111-120</td> <td>● V17111-6 _ _</td> </tr> <tr> <td>V17111-130</td> <td>●</td> </tr> </tbody> </table> | Socket | Backplane | V17111-100 | ● V17111-2 _ _ | V17111-110 | ● V17111-3 _ _ | V17111-120 | ● V17111-6 _ _ | V17111-130 | ● |
| Socket  | Backplane   |        |           |            |                |            |                |            |                |            |   |
| V17111-100  | ● V17111-2 _ _  |        |           |            |                |            |                |            |                |            |   |
| V17111-110  | ● V17111-3 _ _  |        |           |            |                |            |                |            |                |            |   |
| V17111-120  | ● V17111-6 _ _  |        |           |            |                |            |                |            |                |            |   |
| V17111-130  | ●   |        |           |            |                |            |                |            |                |            |   |
| <b>Type</b> Signal Wire break Short-circuit Load  | 0...5 mA<br>0...10 V<br>0...20 mA<br>19.2...30 V DC 4...20 mA   |        |           |            |                |            |                |            |                |            |   |
| V17151-210 4...20 mA < 0.1 > 22 mA 23...30 mA 0...600 Ω   | 0...5 mA  |        |           |            |                |            |                |            |                |            |   |
| V17151-211 0...20 mA 0 > 22 mA 23...30 mA 0...600 Ω   | 0...10 V  |        |           |            |                |            |                |            |                |            |   |
| V17151-212 0...10 V 0 > 11 V — > 10 kΩ  | 0...20 mA   |        |           |            |                |            |                |            |                |            |   |
| V17151-213 0...5 mA 0 > 5.13 mA — 0...2.4 kΩ  | 19.2...30 V DC 4...20 mA  |        |           |            |                |            |                |            |                |            |   |
| <b>Input</b><br><br>Input current 4...20 mA<br>Short circuit current 23...30 mA<br>Residual ripple (peak-to-peak) < 100 mV       | 1 2 4 5 3 6<br>+ - + - + -<br>gn  |        |           |            |                |            |                |            |                |            |   |
| <b>Isolating power supply</b> (terminal 14/15)<br>Supply voltage at 22.7 mA ≥ 14 V  | B /— A<br>J1  |        |           |            |                |            |                |            |                |            |   |
| <b>Isolating driver</b> (terminal 13/16)<br>Voltage drop < 1 V  | 14 15 13 16<br>+ - + -<br>4...20 mA (14 V)  |        |           |            |                |            |                |            |                |            |   |
| <b>General data</b><br>LED indicators, power "On" (green)   |   |        |           |            |                |            |                |            |                |            |   |
| <b>Isolation</b><br>Input – output/power supply 2.3 kV<br>Max. ambient temperature -20...+60 °C<br>Weight 90 g  |    |        |           |            |                |            |                |            |                |            |   |
| <b>Power supply</b><br><br>Rated voltage 19.2...30 V DC<br>Power consumption 1.05 W  |    |        |           |            |                |            |                |            |                |            |   |
| <b>Performance under reference conditions</b><br>Linearity deviation < 0.1 %<br>Error limit < 0.25 %<br>Temperature effect < 0.1 %/10 K<br>Impedance effect < 0.05 %<br>Response time < 50 ms                     | <b>Functions of the plug-in jumpers J.:</b><br><b>J1</b> Wire break monitoring<br>A = without<br>B = with   |        |           |            |                |            |                |            |                |            |   |

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

## Isolating Power Supply

1 channel


V17151-21\_


| Ordering information                     |           | Catalog No. |
|--|-----------|-------------|
| <b>Isolating Power Supply, 1 channel</b> |           | V17151-21_  |
| Output                                   | 4...20 mA | 0           |
|  | 0...20 mA | 1           |
|  | 0...10 V  | 2           |
|  | 0...5 mA  | 3           |

# Isolating Power Supply

V17151-22

1 channel, HART
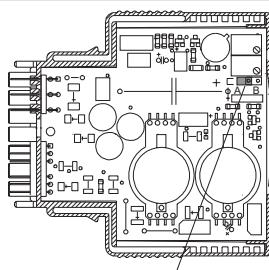
| <ul style="list-style-type: none"> <li>• Power supply for loop powered HART transmitters</li> <li>• Point to point communication</li> <li>• Wire break monitoring output overrange/underrange (Jumper J1)</li> </ul> | <br><b>J1</b><br>Module size 2   |        |           |              |              |              |              |              |              |              |  |
|--|--|--------|-----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--|
| <b>Output</b><br><br>Transformation ratio 1:1<br>Residual ripple (peak-to-peak) < 0.25 %<br>Output signal short-circuit proof       | <b>Module fits for:</b><br><table border="1"> <thead> <tr> <th>Socket</th> <th>Backplane</th> </tr> </thead> <tbody> <tr> <td>V17111-100 ●</td> <td>V17111-2 _ _</td> </tr> <tr> <td>V17111-110 ●</td> <td>V17111-3 _ _</td> </tr> <tr> <td>V17111-120 ●</td> <td>V17111-6 _ _</td> </tr> <tr> <td>V17111-130 ●</td> <td></td> </tr> </tbody> </table> | Socket | Backplane | V17111-100 ● | V17111-2 _ _ | V17111-110 ● | V17111-3 _ _ | V17111-120 ● | V17111-6 _ _ | V17111-130 ● |  |
| Socket   | Backplane  |        |           |              |              |              |              |              |              |              |  |
| V17111-100 ●   | V17111-2 _ _   |        |           |              |              |              |              |              |              |              |  |
| V17111-110 ●   | V17111-3 _ _   |        |           |              |              |              |              |              |              |              |  |
| V17111-120 ●   | V17111-6 _ _   |        |           |              |              |              |              |              |              |              |  |
| V17111-130 ●   |  |        |           |              |              |              |              |              |              |              |  |
| <b>Type</b> Signal Wire break Short-circuit Load   |  |        |           |              |              |              |              |              |              |              |  |
| V17151-220 4...20 mA < 0.1 > 22 mA 23...30 mA 0...600 $\Omega$   |  |        |           |              |              |              |              |              |              |              |  |
| V17151-221 0...20 mA 0 > 22 mA 23...30 mA 0...600 $\Omega$   |  |        |           |              |              |              |              |              |              |              |  |
| V17151-222 0...10 V 0 > 11 V – > 10 k $\Omega$   |  |        |           |              |              |              |              |              |              |              |  |
| <b>Communication</b>   |  |        |           |              |              |              |              |              |              |              |  |
| via terminals 3/6  |  |        |           |              |              |              |              |              |              |              |  |
| via mA signal  |  |        |           |              |              |              |              |              |              |              |  |
| Permeable protocol HART  |  |        |           |              |              |              |              |              |              |              |  |
| Bandwidth 500 Hz...10 kHz  |  |        |           |              |              |              |              |              |              |              |  |
| <b>Input</b><br>  |  |        |           |              |              |              |              |              |              |              |  |
| Input current 4...20 mA  |  |        |           |              |              |              |              |              |              |              |  |
| Supply voltage at 22.7 mA $\geq$ 14 V  |  |        |           |              |              |              |              |              |              |              |  |
| Short circuit current 23...30 mA   |  |        |           |              |              |              |              |              |              |              |  |
| Residual ripple (peak-to-peak) < 100 mV  |  |        |           |              |              |              |              |              |              |              |  |
| <b>General data</b>  |  |        |           |              |              |              |              |              |              |              |  |
| LED indicators, power "On" (green)   |  |        |           |              |              |              |              |              |              |              |  |
| <b>Isolation</b>   |  |        |           |              |              |              |              |              |              |              |  |
| Input – output/power supply/FSK 2.3 kV   |  |        |           |              |              |              |              |              |              |              |  |
| Max. ambient temperature -20...+60 °C  |  |        |           |              |              |              |              |              |              |              |  |
| Weight 90 g  |  |        |           |              |              |              |              |              |              |              |  |
| <b>Power supply</b><br>   |  |        |           |              |              |              |              |              |              |              |  |
| Rated voltage 19.2...30 V DC   |  |        |           |              |              |              |              |              |              |              |  |
| Power consumption 1.05 W   |  |        |           |              |              |              |              |              |              |              |  |
| <b>Performance under reference conditions</b>  |  |        |           |              |              |              |              |              |              |              |  |
| Linearity deviation < 0.1 %  |  |        |           |              |              |              |              |              |              |              |  |
| Error limit < 0.25 %   |  |        |           |              |              |              |              |              |              |              |  |
| Temperature effect < 0.1 %/10 K  |  |        |           |              |              |              |              |              |              |              |  |
| Impedance effect < 0.05 %  |  |        |           |              |              |              |              |              |              |              |  |
| Response time < 50 ms  |  |        |           |              |              |              |              |              |              |              |  |

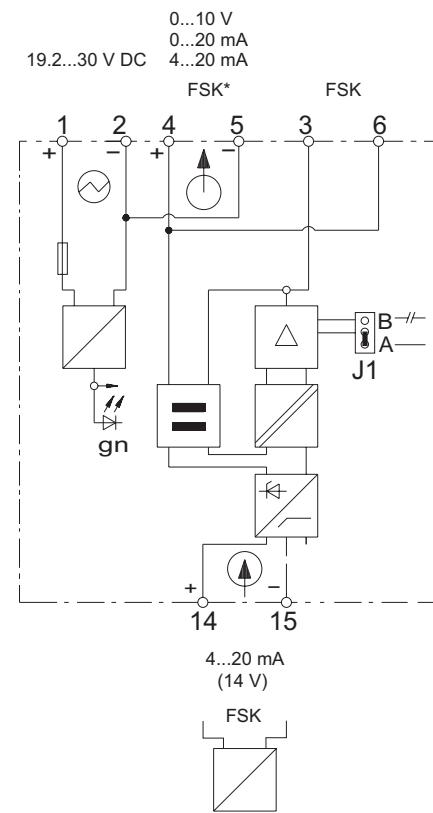

## Functions of the plug-in jumpers J.:

- J1** Wire break monitoring  
A = without  
B = with

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

\* FSK only at load  $\geq$  250  $\Omega$

## **Isolating Power Supply**

**V17151-22\_**

1 channel, HART



| <b>Ordering information</b>                    |           | Catalog No. |
|--|-----------|-------------|
| <b>Isolating Power Supply, 1 channel, HART</b> |           | V17151-22_  |
| Output   | 4...20 mA | 0           |
|  | 0...20 mA | 1           |
|  | 0...10 V  | 2           |

# Isolating Power Supply

V17151-320


1 channel, HART, FSK bus

- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication
- Output signal free of HART signal

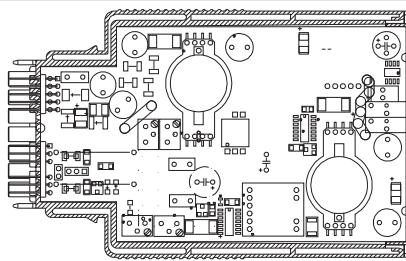

Module size 4

| <b>Output</b>                                 |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0..600 $\Omega$    |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 120 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 1.7 W              |
| Power dissipation                             | 1.4 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |


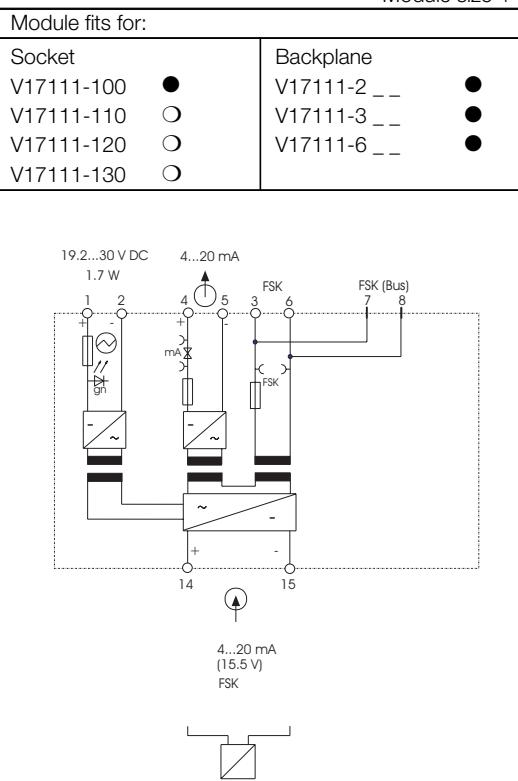


# Isolating Power Supply

V17151-325

1 channel, HART


- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication

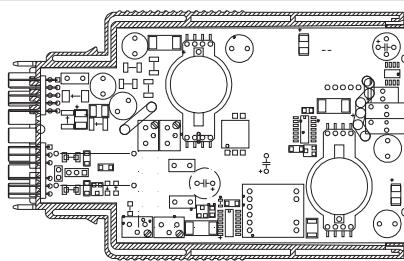

Module size 4

| <b>Output</b>                                 |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0...600 $\Omega$   |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via mA signal                                 |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 120 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 1.7 W              |
| Power dissipation                             | 1.4 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

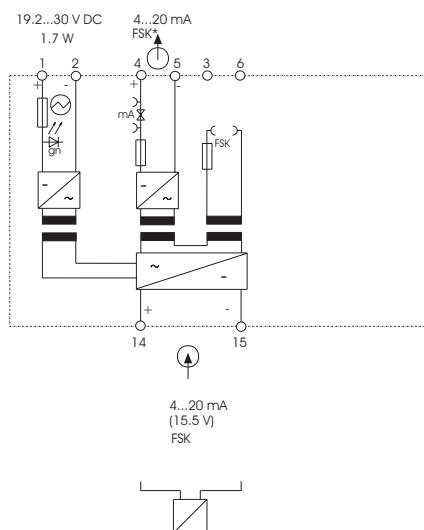


\* FSK only at load  $\geq 250 \Omega$

# Isolating Power Supply

V17151-340


2 channels, HART, FSK bus

- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

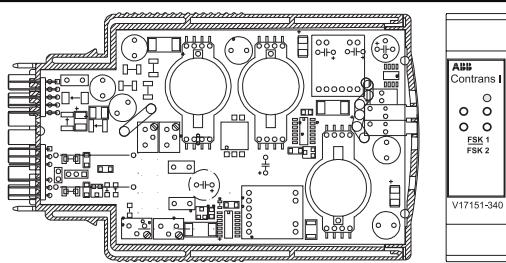

Module size 4

| <b>Output</b> per channel                     |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0...600 $\Omega$   |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b> per channel              |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b> per channel                      |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b> per channel                  |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| <b>Isolation</b> channel 1 – channel 2        |                    |
| Input 1 – input 2                             | 500 V              |
| Output 1 – output 2                           | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 140 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 3.1 W              |
| Power dissipation                             | 2.45 W             |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

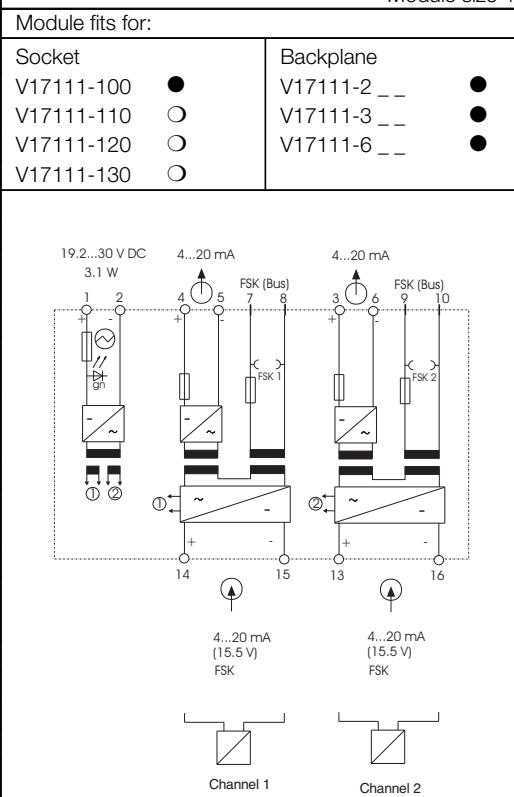


# Isolating Power Supply

V17151-350

2 outputs, HART, FSK bus


- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

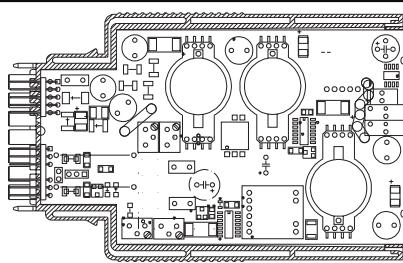

Module size 4

| <b>Output</b> output 1/output 2               |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0..600 $\Omega$    |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output 1/output 2/power supply/FSK    | 2.3 kV             |
| Output 1 – output 2 – power supply – FSK      | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 140 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 2.6 W              |
| Power dissipation                             | 2.3 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |


| Module fits for: |   |
|------------------|---|
| Socket           |   |
| V17111-100       | ● |
| V17111-110       | ○ |
| V17111-120       | ○ |
| V17111-130       | ○ |
| Backplane        |   |
| V17111-2 _ _     | ● |
| V17111-3 _ _     | ● |
| V17111-6 _ _     | ● |

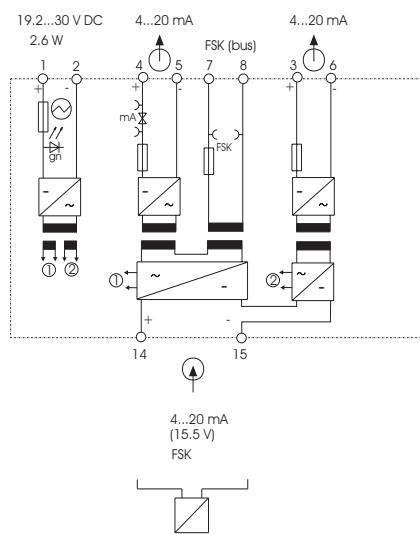


# Loop Powered Input Isolator

V17151-413


2 channels
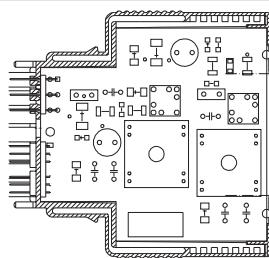
|  |   |
|--|---|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for standard signals 0(4)...20 mA<br/>(I/P converter, positioner)</b></li> <li><b>Low voltage drop</b></li> </ul> | <br> |
|  | Module size 2   |
| <b>Output</b> per channel  |   |
| Output current (short-circuit proof)   | (0)4...20 mA  |
| Transformation ratio   | 1:1   |
| Detect. of overranging (input, approx.)  | > 23.6 mA, max. 40 mA   |
| Load   | 0...750 $\Omega$  |
| <b>Input</b> per channel   |   |
| Input current  | (0)4...20 mA  |
| Overranging  | > 23.6 mA, max. 40 mA   |
| <b>General data</b>  |   |
| Voltage drop   | < 1.5 V   |
| <b>Isolation</b>   |   |
| Input – output   | 1.35 kV   |
| Channel 1 – channel 2  | 500 V   |
| Max. ambient temperature   | -20...+60 °C  |
| Weight   | 90 g  |
| <b>Performance under reference conditions</b>  |   |
| Linearity deviation  | < 0.1 %   |
| Error limit  | < 0.1 %   |
| Temperature effect   | < 0.1 %/10 K  |
| Impedance effect   | < 0.18 %  |
| Response time  | < 50 ms   |

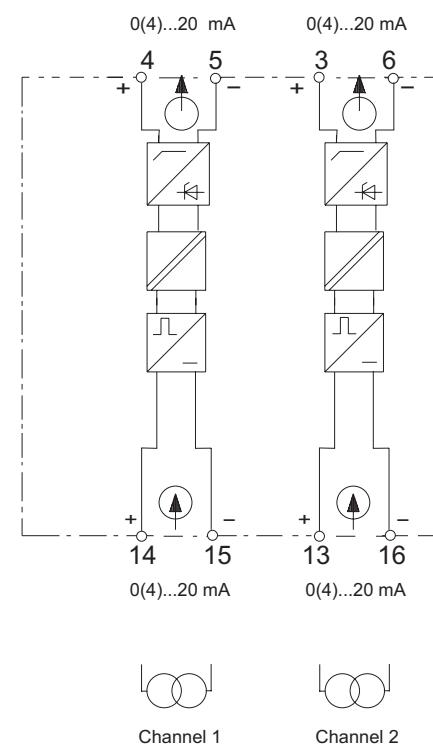

1 channel, HART, FSK bus


- Input isolator for extra powered HART transmitters (Flowmeters)
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication
- Output signal free of HART signal

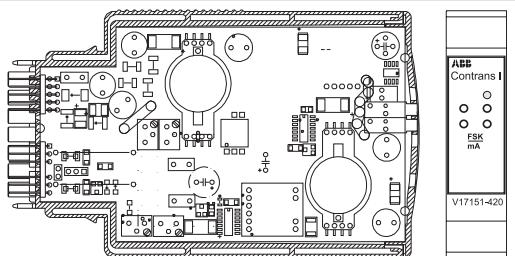


Module size 4


| <b>Output</b>                                 |                  |
|---|------------------|
| Output current (short-circuit proof)          | 4...20 mA        |
| Transformation ratio                          | 1:1              |
| Detect. of wire break (input)                 | < 0.1 mA         |
| Detect. of overranging (input, approx.)       | 23...28 mA       |
| Load  | 0...600 $\Omega$ |
| Residual ripple (peak-to-peak)                | < 0.25 %         |
| <b>Communication</b>                          |                  |
| via FSK bus (backplane/FSK bus amplifier)     |                  |
| via jacks 2 x 2 mm (front)                    |                  |
| Permeable protocol                            | HART             |
| Bandwidth                                     | 500 Hz...10 kHz  |
| <b>Input</b>                                  |                  |
| Input current                                 | 4...20 mA        |
| Voltage drop in input                         | < 2 V            |
| <b>General data</b>                           |                  |
| LED indicators, power "On" (green)            |                  |
| <b>Isolation</b>                              |                  |
| Input – output/power supply/FSK               | 2.3 kV           |
| Output – power supply – FSK                   | 500 V            |
| Max. ambient temperature                      | -20...+60 °C     |
| Weight  | 120 g            |
| <b>Power supply</b>                           |                  |
| Rated voltage                                 | 19.2...30 V DC   |
| Power consumption                             | 1.1 W            |
| Power dissipation                             | 1.1 W            |
| <b>Performance under reference conditions</b> |                  |
| Linearity deviation                           | < 0.1 %          |
| Error limit                                   | < 0.25 %         |
| Temperature effect                            | < 0.1 %/10 K     |
| Impedance effect                              | < 0.05 %         |
| Response time                                 | < 50 ms          |

| Module fits for: |   |
|------------------|---|
| Socket           |   |
| V17111-100       | ● |
| V17111-110       | ○ |
| V17111-120       | ○ |
| V17111-130       | ○ |
| Backplane        |   |
| V17111-2 _ _     | ● |
| V17111-3 _ _     | ● |
| V17111-6 _ _     | ● |

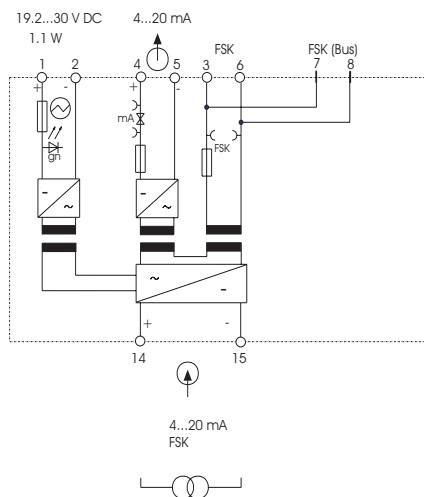



1 channel V, mA
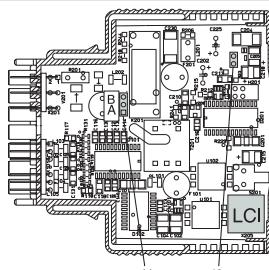
|   |   |
|---|---|
| <ul style="list-style-type: none"> <li><b>Input isolator for direct current or direct voltage signals</b></li> <li><b>free adjustable measuring ranges</b></li> <li><b>Definition of parameters via LCI interface<br/>(does not require an additional power supply)</b></li> <li><b>Relay output for alarm</b></li> </ul> |  <p>Module size 2</p> |
| <b>Output</b> (open and short-circuit proof)  |                        |
| Type  | Full modulation span Load   |
| V17151-430  | 0/4...20 mA (0/3.8...20,5 mA) 0...600 Ω   |
| V17151-432  | 0/2...10 V (0/1.9...10.25 V) > 100 kΩ   |
| V17151-433  | 0...5 mA (0...5.13 mA) 0...2.4 kΩ   |
| V17151-434  | 0/1...5 V (0/0.95...5.13 V) > 50 kΩ   |
| Residual ripple   | < 0.25 % (peak-to-peak)   |
| Damping   | 0...30 s  |
| <b>Binary output</b>  |   |
| Triggering (adjustable via software)  | alarm set point, wire break   |
| Relay contact (via jumper J1)   | 1 x NO/NC   |
| Contact ratings   | 250 V AC; 1 A; cosφ >0.7; 560 VA  |
|   | 30 V DC; 2 A; 60 W resistive load   |
| Parameterization  | via software  |
|   | or customer-specific  |
| Accessories   | PC with programming software  |
|   | LCI adapter (connection to PC)  |
| <b>Input</b> (open and short-circuit proof)   |                      |
| Sensors   | V, mA   |
| Measuring ranges  | full modulation span load min. meas. span   |
| -25...+25 mA  | 5 Ω 0.5 mA  |
| -12.5...+12.5 V   | > 100 kΩ 300 mV   |
| Customer specific (max. tie points)   | 60  |
| <b>General data</b>   |   |
| LED indicator   | power "On" (green)  |
|   | switching state relay (red)   |
| <b>Isolation</b>  |   |
| Input – output/power supply   | 2.3 kV  |
| Max. ambient temperature  | -20...+60 °C  |
| Weight  | 90 g  |
| <b>Power supply</b>   |                      |
| Connection  | terminals 1(+); 2(-)  |
| Rated voltage   | 19.2...30 V DC  |
| Power consumption   | approx. 1.0 W   |
| <b>Performance under reference conditions</b>   |   |
| Linearity deviation   | < 0.1 %   |
| Error limit   | < 0.1 %   |
| Temperature effect  | < 0.1 %/10 K  |
| Impedance effect  | < 0,05 %<br>in the load range of 0...600 Ω  |
| Response time   | < 250 ms  |

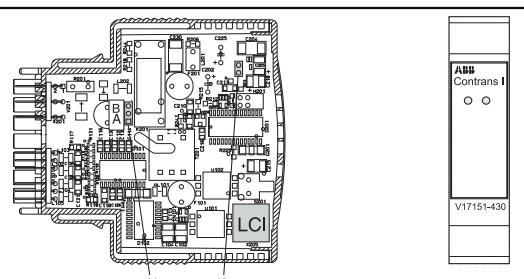

Module fits for:

| Socket     | Backplane      |
|------------|----------------|
| V17111-100 | ● V17111-2 _ _ |
| V17111-110 | ● V17111-3 _ _ |
| V17111-120 | ● V17111-6 _ _ |
| V17111-130 | ●              |

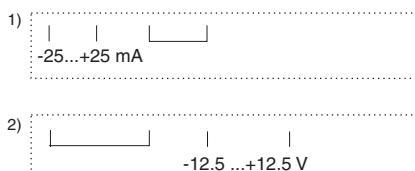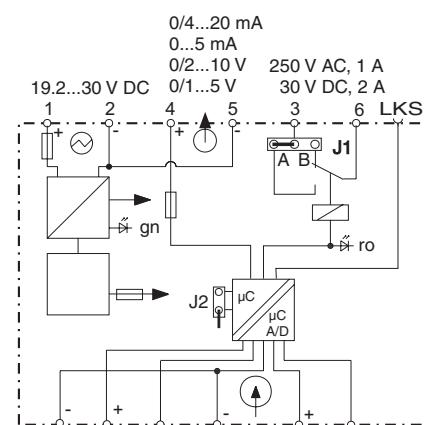**Functions of the plug-in jumpers J::**

**J1** Relay output  
A = NC  
B = NO

**J2** Parameterization  
enable  
disable



The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

Standard parameters:  
(delivered state, no specifications if customer-specific)  
Sensor: mA sensor

Measuring method: single  
Measuring range: 4...20 mA, acc. top connection diagram 1  
Output: 4...20 mA, 0...5 mA, 0...10 V, 0...5 V, depending on type  
Digital output (measured value signalling): not active  
Can be parameterized for measuring range 0...10 V

**Input Isolator, parameterizable****V17151-43\_**


1 channel V, mA

| <b>Ordering information</b>                                       |             | Catalog No. |
|---|-------------|-------------|
| <b>Input Isolator, 1 channel, V, mA</b>                           |             | V17151-43_  |
| Output  | 0/4...20 mA | 0           |
|   | 0/2...10 V  | 2           |
|   | 0...5 mA    | 3           |
|   | 0/1...5 V   | 4           |
| <b>Accessories</b>  |             |             |
| Programming software (without customer-specified characteristic)* |             | 7957781     |
| LCI adapter   |             | 0317135     |

\* with customer-specified characteristic use SMART VISION


2 channels, HART, FSK bus

- Input isolator for extra powered HART transmitters (Flowmeters)
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

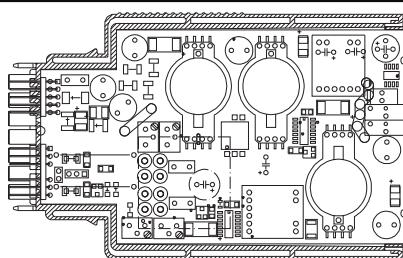

Modulgröße 4

| <b>Output</b> per channel                     |                  |
|---|------------------|
| Output current (short-circuit proof)          | 4...20 mA        |
| Transformation ratio                          | 1:1              |
| Detect. of wire break (input)                 | < 0.1 mA         |
| Detect. of short-circuit (input, approx.)     | 23...28 mA       |
| Load  | 0...600 $\Omega$ |
| Residual ripple (peak-to-peak)                | < 0.25 %         |
| <b>Communication</b> per channel              |                  |
| via FSK bus (backplane/FSK bus amplifier)     |                  |
| via jacks 2 x 2 mm (front)                    |                  |
| Permeable protocol                            | HART             |
| Bandwidth                                     | 500 Hz...10 kHz  |
| <b>Input</b> per channel                      |                  |
| Input current                                 | 4...20 mA        |
| Short circuit current                         | 23...28 mA       |
| Residual ripple (peak-to-peak)                | < 100 mV         |
| Voltage drop in input                         | < 2 V            |
| <b>General data</b>                           |                  |
| LED indicators, power "On" (green)            |                  |
| <b>Isolation</b> per channel                  |                  |
| Input – output/power supply/FSK               | 2.3 kV           |
| Output – power supply – FSK                   | 500 V            |
| <b>Isolation</b> channel 1 – channel 2        |                  |
| Input 1 – input 2                             | 500 V            |
| Output 1 – output 2                           | 500 V            |
| Max. ambient temperature                      | -20...+60 °C     |
| Weight  | 140 g            |
| <b>Power supply</b>                           |                  |
| Rated voltage                                 | 19.2...30 V DC   |
| Power consumption                             | 1.9 W            |
| Power dissipation                             | 1.9 W            |
| <b>Performance under reference conditions</b> |                  |
| Linearity deviation                           | < 0.1 %          |
| Error limit                                   | < 0.25 %         |
| Temperature effect                            | < 0.1 %/10 K     |
| Impedance effect                              | < 0.05 %         |
| Response time                                 | < 50 ms          |

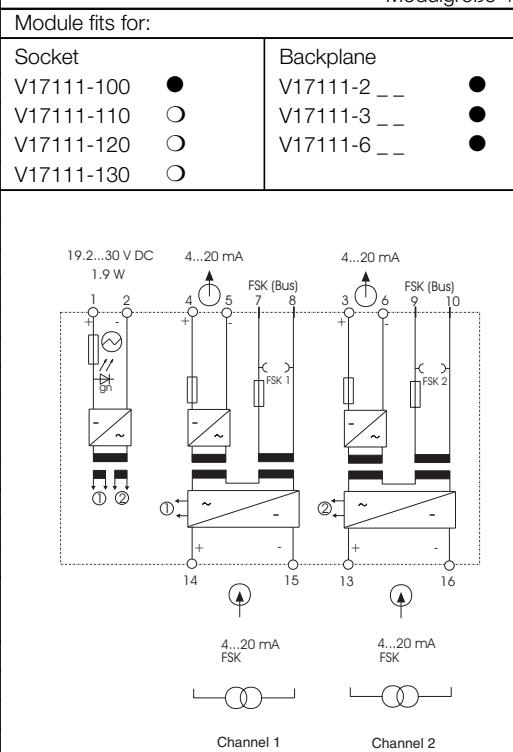





# Input Isolator, universal

1 channel, V, mA

V17151-480

- Input isolator for direct current or direct voltage signals
- Setting of the input and output ranges with DIP switches
- Supply voltages from 20...253 V AC/DC

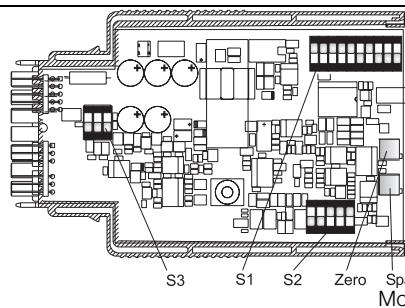


Module fits for:

| Socket     | Backplane* |
|------------|------------|
| V17111-100 | ●          |
| V17111-110 | ●          |
| V17111-120 | ○          |
| V17111-130 | ○          |

\*) only 19.2...30 V DC power supply

22...230 V AC/DC      mA, V  
± 10%

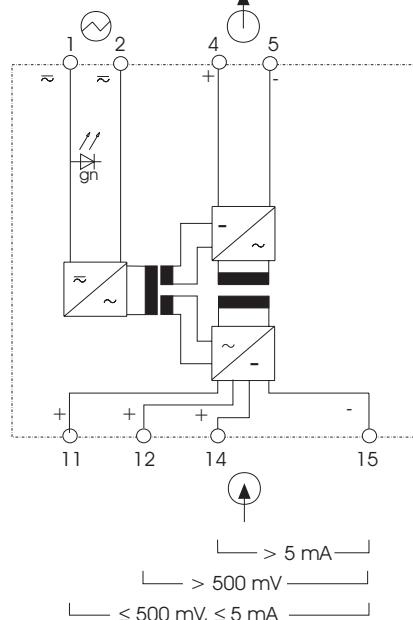

Factory setting: 4...20 mA on the input and output

The settings described here are only some possibilities out of a wide range.

Please use the Unisoft configuration program for exact setting.

| Output                                     |   |          |          |          |
|--|---|----------|----------|----------|
| Current                                    | 20 mA uni-/bipolar; 4...20 mA                         |          |          |          |
| Voltage                                    | 5 V, 10 V uni-/bipolar;                               |          |          |          |
|  | 1...5 V, 2...10 V                                     |          |          |          |
| Offset off output span of select           | -100%, -50%, 0%, 50%, 100%                            |          |          |          |
| Load at 20 mA                              | ≤ 600 Ω   |          |          |          |
| Load at 10 V                               | ≥ 1 kΩ  |          |          |          |
| Offset error                               | < 20 μA/< 10 mV                                       |          |          |          |
| Residual ripple (effective)                | < 10 mV   |          |          |          |
| Input                                      |   |          |          |          |
| Measurement                                | 0.1...100 mA; 20 mV...200 V                           |          |          |          |
| Measuring range                            | ≤ 5 mA  | > 5 mA   | ≤ 500 mV | > 500 mV |
| Input resistance approx.                   | 100 Ω   | 5 Ω      | 1 MΩ     | 1 MΩ     |
| Overload                                   | ≤ 100 mA  | ≤ 300 mA | ≤ 20 mA  | ≤ 3 mA   |
| Adjustment range ZERO pot                  | ± 25 % of the output range                            |          |          |          |
| Adjustment range SPAN pot                  | 0.3...3.30 from the final value<br>of the input range |          |          |          |
| Bandwidth                                  | >10 kHz, < 10 Hz, adjustable                          |          |          |          |
| General data                               |   |          |          |          |
| LED indicator, power "On" (green)          |   |          |          |          |
| Isolation                                  |   |          |          |          |
| Input – output                             | 2.3 kV  |          |          |          |
| Output – power supply                      | 2.3 kV  |          |          |          |
| Max. ambient temperature                   | -20...+60 °C  |          |          |          |
| Weight                                     | 120 g   |          |          |          |
| Power supply                               |   |          |          |          |
| Rated voltage                              | 19.2 V DC/20...253 V AC/DC                            |          |          |          |
| Power consumption                          | 2 VA AC, 48...62 Hz, 0.9 W DC                         |          |          |          |
| Characteristics under reference conditions |   |          |          |          |
| Error limit                                | < 0.1 % from final value                              |          |          |          |
| Temperature effect                         | < 60 ppm/K from final value                           |          |          |          |

**Settings DIP counter:**

| Input ranges                                       |        | S1 |   |   |   |      | S2 |   |   |   |      |
|--|--------|----|---|---|---|------|----|---|---|---|------|
| Input settings                                     | Switch | 1  | 2 | 3 | 4 | 5-10 | 1  | 2 | 3 | 4 | 5-10 |
| Range  |        |    |   |   |   |      |    |   |   |   |      |
| 0...±60 mV   |        |    |   |   | X |      |    |   | ● | X |      |
| 0...±100 mV  | ●      |    |   |   | X |      |    |   | ● | X |      |
| 0...±150 mV  | ●      | ●  |   |   | X |      |    | ● | X |   |      |
| 0...±300 mV  | ●      | ●  |   |   | X |      |    | ● | X |   |      |
| 0...±500 mV  | ●      | ●  | ● |   | X |      |    | ● | X |   |      |
| 0...±1 V   | ●      | ●  |   |   | X |      | ●  |   | ● | X |      |
| 0...±5 V   | ●      | ●  | ● |   | X |      | ●  |   | ● | X |      |
| 0...±10 V  | ●      | ●  | ● |   | X |      | ●  |   | ● | X |      |
| 0...±100 V   |        |    |   | ● | X |      |    | ● | ● | X |      |
| 0...±0.3 mA  | ●      |    |   | ● | X |      | ●  |   | ● | X |      |
| 0...±1 mA  | ●      |    |   | ● | X |      | ●  |   | ● | X |      |
| 0...±5 mA  | ●      | ●  |   | ● | X |      | ●  |   | ● | X |      |
| 0...±10 mA   | ●      | ●  | ● |   | X |      | ●  |   | ● | X |      |
| 0...±20 mA   | ●      | ●  | ● | X |   |      | ●  |   | ● | X |      |
| 0...±50 mA   | ●      | ●  | ● | ● | X |      | ●  |   | ● | X |      |
| ○ 0...20 mA  | ●      | ●  | ● | ● | X |      | ●  |   | ● | X |      |
| Variable with SPAN Pot:<br>30...330% of sel. range | X      | X  | X | X | X | X    | X  | X | X | X |      |

| Output ranges, displacement and limit frequency/damping |        | S1  |   |   |    |      | S2 |   |   |   |  |
|---|--------|-----|---|---|----|------|----|---|---|---|--|
| Output settings   | Switch | 1   | 2 | 3 | 4  | 8-10 | 1  | 2 | 3 |   |  |
| Range   |        |     |   |   |    |      |    |   |   |   |  |
| 0...±10 V   |        | X   |   |   |    |      | X  | ● | ● | X |  |
| 2...10 V  |        | X   | ● |   |    |      | X  | ● | ● | X |  |
| 0...±5 V  |        | X   |   |   | ●  |      | X  | ● | ● | X |  |
| 1...5 V   |        | X   | ● | ● |    |      | X  | ● | ● | X |  |
| 0...±20 mA  | X      |     |   |   | ●  | X    |    |   |   | X |  |
| ○ 4...20 mA   | X      | ●   |   | ● | X  |      |    |   |   | X |  |
| Switch  |        | S1  |   |   |    |      | S2 |   |   |   |  |
| Offset  |        | 1-7 | 8 | 9 | 10 | 1-3  | 4  | 5 |   |   |  |
| ○ 0 %   | X      |     |   |   |    | X    | X  | ● |   |   |  |
| -100 %  | X      | ●   |   |   |    | X    | X  | ● |   |   |  |
| -50 %   | X      |     | ● |   |    | X    | X  | ● |   |   |  |
| +50 %   | X      | ●   | ● |   |    | X    | X  | ● |   |   |  |
| +100 %  | X      |     |   | ● | X  | X    | X  | ● |   |   |  |
| Variable with ZERO Pot:<br>0...±25% of span             | X      | X   | X | X | X  | X    | X  | X |   |   |  |
| Switch  |        | S3  |   |   |    |      |    |   |   |   |  |
| Bandwidth   |        | 1-2 |   |   |    |      | 3  |   |   |   |  |
| ○ 10 kHz  |        | X   |   |   |    |      |    |   |   |   |  |
| 10 Hz   |        | X   | ● |   |    |      |    |   |   |   |  |

**Warning:**

Do not configure the module under power!

When making the fine adjustment, use a screw driver that is safely isolated from the input voltage for setting the potentiometer!


# Loop Powered Supply Ex

1 channel

V17151-510





- Power supply for loop powered transmitters
- Electrical isolation for current signals with transmitter power supply

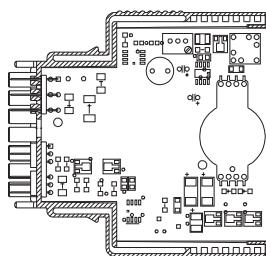



Module size 2

| <b>Output</b>                                 |                         | (safe area)      | Module fits for: |
|---|-------------------------|------------------|------------------|
| Output current (short-circuit proof)          | 4...20 mA               | Socket           | Backplane        |
| Transformation ratio                          | 1:1                     | V17111-100       | V17111-2 _ _     |
| Detect. of wire break (input)                 | < 400 µA                | V17111-110       | V17111-3 _ _     |
| Supply voltage                                | 18.5...30 V             | V17111-120       | V17111-6 _ _     |
|   |                         | V17111-130       |                  |
| <b>Input</b>                                  |                         | (hazardous area) |                  |
| Input current (short-circuit proof)           | 4...20 mA               |                  |                  |
| Supply voltage                                | > 13.5 V                |                  |                  |
| Short-circuit current                         | 23...30 mA              |                  |                  |
| <b>Explosion protection</b>                   |                         | [EEx ib] IIC     |                  |
| Certificate of conformity                     | PTB No. 00 ATEX 2017    |                  |                  |
| Max. short-circuit current                    | $I_o = 28.5 \text{ mA}$ |                  |                  |
| Max. voltage                                  | $U_o = 20 \text{ V}$    |                  |                  |
| Max. power                                    | $P_o = 570 \text{ mW}$  |                  |                  |
| Permitted external inductance                 | $L_a = 1.3 \text{ mH}$  |                  |                  |
| Permitted external capacitance                | $C_a = 95 \text{ nF}$   |                  |                  |
| <b>General data</b>                           |                         |                  |                  |
| <b>Isolation</b>                              |                         |                  |                  |
| Input – output                                | 2.3 kV                  |                  |                  |
| Max. ambient temperature                      | -20...+60 °C            |                  |                  |
| Weight  | 90 g                    |                  |                  |
| <b>Performance under reference conditions</b> |                         |                  |                  |
| Linearity deviation                           | < 0.1 %                 |                  |                  |
| Error limit                                   | < 0.25 %                |                  |                  |
| Temperature effect                            | < 0.1 %/10 K            |                  |                  |
| Impedance effect                              | < 0.05 %                |                  |                  |
| Response time                                 | < 50 ms                 |                  |                  |

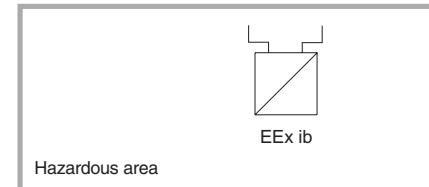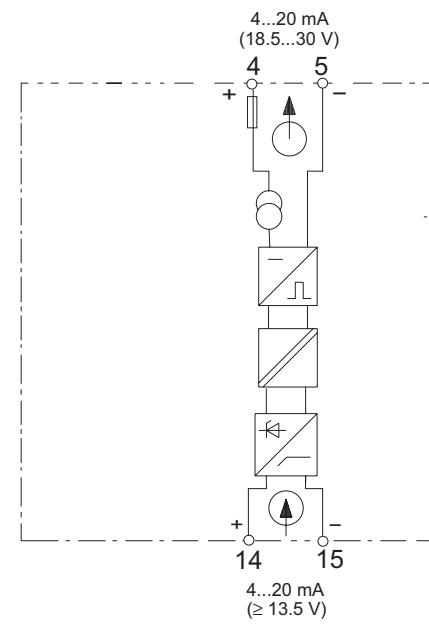

Hazardous area



- Electrical isolation for current signals with transmitter power supply and HART communication
- Point to point communication

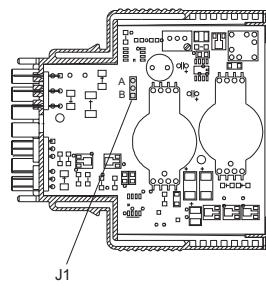

Module size 2

## Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ○         |
| V17111-130 | ○         |

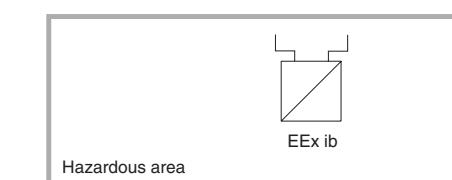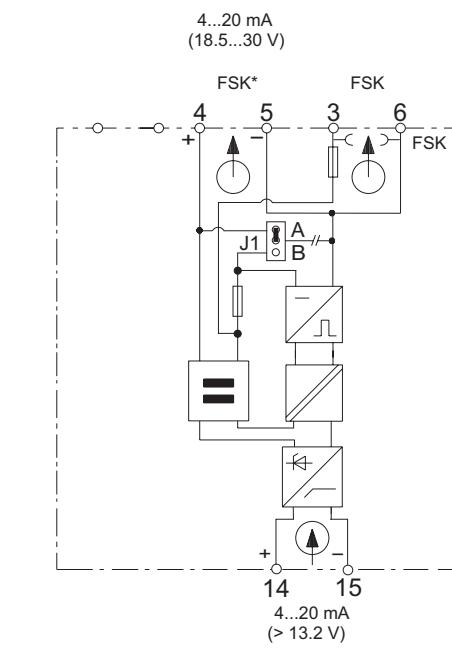

## Functions of the plug-in jumpers J.:

**J1**      HART communication  
 A = via terminals 3/6 (delivery status)  
 B = via terminals 4/5

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

\* FSK only at load  $\geq 250 \Omega$



# Isolating Power Supply Ex

1 channel

V17151-61\_




- Power supply for loop powered transmitters
- Isolating driver for 4...20 mA
- Wire break monitoring output overrange/underrange (Jumper J1)

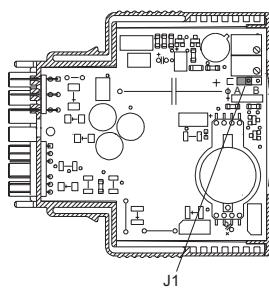

Module size 2

| Output   |                          |               |               | (safe area)        | Module fits for:   |           |
|--|--------------------------|---------------|---------------|--------------------|--|-----------|
| Type   | Signal                   | Wire break    | Short-circuit | Load               | Socket   | Backplane |
| V17151-610                                     | 4...20 mA                | < 0.1 > 22 mA | 23...30 mA    | 0...600 $\Omega$   | V17111-100   | ●         |
| V17151-611                                     | 0...20 mA                | 0 > 22 mA     | 23...30 mA    | 0...600 $\Omega$   | V17111-110   | ●         |
| V17151-612                                     | 0...10 V                 | 0 > 11 V      | —             | > 10 k $\Omega$    | V17111-120   | ●         |
| V17151-613                                     | 0 ... 5 mA               | 0 > 5.13 mA   | —             | 0...2.4 k $\Omega$ | V17111-130   | ●         |
| Input  |                          |               |               | (hazardous area)   | 19.2...30 V DC<br>0...5 mA<br>0...10 V<br>0...20 mA<br>4...20 mA |           |
| Input current                                  | 4...20 mA                |               |               |                    | 1 2 4 5 3 6  |           |
| Short circuit current                          | 23...28 mA               |               |               |                    | + - + - + -  |           |
| Residual ripple (peak-to-peak)                 | < 100 mV                 |               |               |                    | 14 15 13 16  |           |
| <b>Isolating power supply</b> (terminal 14/15) |                          |               |               |                    | 4...20 mA, (14 V)  |           |
| Supply voltage at 22.7 mA                      | ≥ 14 V                   |               |               |                    | A B  |           |
| <b>Explosion protection</b>                    |                          |               |               |                    | J1   |           |
| Certificate of conformity                      | [EEx ib] IIC             |               |               |                    | △  |           |
| Max. short-circuit current                     | PTB No. Ex-95.D.2188 X   |               |               |                    | gn   |           |
| Max. voltage                                   | I <sub>o</sub> = 28.5 mA |               |               |                    | +  |           |
| Max. power                                     | U <sub>o</sub> = 20 V    |               |               |                    | -  |           |
| Permitted external inductance                  | P <sub>o</sub> = 570 mW  |               |               |                    | -  |           |
| Permitted external capacitance                 | L <sub>a</sub> = 1.3 mH  |               |               |                    | -  |           |
| <b>Isolating driver</b> (terminal 13/16)       |                          |               |               |                    | -  |           |
| Voltage drop                                   | < 1 V                    |               |               |                    | 14 15 13 16  |           |
| <b>Explosion protection</b>                    |                          |               |               |                    | 4...20 mA, (14 V)  |           |
| Max. short-circuit current                     | [EEx ib] IIC             |               |               |                    | A B  |           |
| Max. voltage                                   | I <sub>o</sub> = 28.5 mA |               |               |                    | J1   |           |
| Max. power                                     | U <sub>o</sub> = 2.9 V   |               |               |                    | △  |           |
|  | P <sub>o</sub> = 82.6 mW |               |               |                    | gn   |           |
| <b>General data</b>                            |                          |               |               |                    |  |           |
| LED indicators, power "On" (green)             |                          |               |               |                    |  |           |
| <b>Isolation</b>                               |                          |               |               |                    |  |           |
| Input – output/power supply                    | 2.3 kV                   |               |               |                    |  |           |
| Max. ambient temperature                       | -20...+60 °C             |               |               |                    |  |           |
| Weight   | 90 g                     |               |               |                    |  |           |
| <b>Power supply</b>                            |                          |               |               |                    |  |           |
| Rated voltage                                  | 19.2...30 V DC           |               |               |                    |  |           |
| Power consumption                              | 1.05 W                   |               |               |                    |  |           |
| <b>Performance under reference conditions</b>  |                          |               |               |                    |  |           |
| Linearity deviation                            | < 0.1 %                  |               |               |                    |  |           |
| Error limit                                    | < 0.25 %                 |               |               |                    |  |           |
| Temperature effect                             | < 0.1 %/10 K             |               |               |                    |  |           |
| Impedance effect                               | < 0.05 %                 |               |               |                    |  |           |
| Response time                                  | < 50 ms                  |               |               |                    |  |           |

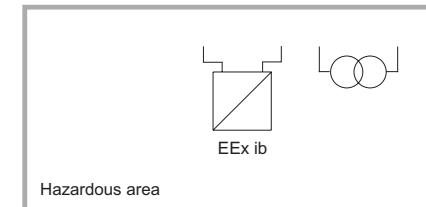

Functions of the plug-in jumpers J.:

J1      wire break monitoring  
A = without  
B = with

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

# Isolating Power Supply Ex

1 channel

V17151-61\_ 

| Ordering information                        |           | Catalog No. |
|---|-----------|-------------|
| <b>Isolating Power Supply Ex, 1 channel</b> |           | V17151-61_  |
| Output                                      | 4...20 mA | 0           |
|   | 0...20 mA | 1           |
|   | 0...10 V  | 2           |
|   | 0...5 mA  | 3           |



# Isolating Power Supply Ex

1 channel, HART

V17151-62





- Power supply for loop powered HART transmitters
- Point to point communication
- Wire break monitoring output overrange/underrange (Jumper J1)

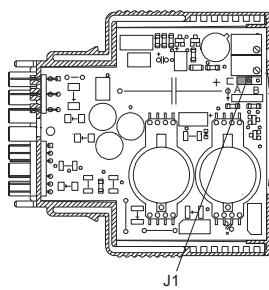

Module size 2

| Output                                 |                          |               |               | (safe area)      | Module fits for:   |   |  |
|--|--------------------------|---------------|---------------|------------------|--|---|--|
| Type                                   | Signal                   | Wire break    | Short-circuit | Load             | Socket<br>V17111-100<br>V17111-110<br>V17111-120<br>V17111-130 | Backplane<br>V17111-2 _ _<br>V17111-3 _ _<br>V17111-6 _ _ |  |
| V17151-620                             | 4...20 mA                | < 0.1 > 22 mA | 23...30 mA    | 0...600 $\Omega$ |  |   |  |
| V17151-621                             | 0...20 mA                | 0 > 22 mA     | 23...30 mA    | 0...600 $\Omega$ |  |   |  |
| V17151-622                             | 0...10 V                 | 0 > 11 V      | —             | > 10 k $\Omega$  |  |   |  |
| Communication                          |                          |               |               |                  |  |   |  |
| via terminals 3/6                      |                          |               |               |                  |  |   |  |
| via mA signal                          |                          |               |               |                  |  |   |  |
| Permeable protocol                     | HART                     |               |               |                  |  |   |  |
| Bandwidth                              | 500 Hz...10 kHz          |               |               |                  |  |   |  |
| Input                                  |                          |               |               |                  |  |   |  |
| Input current                          | 4...20 mA                |               |               |                  |  |   |  |
| Supply voltage at 22.7 mA              | $\geq 14$ V              |               |               |                  |  |   |  |
| Short circuit current                  | 23...28 mA               |               |               |                  |  |   |  |
| Residual ripple (peak-to-peak)         | < 100 mV                 |               |               |                  |  |   |  |
| Explosion protection                   |                          |               |               |                  |  |   |  |
| Certificate of conformity              | [EEx ib] IIC             |               |               |                  |  |   |  |
| Max. short-circuit current             | I <sub>o</sub> = 28.5 mA |               |               |                  |  |   |  |
| Max. voltage                           | U <sub>o</sub> = 20 V    |               |               |                  |  |   |  |
| Max. power                             | P <sub>o</sub> = 570 mW  |               |               |                  |  |   |  |
| Permitted external inductance          | L <sub>a</sub> = 1.3 mH  |               |               |                  |  |   |  |
| Permitted external capacitance         | C <sub>a</sub> = 95 nF   |               |               |                  |  |   |  |
| General data                           |                          |               |               |                  |  |   |  |
| LED indicators, power "On" (green)     |                          |               |               |                  |  |   |  |
| Isolation                              |                          |               |               |                  |  |   |  |
| Input – output/power supply/FSK        | 2.3 kV                   |               |               |                  |  |   |  |
| Max. ambient temperature               | -20...+60 °C             |               |               |                  |  |   |  |
| Weight                                 | 90 g                     |               |               |                  |  |   |  |
| Power supply                           |                          |               |               |                  |  |   |  |
| Rated voltage                          | 19.2...30 V DC           |               |               |                  |  |   |  |
| Power consumption                      | 1.05 W                   |               |               |                  |  |   |  |
| Performance under reference conditions |                          |               |               |                  |  |   |  |
| Linearity deviation                    | < 0.1 %                  |               |               |                  |  |   |  |
| Error limit                            | < 0.25 %                 |               |               |                  |  |   |  |
| Temperature effect                     | < 0.1 %/10 K             |               |               |                  |  |   |  |
| Impedance effect                       | < 0.05 %                 |               |               |                  |  |   |  |
| Response time                          | < 50 ms                  |               |               |                  |  |   |  |

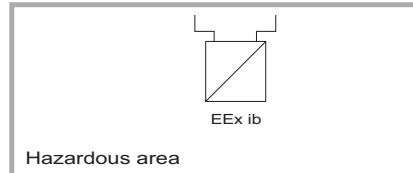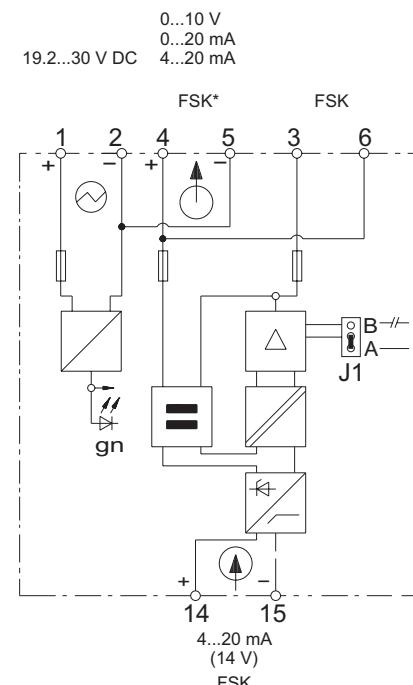

#### Functions of the plug-in jumpers J1:

J1      wire break monitoring  
A = without  
B = with

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

\* FSK only at load  $\geq 250 \Omega$  (4...20 mA)

## Isolating Power Supply Ex

1 channel, HART

V17151-62\_ 

| Ordering information                              |           | Catalog No. |
|---|-----------|-------------|
| <b>Isolating Power Supply Ex, 1 channel, HART</b> |           | V17151-62_  |
| Output  | 4...20 mA | 0           |
|   | 0...20 mA | 1           |
|   | 0...10 V  | 2           |


# Isolating Power Supply Ex

1 channel, HART, FSK bus

V17151-720





- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication
- Output signal free of HART signal

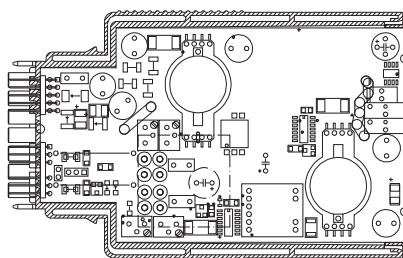

Module size 4

| <b>Output</b>                                 |                    |
|---|--------------------|
|   | ↑ (safe area)      |
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0..600 $\Omega$    |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
|   | ↑ (hazardous area) |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>Explosion protection</b>                   |                    |
|   | [EEx ia] IIC       |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |
| Max. short-circuit current                    | $I_o = 93$ mA      |
| Max. voltage                                  | $U_o = 26.3$ V     |
| Max. power                                    | $P_o = 610$ mW     |
| Permitted external inductance                 | $L_a = 4.1$ mH     |
| Permitted external capacitance                | $C_a = 97$ nF      |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 120 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 1.7 W              |
| Power dissipation                             | 1.4 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

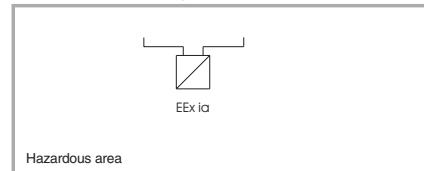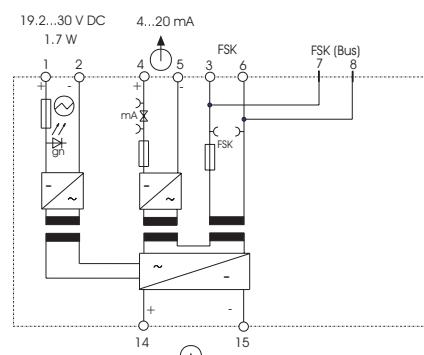

Hazardous area


# Isolating Power Supply Ex

1 channel, HART

V17151-725





- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication

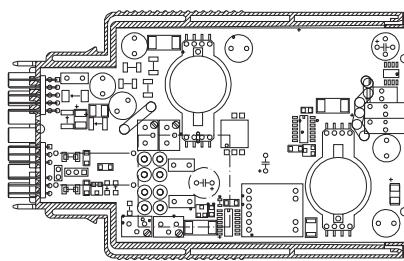

Module size 4

| <b>Output</b>                                 |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0...600 $\Omega$   |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via mA signal                                 |                    |
| via testjacks 2 x 2 mm (front)                |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>Explosion protection</b>                   |                    |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |
| Max. short-circuit current                    | $I_o = 93$ mA      |
| Max. voltage                                  | $U_o = 26.3$ V     |
| Max. power                                    | $P_o = 610$ mW     |
| Permitted external inductance                 | $L_a = 4.1$ mH     |
| Permitted external capacitance                | $C_a = 97$ nF      |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 120 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 1.7 W              |
| Power dissipation                             | 1.4 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

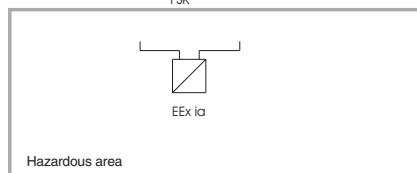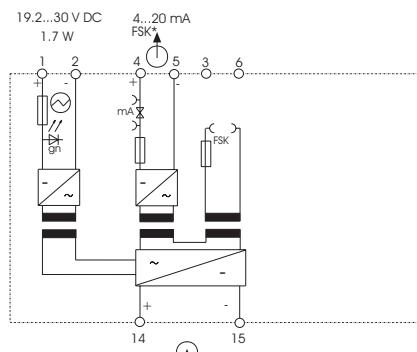


Hazardous area

\* FSK only at load  $\geq 250 \Omega$




- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

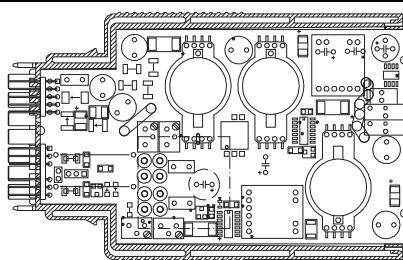

Module size 4

| <b>Output</b> per channel                     |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0..600 $\Omega$    |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b> per channel              |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b> per channel                      |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>Explosion protection</b>                   |                    |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |
| Max. short-circuit current                    | $I_o = 93$ mA      |
| Max. voltage                                  | $U_o = 26.3$ V     |
| Max. power                                    | $P_o = 610$ mW     |
| Permitted external inductance                 | $L_a = 4.1$ mH     |
| Permitted external capacitance                | $C_a = 97$ nF      |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b> per channel                  |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| <b>Isolation</b> channel 1 – channel 2        |                    |
| Input 1 – input 2                             | 500 V              |
| Output 1 – output 2                           | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 140 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 3.1 W              |
| Power dissipation                             | 2.45 W             |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

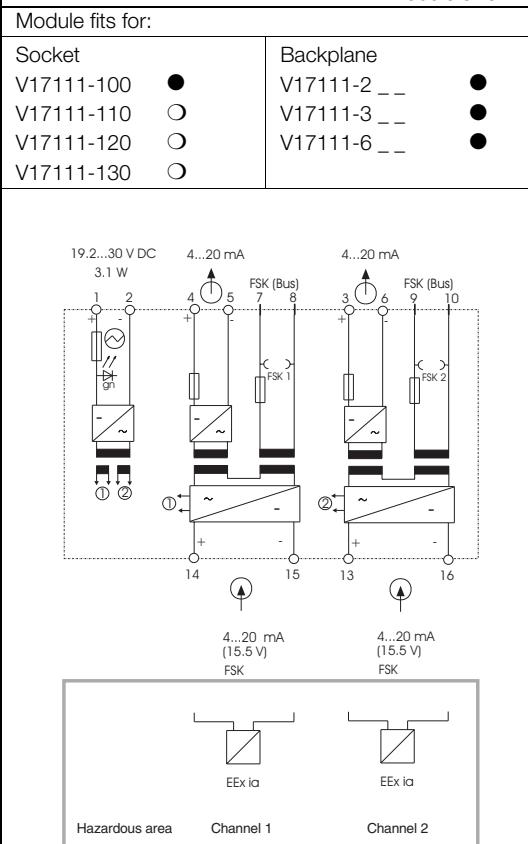


# Isolating Power Supply Ex

2 channels, HART

V17151-745




- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication

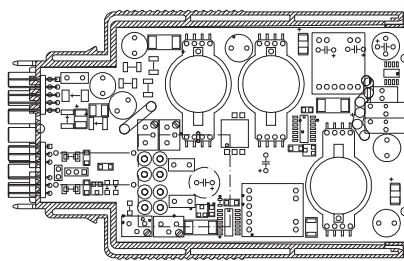

Module size 4

| <b>Output</b> per channel                     |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0...600 $\Omega$   |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b> per channel              |                    |
| via mA signal                                 |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b> per channel                      |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>Explosion protection</b>                   |                    |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |
| Max. short-circuit current                    | $I_o = 93$ mA      |
| Max. voltage                                  | $U_o = 26.3$ V     |
| Max. power                                    | $P_o = 610$ mW     |
| Permitted external inductance                 | $L_a = 4.1$ mH     |
| Permitted external capacitance                | $C_a = 97$ nF      |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b> per channel                  |                    |
| Input – output/power supply/FSK               | 2.3 kV             |
| Output – power supply – FSK                   | 500 V              |
| <b>Isolation</b> channel 1 – channel 2        |                    |
| Input 1 – input 2                             | 500 V              |
| Output 1 – output 2                           | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 140 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 3.1 W              |
| Power dissipation                             | 2.45 W             |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.1 %            |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

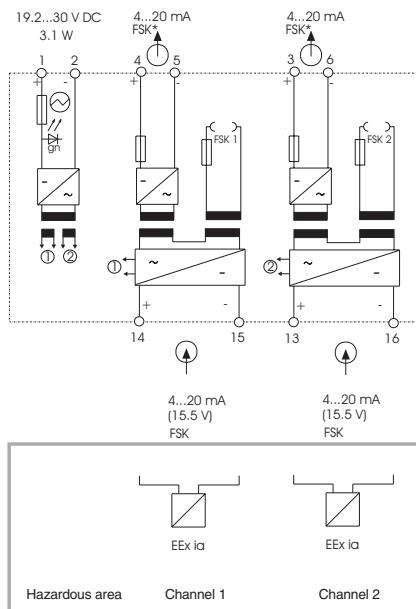

\* FSK only at load  $\geq 250 \Omega$


# Isolating Power Supply Ex

2 outputs, HART, FSK bus

V17151-750






- Power supply for loop powered HART transmitters
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

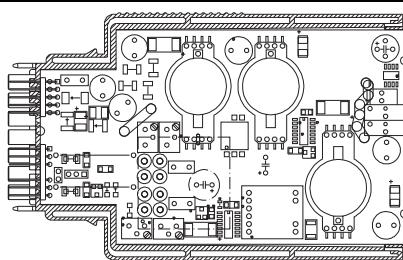

Module size 4

| <b>Output</b> output 1/output 2               |                    |
|---|--------------------|
| Output current (short-circuit proof)          | 4...20 mA          |
| Transformation ratio                          | 1:1                |
| Detect. of wire break (input)                 | < 0.1 mA           |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |
| Load  | 0...600 $\Omega$   |
| Residual ripple (peak-to-peak)                | < 0.25 %           |
| <b>Communication</b>                          |                    |
| via FSK bus (backplane/FSK bus amplifier)     |                    |
| via jacks 2 x 2 mm (front)                    |                    |
| Permeable protocol                            | HART               |
| Bandwidth                                     | 500 Hz...10 kHz    |
| <b>Input</b>                                  |                    |
| Input current                                 | 4...20 mA          |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |
| Short circuit current                         | 23...28 mA         |
| Residual ripple (peak-to-peak)                | < 100 mV           |
| <b>Explosion protection</b>                   |                    |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |
| Max. short-circuit current                    | $I_o = 93$ mA      |
| Max. voltage                                  | $U_o = 26.3$ V     |
| Max. power                                    | $P_o = 610$ mW     |
| Permitted external inductance                 | $L_a = 4.1$ mH     |
| Permitted external capacitance                | $C_a = 97$ nF      |
| <b>General data</b>                           |                    |
| LED indicators, power "On" (green)            |                    |
| <b>Isolation</b>                              |                    |
| Input – output 1/output 2/power supply/FSK    | 2.3 kV             |
| Output 1 – output 2 – power supply – FSK      | 500 V              |
| Max. ambient temperature                      | -20...+60 °C       |
| Weight  | 140 g              |
| <b>Power supply</b>                           |                    |
| Rated voltage                                 | 19.2...30 V DC     |
| Power consumption                             | 2.6 W              |
| Power dissipation                             | 2.3 W              |
| <b>Performance under reference conditions</b> |                    |
| Linearity deviation                           | < 0.1 %            |
| Error limit                                   | < 0.25 %           |
| Temperature effect                            | < 0.1 %/10 K       |
| Impedance effect                              | < 0.05 %           |
| Response time                                 | < 50 ms            |

| Module fits for: |   |
|------------------|---|
| Socket           |   |
| V17111-100       | ● |
| V17111-110       | ○ |
| V17111-120       | ○ |
| V17111-130       | ○ |
| Backplane        |   |
| V17111-2 _ _     | ● |
| V17111-3 _ _     | ● |
| V17111-6 _ _     | ● |

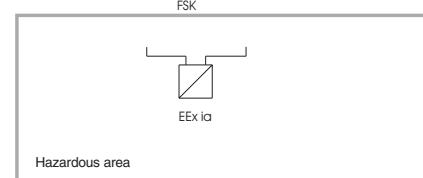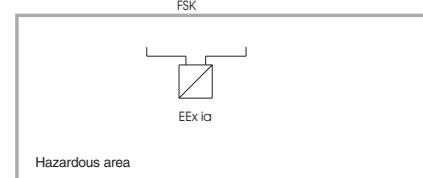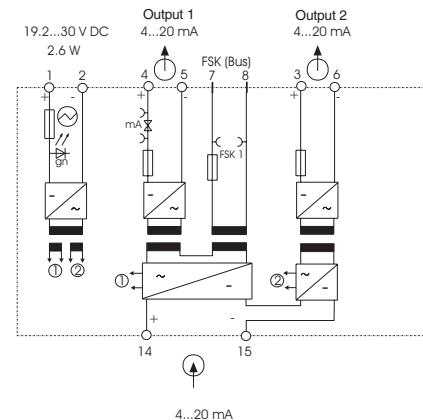

Hazardous area


# Isolating Power Supply Ex

2 outputs, HART

V17151-755





- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication

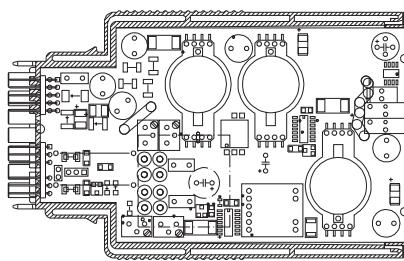

Module size 4

|   |                    |  |
|---|--------------------|--|
| <b>Output</b> output 1/output 2               |                    |  |
| Output current (short-circuit proof)          | 4...20 mA          |  |
| Transformation ratio                          | 1:1                |  |
| Detect. of wire break (input)                 | < 0.1 mA           |  |
| Detect. of short-circuit (input, approx.)     | 23...28 mA         |  |
| Load  | 0...600 $\Omega$   |  |
| Residual ripple (peak-to-peak)                | < 0.25 %           |  |
| <b>Communication</b>                          |                    |  |
| via mA signal                                 |                    |  |
| via jacks 2 x 2 mm (front)                    |                    |  |
| Permeable protocol                            | HART               |  |
| Bandwidth                                     | 500 Hz...10 kHz    |  |
| <b>Input</b>                                  |                    |  |
| Input current                                 | 4...20 mA          |  |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V |  |
| Short circuit current                         | 23...28 mA         |  |
| Residual ripple (peak-to-peak)                | < 100 mV           |  |
| <b>Explosion protection</b>                   |                    |  |
| Certificate of conformity                     | PTB 98 ATEX 2183 X |  |
| Max. short-circuit current                    | $I_o = 93$ mA      |  |
| Max. voltage                                  | $U_o = 26.3$ V     |  |
| Max. power                                    | $P_o = 610$ mW     |  |
| Permitted external inductance                 | $L_a = 4.1$ mH     |  |
| Permitted external capacitance                | $C_a = 97$ nF      |  |
| <b>General data</b>                           |                    |  |
| LED indicators, power "On" (green)            |                    |  |
| <b>Isolation</b>                              |                    |  |
| Input – output 1/output 2/power supply/FSK    | 2.3 kV             |  |
| Output 1 – output 2 – power supply – FSK      | 500 V              |  |
| Max. ambient temperature                      | -20...+60 °C       |  |
| Weight  | 140 g              |  |
| <b>Power supply</b>                           |                    |  |
| Rated voltage                                 | 19.2...30 V DC     |  |
| Power consumption                             | 2.6 W              |  |
| Power dissipation                             | 2.3 W              |  |
| <b>Performance under reference conditions</b> |                    |  |
| Linearity deviation                           | < 0.1 %            |  |
| Error limit                                   | < 0.25 %           |  |
| Temperature effect                            | < 0.1 %/10 K       |  |
| Impedance effect                              | < 0.05 %           |  |
| Response time                                 | < 50 ms            |  |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

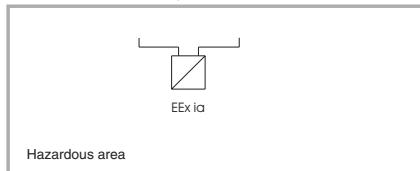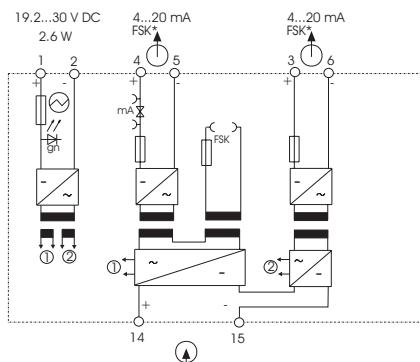

\* FSK only at load  $\geq 250 \Omega$


# Input Isolator Ex

1 channel, HART, FSK bus

V17151-820





- Input isolator for extra powered HART transmitters (Flowmeters)
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication
- Output signal free of HART signal

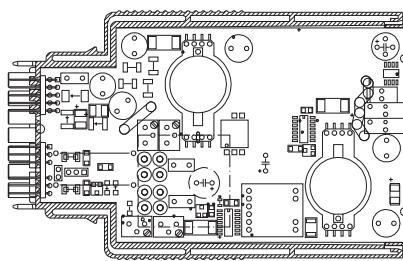

Module size 4


| Output                                    |                         |
|---|-------------------------|
| Output current (short-circuit proof)      | 4...20 mA               |
| Transformation ratio                      | 1:1                     |
| Detect. of wire break (input)             | < 0.1 mA                |
| Detect. of short circuit (input, approx.) | 23...28 mA              |
| Load                                      | 0...600 $\Omega$        |
| Residual ripple (peak-to-peak)            | < 0.25 %                |
| Communication                             |                         |
| via FSK bus (backplane/FSK bus amplifier) |                         |
| via jacks 2 x 2 mm (front)                |                         |
| Permeable protocol                        | HART                    |
| Bandwidth                                 | 500 Hz...10 kHz         |
| Input                                     |                         |
| Input current                             | 4...20 mA               |
| Voltage drop in input                     | < 2 V                   |
| Explosion protection                      |                         |
| Certificate of conformity                 | [EEx ia] IIC            |
| Max. short-circuit current                | $I_o = 30.5 \text{ mA}$ |
| Max. voltage                              | $U_o = 3.5 \text{ V}$   |
| Max. power                                | $P_o = 26.7 \text{ mW}$ |
| General data                              |                         |
| LED indicators, power "On" (green)        |                         |
| Isolation                                 |                         |
| Input – output/power supply/FSK           | 2.3 kV                  |
| Output – power supply – FSK               | 500 V                   |
| Max. ambient temperature                  | -20...+60 °C            |
| Weight                                    | 120 g                   |
| Power supply                              |                         |
| Rated voltage                             | 19.2...30 V DC          |
| Power consumption                         | 1.1 W                   |
| Power dissipation                         | 1.1 W                   |
| Performance under reference conditions    |                         |
| Linearity deviation                       | < 0.1 %                 |
| Error limit                               | < 0.25 %                |
| Temperature effect                        | < 0.1 %/10 K            |
| Impedance effect                          | < 0.05 %                |
| Response time                             | < 50 ms                 |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

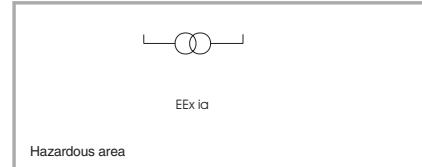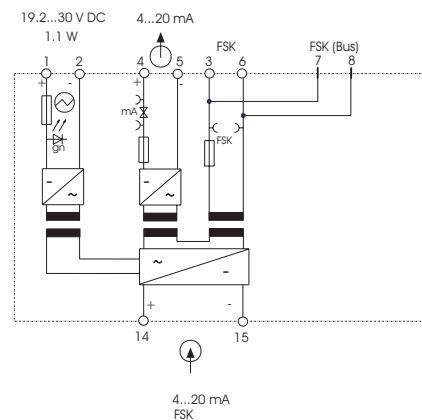





- Input isolator for extra powered HART transmitters (Flowmeters)**
- Electrical isolation between input/output/power supply and HART**
- Testjacks for mA signal**
- Jacks for HART communication**

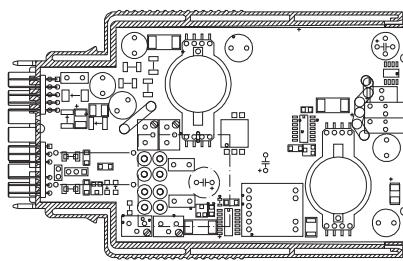

Module size 4

| <b>Output</b>                                 |                          |
|---|--------------------------|
| Output current (short-circuit proof)          | 4...20 mA                |
| Transformation ratio                          | 1:1                      |
| Detect. of wire break (input)                 | < 0.1 mA                 |
| Detect. of short-circuit (input, approx.)     | 23...28 mA               |
| Load  | 0...600 $\Omega$         |
| Residual ripple (peak-to-peak)                | < 0.25 %                 |
| <b>Communication</b>                          |                          |
| via mA signal                                 |                          |
| via jacks 2 x 2 mm (front)                    |                          |
| Permeable protocol                            | HART                     |
| Bandwidth                                     | 500 Hz...10 kHz          |
| <b>Input</b>                                  |                          |
| Input current                                 | 4...20 mA                |
| Short circuit current                         | 23...28 mA               |
| Residual ripple (peak-to-peak)                | < 100 mV                 |
| Voltage drop in input                         | < 2 V                    |
| <b>Explosion protection</b>                   |                          |
| Certificate of conformity                     | [EEx ia] IIC             |
| PTB 98 ATEX 2183 X                            |                          |
| Max. short-circuit current                    | I <sub>o</sub> = 30.5 mA |
| Max. voltage                                  | U <sub>o</sub> = 3.5 V   |
| Max. power                                    | P <sub>o</sub> = 26.7 mW |
| <b>General data</b>                           |                          |
| LED indicators, power "On" (green)            |                          |
| <b>Isolation</b>                              |                          |
| Input – output/power supply/FSK               | 2.3 kV                   |
| Output – power supply – FSK                   | 500 V                    |
| Max. ambient temperature                      | -20...+60 °C             |
| Weight  | 120 g                    |
| <b>Power supply</b>                           |                          |
| Rated voltage                                 | 19.2...30 V DC           |
| Power consumption                             | 1.1 W                    |
| Power dissipation                             | 1.1 W                    |
| <b>Performance under reference conditions</b> |                          |
| Linearity deviation                           | < 0.1 %                  |
| Error limit                                   | < 0.25 %                 |
| Temperature effect                            | < 0.1 %/10 K             |
| Impedance effect                              | < 0.05 %                 |
| Response time                                 | < 50 ms                  |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

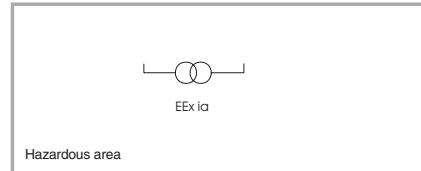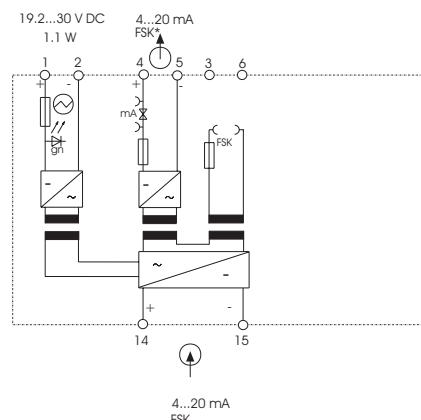\* FSK only at load  $\geq 250 \Omega$


# Input Isolator Ex

2 channels, HART, FSK bus

V17151-840





- Input isolator for extra powered HART transmitters (Flowmeters)**
- FSK bus communication via backplanes and FSK bus amplifier**
- Electrical isolation between input/output/power supply and HART**
- Jacks for HART communication**
- Output signal free of HART signal**

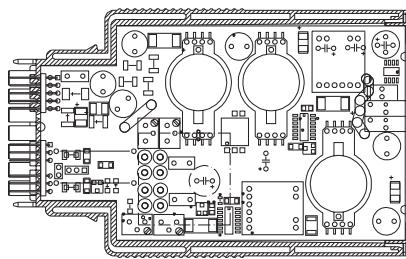

Module size 4


| <b>Output</b> per channel                     |                          |
|---|--------------------------|
| Output current (short-circuit proof)          | 4...20 mA                |
| Transformation ratio                          | 1:1                      |
| Detect. of wire break (input)                 | < 0.1 mA                 |
| Detect. of short-circuit (input, approx.)     | 23...28 mA               |
| Load  | 0..600 $\Omega$          |
| Residual ripple (peak-to-peak)                | < 0.25 %                 |
| <b>Communication</b> per channel              |                          |
| via FSK bus (backplane/FSK bus amplifier)     |                          |
| via jacks 2 x 2 mm (front)                    |                          |
| Permeable protocol                            | HART                     |
| Bandwidth                                     | 500 Hz...10 kHz          |
| <b>Input</b> per channel                      |                          |
| Input current                                 | 4...20 mA                |
| Short circuit current                         | 23...28 mA               |
| Residual ripple (peak-to-peak)                | < 100 mV                 |
| Voltage drop in input                         | < 2 V                    |
| <b>Explosion protection</b>                   |                          |
| Certificate of conformity                     | [EEx ia] IIC             |
| PTB 98 ATEX 2183 X                            |                          |
| Max. short-circuit current                    | I <sub>o</sub> = 30.5 mA |
| Max. voltage                                  | U <sub>o</sub> = 3.5 V   |
| Max. power                                    | P <sub>o</sub> = 26.7 mW |
| <b>General data</b>                           |                          |
| LED indicators, power "On" (green)            |                          |
| <b>Isolation</b> per channel                  |                          |
| Input – output/power supply/FSK               | 2.3 kV                   |
| Output – power supply – FSK                   | 500 V                    |
| <b>Isolation</b> channel 1 – channel 2        |                          |
| Input 1 – input 2                             | 500 V                    |
| Output 1 – output 2                           | 500 V                    |
| Max. ambient temperature                      | -20...+60 °C             |
| Weight  | 140 g                    |
| <b>Power supply</b>                           |                          |
| Rated voltage                                 | 19.2...30 V DC           |
| Power consumption                             | 1.9 W                    |
| Power dissipation                             | 1.9 W                    |
| <b>Performance under reference conditions</b> |                          |
| Linearity deviation                           | < 0.1 %                  |
| Error limit                                   | < 0.25 %                 |
| Temperature effect                            | < 0.1 %/10 K             |
| Impedance effect                              | < 0.05 %                 |
| Response time                                 | < 50 ms                  |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

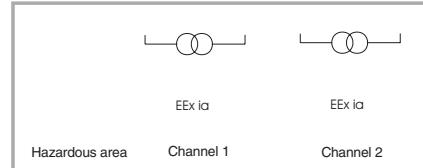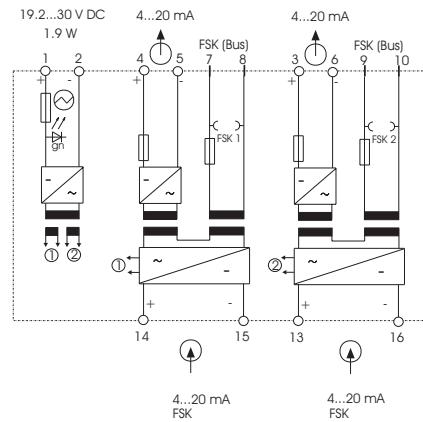





- Input isolator for extra powered HART transmitters (Flowmeters)**
- Electrical isolation between input/output/power supply and HART**
- Jacks for HART communication**

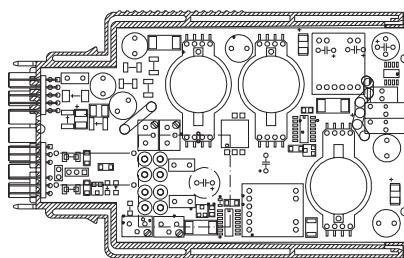

Module size 4

| <b>Output</b> per channel                     |                          |
|---|--------------------------|
| Output current (short-circuit proof)          | 4...20 mA                |
| Transformation ratio                          | 1:1                      |
| Detect. of wire break (input)                 | < 0.1 mA                 |
| Detect. of short-circuit (input, approx.)     | 23...28 mA               |
| Load  | 0...600 $\Omega$         |
| Residual ripple (peak-to-peak)                | < 0.25 %                 |
| <b>Communication</b> per channel              |                          |
| via mA signal                                 |                          |
| via jacks 2 x 2 mm (front)                    |                          |
| Permeable protocol                            | HART                     |
| Bandwidth                                     | 500 Hz...10 kHz          |
| <b>Input per channel</b>                      |                          |
| Input current                                 | 4...20 mA                |
| Short circuit current                         | 23...28 mA               |
| Residual ripple (peak-to-peak)                | < 100 mV                 |
| Voltage drop in input                         | < 2 V                    |
| <b>Explosion protection</b>                   |                          |
| Certificate of conformity                     | [EEx ia] IIC             |
| PTB 98 ATEX 2183 X                            |                          |
| Max. short-circuit current                    | I <sub>o</sub> = 30.5 mA |
| Max. voltage                                  | U <sub>o</sub> = 3.5 V   |
| Max. power                                    | P <sub>o</sub> = 26.7 mW |
| <b>General data</b>                           |                          |
| LED indicators, power "On" (green)            |                          |
| <b>Isolation</b> per channel                  |                          |
| Input – output/power supply/FSK               | 2.3 kV                   |
| Output – power supply – FSK                   | 500 V                    |
| <b>Isolation</b> channel 1 – channel 2        |                          |
| Input 1 – input 2                             | 500 V                    |
| Output 1 – output 2                           | 500 V                    |
| Max. ambient temperature                      | -20...+60 °C             |
| Weight  | 140 g                    |
| <b>Power supply</b>                           |                          |
| Rated voltage                                 | 19.2...30 V DC           |
| Power consumption                             | 1.9 W                    |
| Power dissipation                             | 1.9 W                    |
| <b>Performance under reference conditions</b> |                          |
| Linearity deviation                           | < 0.1 %                  |
| Error limit                                   | < 0.25 %                 |
| Temperature effect                            | < 0.1 %/10 K             |
| Impedance effect                              | < 0.05 %                 |
| Response time                                 | < 50 ms                  |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

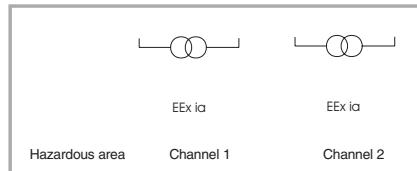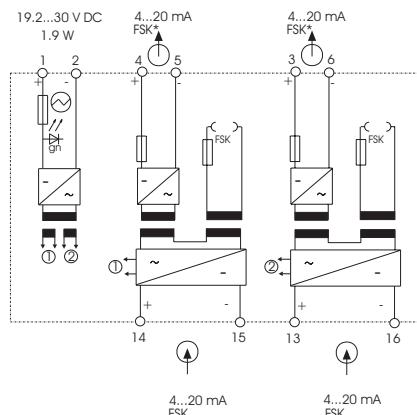
\* FSK only at load  $\geq 250 \Omega$

### Transmitter

|                            |                             |            |
|----------------------------|-----------------------------|------------|
| Intelligent Transmitter    | 1 channel, LCI . . . . .    | V17152-31_ |
| Temperature Transmitter Ex | 1 channel, Pt 100 . . . . . | V17152-61_ |
| Intelligent Transmitter Ex | 1 channel, LCI . . . . .    | V17152-62_ |

## Analog Modules

| Selection table  |                               | Transmitters                        |                |                |                |                |                |                |                |                |                |                |                |
|--|-------------------------------|-------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|  |                               | digital                             |                |                |                | analog, Ex     |                |                |                | digital, Ex    |                |                |                |
|  |                               | V17152-310                          | V17152-312     | V17152-313     | V17152-314     | V17152-611     | V17152-612     | V17152-613     | V17152-614     | V17152-619     | V17152-620     | V17152-622     | V17152-623     |
| Control room   | Output                        |                                     |                |                |                |                |                |                |                |                |                |                |                |
|  | Analog signal                 | 0...20 mA                           | x              |                |                |                |                |                |                | x              | x              |                |                |
|  |                               | 4...20 mA                           | x              |                |                | x              | x              | x              | x              | x              | x              |                |                |
|  |                               | 0...5 mA                            |                | x              |                |                |                |                |                |                |                | x              |                |
|  |                               | 0(2)...10 V                         |                | x              |                |                |                |                | x              |                | x              |                |                |
|  | Monitoring                    | 0(1)...5 V                          |                |                | x              |                |                |                |                |                |                | x              |                |
|  |                               | under- and overrange                | x              |                |                |                |                |                |                |                | x              |                |                |
|  |                               | Default value                       | x              | x              | x              | x              |                |                |                | x              | x              | x              | x              |
|  | Binary                        | Relay                               | x              | x              | x              | x              |                |                |                | x              | x              | x              | x              |
| Field  | Input                         |                                     |                |                |                |                |                |                |                |                |                |                |                |
|  | Sensor / actor                | Resistance thermometer, 2-wire      | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | Resistance thermometer, 3-wire      | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | Resistance thermometer, 4-wire      | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | Thermocouple                        | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | 0...500 Ohm                         | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | 0...5000 Ohm                        | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | ± 125 mV                            | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  | Linearization                 | -125 mV...1250 mV                   | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | Pt100                               | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | Ni100                               | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | TC Typ B, E, J, K, L, N, R, S, T, U | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  | Type of measuring             | Customer spezific                   | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | Single                              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | Differential, average               | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  | Explosion protection          | [EEx ia] IIC / [EEx ib] IIC         |                |                |                | x/x            |
|  | Monitoring                    | Wire break                          | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  |                               | Short circuit                       | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
| General data   | Power supply                  | 19.2...30 V DC                      | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | 95...253 V AC                       | o <sup>1</sup> |
|  | Electrical galvanic isolation | Input-output / power supply         | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  |                               | Output - power supply               | o <sup>2</sup> |
|  | Programmable                  | via PC-software                     | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  | Measurement range             | fixed range                         |                |                |                | x              | x              | x              | x              | x              |                |                |                |
|  |                               | via PC-software                     | x              | x              | x              | x              |                |                |                |                | x              | x              | x              |
|  | <b>Modules fits for:</b>      |                                     |                |                |                |                |                |                |                |                |                |                |                |
|  | V17111-100, Socket            |                                     | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
|  | V17111-110, Socket            |                                     | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              | x              |
| x = ok; o <sup>1</sup> = only with V17111-130; o <sup>2</sup> = only with V17111-12_, -13_ |                               |                                     |                |                |                |                |                |                |                |                |                |                |                |
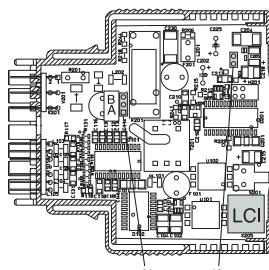
|  |   |                                    |  |
|--|---|------------------------------------|--|
| <ul style="list-style-type: none"> <li><b>Programmable temperature transmitter for resistance thermometer (RTD) and thermocouples</b></li> <li><b>Definition of parameters via LCI interface (does not require an additional power supply)</b></li> <li><b>Relay output for alarm</b></li> <li><b>Monitoring of short-circuit, wire break and internal failure</b></li> <li><b>Output at failure under- and overrange, custom current level</b></li> </ul> |  <p>Module size 2</p>   |                                    |  |
| <b>Output</b>  | Module fits for:  |                                    |  |
| Type   | full modulation span load   | Socket                             | Backplane  |
| V17152-310   | 0/4...20 mA (0/3.8...20.5 mA) 0..600 Ω  | V17111-100 ●                       | V17111-2 _ _ ●   |
| V17152-312   | 0/2...10 V (0/1.9...10.25 V) > 100 kΩ   | V17111-110 ●                       | V17111-3 _ _ ●   |
| V17152-313   | 0...5 mA (0...5.13 mA) 0...2.4 kΩ   | V17111-120 ●                       | V17111-6 _ _ ●   |
| V17152-314   | 0/1...5 V (0/0.95...5.13 V) > 50 kΩ   | V17111-130 ●                       |  |
| Output at failure  | under- and overranging, custom current level  |                                    |  |
| Residual ripple (peak-to-peak)   | < 0.25 %  |                                    |  |
| Damping  | 0...30 s  |                                    |  |
| <b>Binary output (relay)</b>   |   |                                    |  |
| Trigger condition  | alarm set-point, wire break, short-circuit, device failure (adjustment via software)  |                                    |  |
| <b>Relay contact</b>   | 1 x NO/NC (adj. via jumper J1)  |                                    |  |
| Contact rating: 250 V AC; 1 A; cosφ > 0.7; 560 VA; 30 V DC; 2 A; 60 W  |   |                                    |  |
| Parameter setting  | via software or set by manufacturer   |                                    |  |
| Acc. for parameter setting   | PC with software  |                                    |  |
|  | LCI adapter (connection to PC)  |                                    |  |
| <b>Input</b>   |   |                                    |  |
| Sensors  | Resistance thermometers (2-, 3-, 4-wire circuit)<br>Thermocouples with/without reference junction<br>Resistance teletransmitters, Ω, mV inputs  |                                    |  |
| Measuring methods  | Single, differential, average   |                                    |  |
| Measuring ranges   | full modulation span min. measuring span<br>-200...+850 °C (Pt 100) 20 K<br>-200...+850 °C (Pt 100 diff.) 40 K<br>0...500 Ω; 0...5 kΩ 5 Ω; 50 Ω<br>±125 mV; -125...+1250 mV 2 mV; 20 mV |                                    |  |
| Linearization acc. to DIN IEC  | RTD - Pt 100, Pt 1000, Ni 100;<br>TC - B, E, J, K, L, N, R, S, T, U<br>Customer specific (max. 60 tiepoints)  |                                    |  |
| <b>General data</b>  |   |                                    |  |
| LED indicator: Power "On" (green); "Failure" / "Switching State Relay" (red)   |   |                                    |  |
| <b>Isolation</b>   |   |                                    |  |
| Input – output/power supply  | 2.3 kV  | J1                                 | Relay output<br>A = NO contact; B = NC contact   |
| Max. ambient temperature   | -20...+60 °C  | J2                                 | Parameter setting interlock<br>closed = active<br>open (parked) = inactive                                     |
| Weight   | 90 g  |                                    | The positions illustrated on the circuit diagram represented standard adjustments (delivery status)            |
| <b>Power supply</b>  | ~   | VG                                 | Reference junction Catalog No. 0317093   |
| Rated voltage  | 19.2...30 V DC  | LCI                                | Local Communication Interface  |
| Power consumption  | approx. 1.0 W   | 1)                                 | Resistance thermometers, Ω sensor in 4-wire circuit  |
| <b>Characteristics under reference conditions</b>  |   | 2)                                 | Resistance thermometers, Ω sensor in 3-wire circuit  |
| Linearity deviation  | < 0.1 %   | 3)                                 | Resistance thermometers, Ω sensor in diff./average   |
| Error limit  | < 0.2 K / < 0.2 % / < 80 mΩ (0...500 Ω)   | 4)                                 | Resistance thermometers, Ω sensor in 2-wire circuit  |
|  | < 0.2 K / < 0.2 % / < 0.8 Ω (0...5 kΩ)  | 5)                                 | Thermocouple with internal reference junction<br>(without reference junction short-circuit to terminals 11/12) |
|  | < 0.2 K / < 0.2 % / < 10 μV (-125...+125 mV)  | 6)                                 | Thermocouple, mV sensor in difference/average<br>7) mV sensor  |
|  | < 100 μV / < 0.2 % / (-125...+1250 V)   |                                    |  |
|  | Additional error through reference junction: 0.5 K  |                                    |  |
| Temperature effect   | < 0.1 % / 10 K (at < -5 °C 0.25 % / 10 K)   | <b>Standard parameter setting:</b> | (delivery status, if no customer specifications)   |
| Impedance effect   | < 0.05 %  |                                    | Sensor: Pt 100, 3-wire circuit   |
| Response time  | < 250 ms (TC), < 500 ms (RTD)   |                                    | Measuring method: single   |
|  |   |                                    | Measuring range: 0...100 °C  |
|  |   |                                    | Output: acc. to type 4...20 mA, 0...5 mA, 0...10 V, 0...5 V  |
|  |   |                                    | Output at failure: overranging   |
|  |   |                                    | Binary output: sensor error  |

**Intelligent Transmitter****V17152-31\_**

1 channel, LCI

| <b>Ordering information</b>  |             | Catalog No.   |
|--|-------------|---------------|
| <b>Intelligent Transmitter, 1 channel, LCI</b>   |             | V17152-31_    |
| Output   | 0/4...20 mA | 0             |
|  | 0/2...10 V  | 2             |
|  | 0...5 mA    | 3             |
|  | 0/1...5 V   | 4             |
| <b>Accessories</b>   |             |               |
| External reference junction (Pt 100)   |             | 0317093       |
| Socket with 24/24 power supply and integrated reference junction   |             | V17111-121    |
| Socket with 230/24 power supply and integrated reference junction  |             | V17111-131    |
| LCI adapter  |             | 0317135       |
| Device Management Tool Sv401 (SMART VISION)  |             | 63111-9820026 |
| <b>Notes:</b>  |             |               |
| The external reference junction is not included and has to be ordered separately. The termination of the reference junction according to the connection diagram. |             |               |



# Temperature Transmitter Ex

Pt 100, 1 channel

V17152-61\_



- Connection of resistance thermometer Pt 100
- Input [EEx ia] IIC
- Line break monitoring, rise or drop

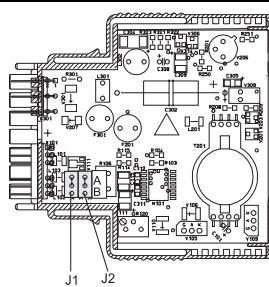

Module size 2

| <b>Output</b>                  |   |
|--------------------------------|---|
| Connection                     | Terminals 4(+); 5(-)  |
| Output current                 | 4...20 mA, temperature linear<br>(optional 0...20 mA, 0...10 V) |
| Wire break at input            | > 22 mA < 3.6 mA (rise/drop)                                    |
| Load                           | 0...600 Ω   |
| Residual ripple (peak-to-peak) | < 0.25 % (without parasitic voltage at input)                   |

| <b>Input</b>                   |   |
|--------------------------------|---|
| Connection                     | Terminals 12, 13, 14, 15<br>for resistance thermometer Pt 100     |
| Input circuit                  | 2-, 3-wire circuit  |
| Line resistance                | 0 Ω for 2-wire circuit<br>(10 Ω for ext. line balancing optional) |
| Measurement start              | -100 °C   |
| Max. measuring range           | -100...+850 °C  |
| Min. measuring span            | 60 °C   |
| <b>Explosion protection</b>    | [EEx ia] IIC  |
| Certificate of conformity      | PTB No. Ex-97.D.2030 X  |
| Max. short-circuit current     | I <sub>o</sub> = 19 mA  |
| Max. voltage                   | U <sub>o</sub> = 20 V   |
| Max. capacity                  | P <sub>o</sub> = 95 mW  |
| Permitted external inductance  | L <sub>a</sub> = 75 mH  |
| Permitted external capacitance | C <sub>a</sub> = 140 nF   |



## General data

|   |  |
|---|--|
| Display   | green LED – power “On”                                       |
| Test voltage                                      | 2.3 kV input – output/power supply                           |
| Max. ambient temperature                          | -20...+60 °C   |
| Weight  | 90 g   |
| <b>Power supply</b>                               |  |
| Connection  | Terminals 1(+); 2(-)   |
| Rated voltage                                     | 19.2...30 V DC   |
| Power consumption                                 | approx. 1.0 W  |
| <b>Characteristics under reference conditions</b> |  |
| Linearity deviation                               | < 0.1 %  |
| Measurement deviation                             | < 0.5 %  |
| Temperature effect                                | < 0.1 %/10 K for -5...+60 °C<br>< 0.2 %/10 K for -20...-5 °C |
| Load effect                                       | < 0.05 % in load range 0...600 Ω                             |
| Response time                                     | < 350 ms   |

Module fits for:

| Socket     | Backplane      |
|------------|----------------|
| V17111-100 | ● V17111-2 _ _ |
| V17111-110 | ● V17111-3 _ _ |
| V17111-120 | ● V17111-6 _ _ |
| V17111-130 | ●              |

19.2...30 VDC 4...20mA

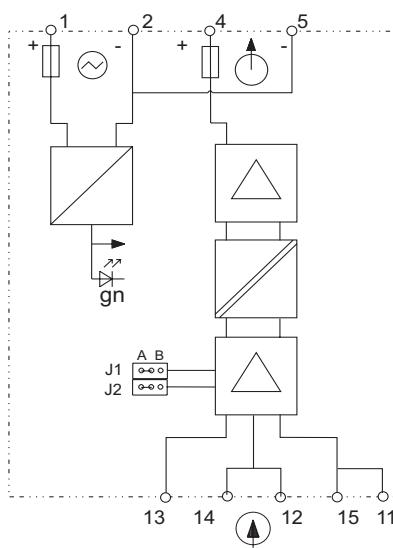

Inputs [EEx ia] IIC

Hazardous area

Functions of the plug-in jumpers J1:

J1/J2 Wire break monitoring  
A = output signal, rise  
B = output signal, drop

The positions illustrated on the circuit diagram represented standard adjustments (delivery status)

## Temperature Transmitter Ex

Pt 100, 1 channel

V17152-61\_




| Ordering information                                 | Catalog No. |
|--|-------------|
| <b>Temperature Transmitter Ex, Pt 100, 1 channel</b> | V17152-61_  |
| Meas. range 0... 60 °C, 3-wire, 4...20 mA            | 1           |
| 0...100 °C, 3-wire, 4...20 mA                        | 2           |
| 0...150 °C, 3-wire, 4...20 mA                        | 3           |
| 0...200 °C, 3-wire, 4...20 mA                        | 4           |
| ..... <sup>1)</sup>                                  | 9           |


<sup>1)</sup> Example: 100...200 °C/2-wire/0...20 mA



|   |  |
|---|--|
| <ul style="list-style-type: none"> <li><b>Programmable temperature transmitter for resistance thermometer (RTD) and thermocouples</b></li> <li><b>Definition of parameters via LCI interface (does not require an additional power supply)</b></li> <li><b>Relay output for alarm</b></li> <li><b>Monitoring of short-circuit, wire break and internal failure</b></li> </ul> |  |
| <b>Output</b>   | ↑  |
| Type  | full modulation span load  |
| V17152-620  | 0/4...20 mA (0/3.8...20.5 mA) 0..600 Ω   |
| V17152-622  | 0/2...10 V (0/1.9...10.25 V) > 100 kΩ  |
| V17152-623  | 0...5 mA (0...5.13 mA) 0..2,4 kΩ   |
| V17152-624  | 0/1...5 V (0/0.95...5.13 V) > 50 kΩ  |
| Output at failure   | under- and overranging, custom current level   |
| Residual ripple (peak-to-peak)  | < 0.25 %   |
| Damping   | 0...30 s   |
| <b>Binary output (relay)</b>  |  |
| Trigger condition: alarm set-point, wire break, short-circuit, device failure   |  |
| Relay contact   | 1 x NO/NC (adjustment via jumper J1)   |
| Contact rating: 250 V AC; 1 A; cosφ > 0.7; 560 VA; 30 V DC; 2 A; 60 W   |  |
| <b>Input</b>  | ⊕  |
| Sensors   | Resistance thermometers (2-, 3-, 4-wire circuit)<br>Thermocouples with/without reference junction<br>Resistance teletransmitters, Ω, mV inputs |
| Measuring methods   | Single, differential, average  |
| Measuring ranges  | full modulation span min. meas. span   |
| -200...+850 °C (Pt 100)   | 20 K   |
| -200...+850 °C (Pt 100 diff.)   | 40 K   |
| 0...500 Ω; 0...5 kΩ   | 5 Ω; 50 Ω  |
| ±125 mV; -125...+1250 mV  | 2 mV; 20 mV  |
| Linearization acc. to DIN IEC   | RTD - Pt 100, Pt 1000, Ni 100;<br>TC - B, E, J, K, L, N, R, S, T, U<br>Customer specific (max. 60 tiepoints)                                   |
| <b>Explosion protection</b>   | [EEx ia] IIC   |
| Certificate of conformity   | PTB 99 ATEX 2013 X   |
| Max. short-circuit current  | I <sub>o</sub> = 2 mA  |
| Max. voltage  | U <sub>o</sub> = 5.4 V   |
| Max. power  | P <sub>o</sub> = 2 mW  |
| Permitted external inductance   | L <sub>a</sub> = 5 mH  |
| Permitted external capacitance  | C <sub>a</sub> = 1650 nF   |
| <b>General data</b>   |  |
| LED indicator: power "On" (green)/"Failure"/"Switching State Relay" (red)   |  |
| <b>Isolation</b>  |  |
| Input – output/power supply   | 2.3 kV   |
| Max. ambient temperature  | -20...+60 °C   |
| Weight  | 90 g   |
| <b>Power supply</b>   | ⊕  |
| Rated voltage   | 19.2...30 V DC   |
| Power consumption   | approx. 1.0 W  |
| <b>Characteristics under reference conditions</b>   |  |
| Linearity deviation   | < 0.1 %  |
| Error limit   | < 0.2 K/< 0.2 % / < 80 mΩ (0...500 Ω)  |
| (additional error through reference junction: 0.5 K)  | < 0.2 K/< 0.2 % / < 0.8 Ω (0...5 kΩ)   |
|   | < 0.2 K/< 0.2 % / < 10 μV (-125...+125 mV)   |
|   | < 100 μV/<0.2 % / (-125...+1250 V)   |
| Temperature effect  | < 0.1 %/10 K (at < -5 °C 0.25 %/10 K)  |
| Impedance effect  | < 0.05 %   |
| Response time   | < 250 ms (TC), < 500 ms (RTD)  |

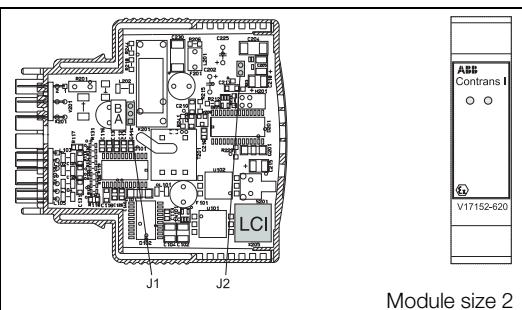

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

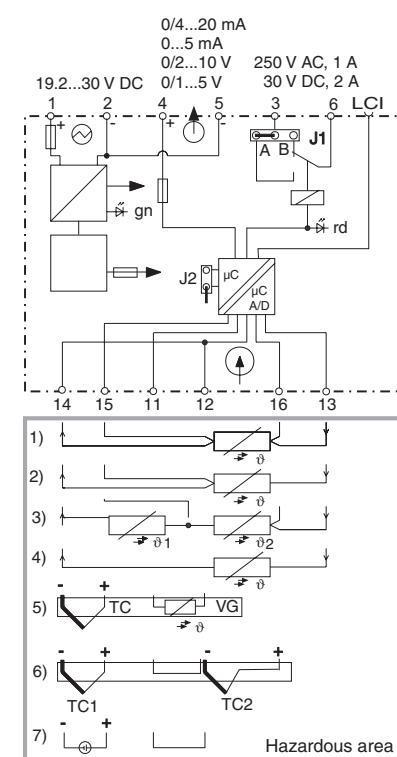**Functions of the plug-in jumpers J.:**

- J1** Relay output  
A = NO contact; B = NC contact  
**J2** Parameter setting interlock  
closed = active  
open (parked) = inactive

The positions illustrated on the circuit diagram represented standard adjustments (delivery status)

- VG Reference junction Catalog No. 0317093  
LCI Local Communication Interface  
1) Resistance thermometers, Ω sensor in 4-wire circuit  
2) Resistance thermometers, Ω sensor in 3-wire circuit  
3) Resistance thermometers, Ω sensor in diff./average  
4) Resistance thermometers, Ω sensor in 2-wire circuit  
5) Thermocouple with internal reference junction  
(without reference junction short-circuit to terminals 11/12)  
6) Thermocouple, mV sensor in difference/average  
7) mV sensor

**Standard parameter setting:**

- (delivery status, if no customer specifications)  
Sensor: Pt 100, 3-wire circuit  
Measuring method: single  
Measuring range: 0...100 °C  
Output: acc. to type 4...20 mA, 0...5 mA, 0...10 V, 0...5 V  
Output at failure: overranging  
Binary output: sensor error



| <b>Ordering information</b>  |             | Catalog No.   |
|--|-------------|---------------|
| <b>Intelligent Transmitter Ex, 1 channel, LCI</b>  |             | V17152-62_    |
| Output   | 0/4...20 mA | 0             |
|  | 0/2...10 V  | 2             |
|  | 0...5 mA    | 3             |
|  | 0/1...5 V   | 4             |
| <b>Accessories</b>   |             |               |
| External reference junction (Pt 100)   |             | 0317093       |
| Socket with 24/24 power supply and integrated reference junction   |             | V17111-121    |
| Socket with 230/24 power supply and integrated reference junction  |             | V17111-131    |
| LCI adapter  |             | 0317135       |
| Device Management Tool Sv401 (SMART VISION)  |             | 63111-9820026 |
| <b>Note:</b>   |             |               |
| The external reference junction is not included and has to be ordered separately. The termination of the reference junction according to the connection diagram. |             |               |




### **Output Isolators**

|                          |                                 |            |
|--------------------------|---------------------------------|------------|
| Loop Powered Isolator    | 1 channel .....                 | V17153-110 |
| Loop Powered Isolator    | 1 channel, bypass .....         | V17153-115 |
| Loop Powered Isolator    | 2 channels .....                | V17153-130 |
| Isolating Driver         | 1 channel .....                 | V17153-210 |
| Isolating Driver         | 1 channel, HART .....           | V17153-220 |
| Isolating Driver         | 1 channel, HART, FSK bus .....  | V17153-420 |
| Isolating Driver         | 2 channels, HART, FSK bus ..... | V17153-440 |
| Loop Powered Isolator Ex | 1 channel .....                 | V17153-510 |
| Loop Powered Isolator Ex | 1 channel, bypass .....         | V17153-515 |
| Loop Powered Isolator Ex | 1 channel, HART .....           | V17153-520 |
| Isolating Driver Ex      | 1 channel .....                 | V17153-610 |
| Isolating Driver Ex      | 1 channel, HART .....           | V17153-620 |
| Isolating Driver Ex      | 1 channel, HART, FSK bus .....  | V17153-820 |
| Isolating Driver Ex      | 1 channel, HART .....           | V17153-825 |
| Isolating Driver Ex      | 2 channels, HART, FSK bus ..... | V17153-840 |
| Isolating Driver Ex      | 2 channels, HART .....          | V17153-845 |

## Analog Modules

| Selection table |   |                                 | Loop powered isolator |            |            | Isolating driver |                |            | Loop powered isolator Ex |            |            | Isolating driver Ex |                |                |            |            |            |
|-----------------|---|---------------------------------|-----------------------|------------|------------|------------------|----------------|------------|--------------------------|------------|------------|---------------------|----------------|----------------|------------|------------|------------|
|                 |   |                                 | V17153-110            | V17153-115 | V17153-130 | V17153-210       | V17153-220     | V17153-420 | V17153-440               | V17153-510 | V17153-515 | V17153-520          | V17153-610     | V17153-620     | V17153-820 | V17153-825 | V17153-840 |
| Control room    | <b>Input</b>                                |                                 |                       |            |            |                  |                |            |                          |            |            |                     |                |                |            |            |            |
|                 | Analog signal                               | 0...20 mA                       | x                     | x          | x          |                  |                |            |                          | x          | x          | x                   |                |                |            |            |            |
|                 |   | 4...20 mA                       | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 | Output signal with FSK signal               |                                 |                       |            |            | x                | x              | x          |                          |            | x          | x                   | x              | x              | x          | x          | x          |
|                 | Output signal free of FSK signal            |                                 |                       |            |            |                  |                |            |                          |            |            |                     |                |                |            |            |            |
|                 | Multichannel                                | Channels                        |                       |            |            | 2                |                |            |                          | 2          |            |                     |                |                |            | 2          | 2          |
|                 | Bypass                                      |                                 |                       | x          |            |                  |                |            |                          | x          |            |                     |                |                |            |            |            |
| Field           | <b>Output</b>                               |                                 |                       |            |            |                  |                |            |                          |            |            |                     |                |                |            |            |            |
|                 | Sensor / actor                              | 0...20 mA                       | x                     | x          | x          |                  |                |            |                          | x          | x          |                     |                |                |            |            |            |
|                 |   | 4...20 mA                       | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 |   | FSK (HART)                      |                       |            |            | x                | x              | x          |                          |            | x          |                     | x              | x              | x          | x          | x          |
|                 | Explosion protection                        | [IEEEx ia] IIC / [IEEEx ib] IIC |                       |            |            |                  |                |            |                          | -/x        | -/x        | -/x                 | x/x            | x/x            | x/x        | x/x        | x/x        |
| General data    | Power supply                                | 19,2...30 V DC                  |                       |            |            | x                | x              | x          | x                        |            |            |                     | x              | x              | x          | x          | x          |
|                 |   | 95...253 V AC                   |                       |            |            | o <sup>1</sup>   | o <sup>1</sup> |            |                          |            |            |                     | o <sup>1</sup> | o <sup>1</sup> |            |            |            |
|                 | Electrical galvanic isolation               | Output - input / power supply   | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 |   | Input - power supply            |                       |            |            | o <sup>2</sup>   | o <sup>2</sup> | x          | x                        |            |            |                     | o <sup>2</sup> | o <sup>2</sup> | x          | x          | x          |
|                 |   | Input (4...20 mA) - FSK         |                       |            |            |                  | x              | x          |                          |            |            |                     | x              | x              | x          | x          | x          |
|                 |   | Channel 1 - channel 2           |                       | x          |            |                  |                |            |                          |            |            |                     |                |                |            | x          |            |
|                 | Communication                               | Point to point (FSK - HART)     |                       |            |            |                  |                | x          |                          |            | x          |                     | x              | x              | x          | x          | x          |
|                 |   | FSK - Bus (HART)                |                       |            |            |                  | x              | x          |                          |            |            |                     | x              |                | x          | x          |            |
|                 | Test jacks                                  | mA                              |                       |            |            |                  | x              |            |                          |            |            |                     | x              | x              |            | x          | x          |
|                 |   | FSK                             |                       |            |            | x                | x              |            |                          | x          |            | x                   | x              | x              | x          | x          | x          |
|                 | <b>Modules fits for:</b>                    |                                 |                       |            |            |                  |                |            |                          |            |            |                     |                |                |            |            |            |
|                 | V17111-100, Socket                          |                                 | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 | V17111-110, Socket                          |                                 | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 | V17111-120, Socket with power supply 24/24  |                                 |                       |            |            | x                | x              |            |                          |            |            | x                   | x              |                |            |            |            |
|                 | V17111-130, Socket with power supply 230/24 |                                 |                       |            |            | x                | x              |            |                          |            |            | x                   | x              |                |            |            |            |
|                 | V17111-2__, Backplane 8 way                 |                                 | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 | V17111-3__, Backplane 16 way                |                                 | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |
|                 | V17111-6__, Backplane 21 way                |                                 | x                     | x          | x          | x                | x              | x          | x                        | x          | x          | x                   | x              | x              | x          | x          | x          |



x = ok; - = not ok; o<sup>1</sup>= only with V17111-130; o<sup>2</sup> = only with V17111-120, -130
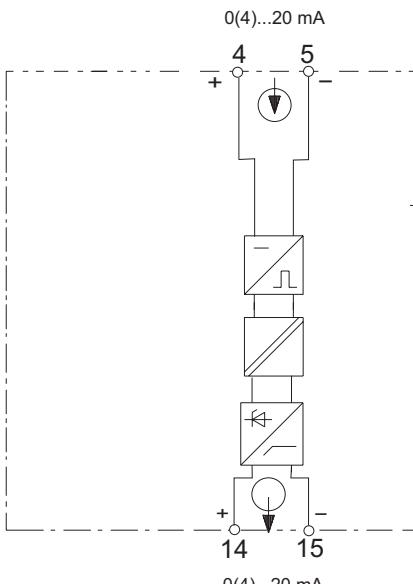
|  |  |                             |
|--|--|-----------------------------|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for standard signals 0(4)...20 mA<br/>(I/P converter, positioner)</b></li> <li><b>Low voltage drop</b></li> </ul> |  <p style="text-align: right;">ABB<br/>Contrans I<br/>V17153-110</p> | Module size 1               |
| <b>Input</b><br>  |  | Module fits for:            |
| Input current (0)4...20 mA   | Socket<br>V17111-100 ●   | Backplane<br>V17111-2 _ _ ● |
| OVERRANGING > 23.6 mA, max. 40 mA  | V17111-110 ●   | V17111-3 _ _ ●              |
| <b>Output</b><br>   | V17111-120 ○<br>V17111-130 ○   | V17111-6 _ _ ●              |
| Output current (short-circuit proof) (0)4...20 mA  |  |                             |
| Transformation ratio 1:1   |  |                             |
| Detect. of overranging (input, approx.) > 23.6 mA, max. 40 mA  |  |                             |
| Load 0...750 Ω   |  |                             |
| <b>General data</b>  |  |                             |
| Voltage drop < 1.5 V   |  |                             |
| <b>Isolation</b>   |  |                             |
| Input – output 1.35 kV <sup>1)</sup>   |  |                             |
| Max. ambient temperature -20...+60 °C  |  |                             |
| Weight 40 g  |  |                             |
| <b>Performance under reference conditions</b>  |  |                             |
| Linearity deviation < 0.1 %  |  |                             |
| Error limit < 0.1 %  |  |                             |
| Temperature effect < 0.1 %/10 K  |  |                             |
| Impedance effect < 0.18 %  |  |                             |
| Response time < 50 ms  |  |                             |
| 1) Rating voltage 50 V acc. to DIN EN 61010  |  |                             |
|   |  |                             |
|   |  |                             |

# Loop Powered Isolator

V17153-115

1 channel, bypass
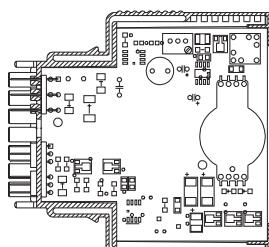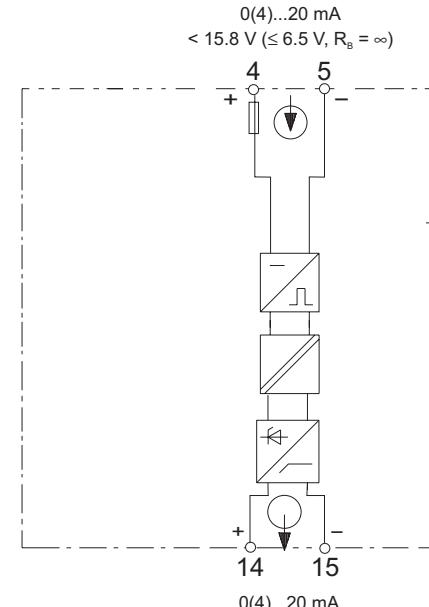
|   |  |        |           |            |   |            |   |            |   |            |   |
|---|--|--------|-----------|------------|---|------------|---|------------|---|------------|---|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for standard signals 0(4)...20 mA (I/P converter, positioner)</b></li> <li><b>The input signal is not interrupted at break on output (bypass)</b></li> </ul> | <br>  |        |           |            |   |            |   |            |   |            |   |
| <b>Input</b><br>   | Module fits for:<br><table> <tr> <td>Socket</td> <td>Backplane</td> </tr> <tr> <td>V17111-100</td> <td>●</td> </tr> <tr> <td>V17111-110</td> <td>●</td> </tr> <tr> <td>V17111-120</td> <td>○</td> </tr> <tr> <td>V17111-130</td> <td>○</td> </tr> </table> | Socket | Backplane | V17111-100 | ● | V17111-110 | ● | V17111-120 | ○ | V17111-130 | ○ |
| Socket  | Backplane  |        |           |            |   |            |   |            |   |            |   |
| V17111-100  | ●  |        |           |            |   |            |   |            |   |            |   |
| V17111-110  | ●  |        |           |            |   |            |   |            |   |            |   |
| V17111-120  | ○  |        |           |            |   |            |   |            |   |            |   |
| V17111-130  | ○  |        |           |            |   |            |   |            |   |            |   |
| Input current (0)4...20 mA<br>Overranging > 22 mA, max. 40 mA   |  |        |           |            |   |            |   |            |   |            |   |
| <b>Output</b><br>  |  |        |           |            |   |            |   |            |   |            |   |
| Output current (short-circuit proof) (0)4...20 mA<br>Transformation ratio 1:1<br>Detect. of overranging (input, approx.) 22...28.5 mA<br>Load 0...600 Ω   |  |        |           |            |   |            |   |            |   |            |   |
| <b>General data</b><br>Voltage drop < 3.8 V/< 6.8 V at load<br>160...600/0...160 Ω  |  |        |           |            |   |            |   |            |   |            |   |
| <b>Isolation</b><br>Input – output 2.3 kV<br>Max. ambient temperature -20...+60 °C<br>Weight 90 g   |  |        |           |            |   |            |   |            |   |            |   |
| <b>Performance under reference conditions</b><br>Linearity deviation < 0.1 %<br>Error limit < 0.1 %<br>Temperature effect < 0.1 %/10 K<br>Impedance effect < 0.18 %<br>Response time < 50 ms                                |   |        |           |            |   |            |   |            |   |            |   |

# Loop Powered Isolator


V17153-130

2 channels

|  |                       |  |
|--|-----------------------|--|
| <ul style="list-style-type: none"> <li><b>Electrical isolation for standard signals 0(4)...20 mA<br/>(I/P converter, positioner)</b></li> <li><b>Low voltage drop</b></li> </ul> |                       |  |
| <b>Input</b> per channel   |                       |  |
| Input current  | (0)4...20 mA          |  |
| OVERRANGING  | > 23.6 mA, max. 40 mA |  |
| <b>Output</b> per channel  |                       |  |
| Output current (short-circuit proof)   | (0)4...20 mA          |  |
| Transformation ratio   | 1:1                   |  |
| Detect. of overranging (input, approx.)  | > 23.6 mA, max. 40 mA |  |
| Load   | 0...750 $\Omega$      |  |
| <b>General data</b>  |                       |  |
| Voltage drop   | < 1.5 V               |  |
| <b>Isolation</b>   |                       |  |
| Input – output   | 1.35 kV <sup>1)</sup> |  |
| Channel 1 – channel 2  | 500 V                 |  |
| Max. ambient temperature   | -20...+60 °C          |  |
| Weight   | 90 g                  |  |
| <b>Performance under reference conditions</b>  |                       |  |
| Linearity deviation  | < 0.1 %               |  |
| Error limit  | < 0.1 %               |  |
| Temperature effect   | < 0.1 %/10 K          |  |
| Impedance effect   | < 0.18 %              |  |
| Response time  | < 50 ms               |  |
| 1) Rating voltage 50 V acc. to DIN EN 61010  |                       |  |

Module size 2

| Module fits for: |           |
|------------------|-----------|
| Socket           | Backplane |
| V17111-100       | ●         |
| V17111-110       | ●         |
| V17111-120       | ○         |
| V17111-130       | ○         |

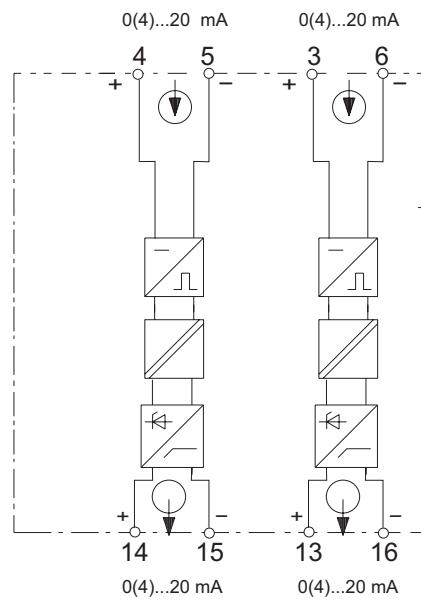

Channel 1





Channel 2

# Isolating Driver

V17153-210

1 channel


- Isolating driver for I/P converter
- Minimal power consumption

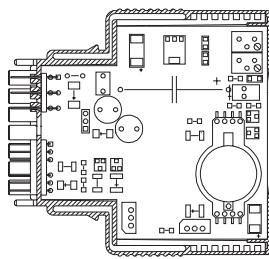

Module size 2

| <b>Input</b>                                  |                |
|---|----------------|
| Input current                                 | 4...20 mA      |
| Voltage drop                                  | < 1.5 V        |
| <b>Output</b>                                 |                |
| Output current (short-circuit proof)          | 4...20 mA      |
| Transformation ratio                          | 1:1            |
| Detect. of wire-break (input)                 | < 0.1 mA       |
| Detect. of overranging (input, approx.)       | > 22...30 mA   |
| Load  | 0...600 Ω      |
| Residual ripple (peak-to-peak)                | < 0.25 %       |
| <b>General data</b>                           |                |
| LED indicators, power "On" (green)            |                |
| <b>Isolation</b>                              |                |
| Output – input/power supply                   | 2.3 kV         |
| Max. ambient temperature                      | -20...+60 °C   |
| Weight  | 90 g           |
| <b>Power supply</b>                           |                |
| Rated voltage                                 | 19.2...30 V DC |
| Power consumption                             | 0.7 W          |
| Power dissipation                             | 0.7 W          |
| <b>Performance under reference conditions</b> |                |
| Linearity deviation                           | < 0.1 %        |
| Error limit                                   | < 0.25 %       |
| Temperature effect                            | < 0.1 %/10 K   |
| Impedance effect                              | < 0.1 %        |
| Response time                                 | < 50 ms        |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

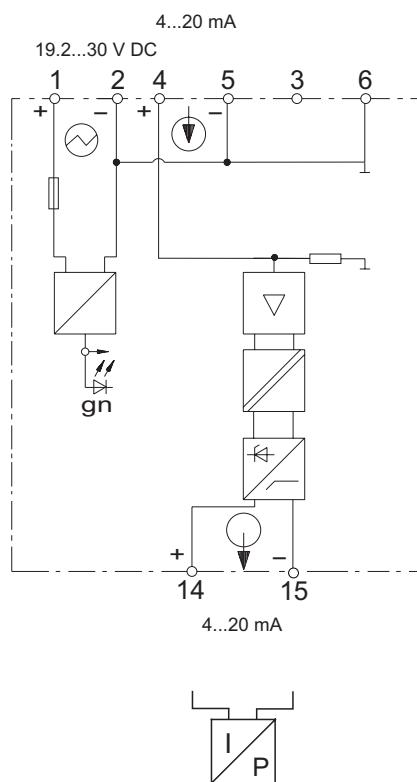


# Isolating Driver


1 channel, HART

V17153-220

- Isolating driver for I/P converter with HART communication
- Point to point communication
- Minimal power consumption

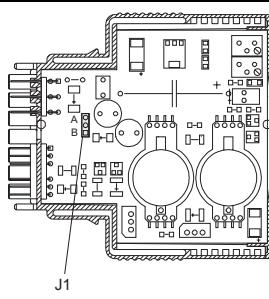

Module size 2



Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ●         |
| V17111-130 | ●         |
|            | ●         |
|            | ●         |
|            | ●         |

## Input



|               |   |
|---------------|---|
| Input current | 4...20 mA   |
| Voltage drop  | < 1.5 V; < 6.5 V (if source<br>not HART-kompatible) |

## Communication

|                    |                 |
|--------------------|-----------------|
| via terminals 3/6  |                 |
| via mA signal      |                 |
| Permeable protocol | HART            |
| Bandwidth          | 500 Hz...10 kHz |

## Output



|  |            |
|--|------------|
| Output current (short-circuit proof)   | 4...20 mA  |
| Transformation ratio                   | 1:1        |
| Detect. of wire-break (input)          | < 0.1 mA   |
| Detect of overranging (input, approx.) | 22...30 mA |
| Load                                   | 0...600 Ω  |
| Residual ripple (peak-to-peak)         | < 0.25 %   |

## General data

LED indicators, power "On" (green)

## Isolation

|                                 |              |
|---------------------------------|--------------|
| Output – input/power supply/FSK | 2.3 kV       |
| Max. ambient temperature        | -20...+60 °C |


Weight 90 g

## Power supply

|                   |                |
|-------------------|----------------|
| Rated voltage     | 19.2...30 V DC |
| Power consumption | 0.7 W          |
| Power dissipation | 0.7 W          |

## Performance under reference conditions

|                     |              |
|---------------------|--------------|
| Linearity deviation | < 0.1 %      |
| Error limit         | < 0.25 %     |
| Temperature effect  | < 0.1 %/10 K |
| Impedance effect    | < 0.1 %      |
| Response time       | < 50 ms      |

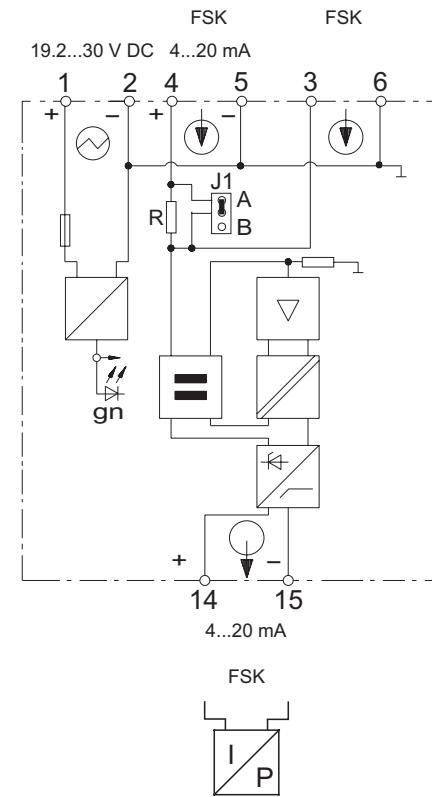

## Functions of the plug-in jumpers J.:

**J1** Minimum impedance for HHT to terminals 3/6  
A =  $U_J < 1.5 \text{ V}$   
(Source to terminal 4/5 HART-compatible)  
B =  $U_J < 6.5 \text{ V}$   
(Source to terminal 4/5 not HART-compatible)


The positions illustrated on the circuit diagram  
represented standard adjustments (delivery status)

# Isolating Driver

V17153-420

1 channel, HART, FSK bus


- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication

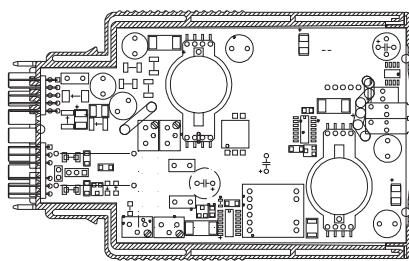

Module size 4

| <b>Input</b>                                  |                 |
|---|-----------------|
| Input current                                 | 4...20 mA       |
| Voltage drop                                  | < 6.9 V         |
| <b>Communication</b>                          |                 |
| via FSK bus (backplane/FSK bus amplifier)     |                 |
| via jacks 2 x 2 mm (front)                    |                 |
| Permeable protocol                            | HART            |
| Bandwidth                                     | 500 Hz...10 kHz |
| <b>Output</b>                                 |                 |
| Output current (short-circuit proof)          | 4...20 mA       |
| Transformation ratio                          | 1:1             |
| Detect. of wire break (input)                 | < 0.1 mA        |
| Detect. of overranging (input, approx.)       | 23...29 mA      |
| Load  | 0...600 Ω       |
| Residual ripple (peak-to-peak)                | < 0.25 %        |
| <b>General data</b>                           |                 |
| LED indicators, power "On" (green)            |                 |
| <b>Isolation</b>                              |                 |
| Output – input/power supply/FSK               | 2.3 kV          |
| Input – power supply – FSK                    | 500 V           |
| Max. ambient temperature                      | -20...+60 °C    |
| Weight  | 120 g           |
| <b>Power supply</b>                           |                 |
| Rated voltage                                 | 19.2...30 V DC  |
| Power consumption                             | 1.1 W           |
| Power dissipation                             | 1.1 W           |
| <b>Performance under reference conditions</b> |                 |
| Linearity deviation                           | < 0.1 %         |
| Error limit                                   | < 0.25 %        |
| Temperature effect                            | < 0.1 %/10 K    |
| Impedance effect                              | < 0.05 %        |
| Response time                                 | < 50 ms         |

| Module fits for: |   |
|------------------|---|
| Socket           |   |
| V17111-100       | ● |
| V17111-110       | ○ |
| V17111-120       | ○ |
| V17111-130       | ○ |
| Backplane        |   |
| V17111-2 _ _     | ● |
| V17111-3 _ _     | ● |
| V17111-6 _ _     | ● |

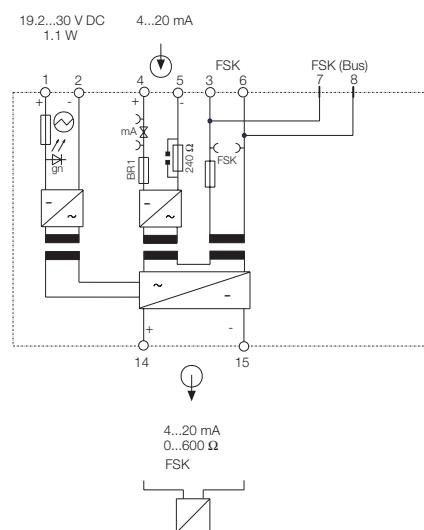


# Isolating Driver

V17153-440


2 channels, HART, FSK bus

- Isolating driver for I/P converter, positioner with HART-communication**
- FSK bus communication via backplanes and FSK bus amplifier**
- Electrical isolation between input/output/power supply and HART**
- Jacks for HART communication**

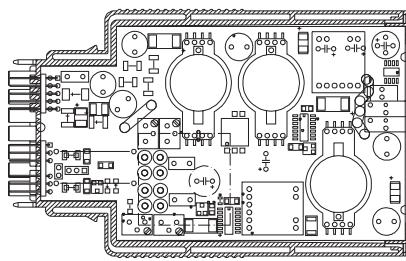

Module size 4

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       | V17111-7 _ _ |

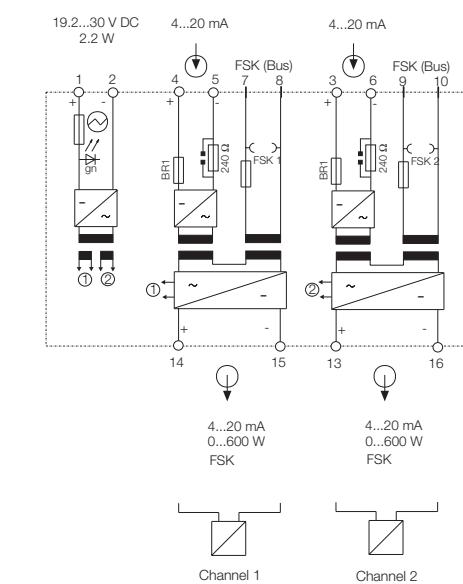

## Input per channel



Input current 4...20 mA

Voltage drop < 6.9 V

## Communication per channel

via FSK bus (backplane/FSK bus amplifier)

via jacks 2 x 2 mm (front)

Permeable protocol HART

Bandwidth 500 Hz...10 kHz

## Output per channel



Output current (short-circuit proof) 4...20 mA

Transformation ratio 1:1

Detect. of wire break (input) < 0.1 mA

Detect. of short-circuit (input, approx.) 23...28 mA

Load 0...600 Ω

Residual ripple (peak-to-peak) < 0.25 %

OVERRANGING in input 23...28 mA

## General data

LED indicators, power „On“ (green)

## Isolation per channel

Input – input/power supply/FSK 2.3 kV

Input – power supply/FSK 500 V

## Isolation channel 1 – channel 2

Input 1 – input 2 500 V

Output 1 – output 2 500 V

Max. ambient temperature -20...+60 °C

Weight 140 g

## Power supply

Rated voltage 19.2...30 V DC

Power consumption 2.2 W

Power dissipation 2.2 W

## Performance under reference conditions

Linearity deviation < 0.1 %

Error limit < 0.25 %


Temperature effect < 0.1 %/10 K

Impedance effect < 0.05 %

Response time < 50 ms





- Electrical isolation for standard signals 0(4)...20 mA (I/P converter, positioner)
- Low voltage drop

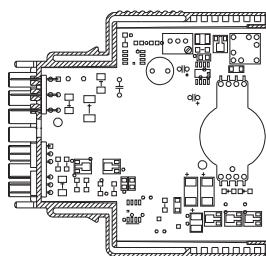

Module size 2

| <b>Input</b>                                  |   | (safe area)      | Module fits for: |              |  |  |
|---|---|------------------|------------------|--------------|--|--|
| Input current                                 | (0)4...20 mA <th>Socket</th> <th>Backplane</th> <td></td> | Socket           | Backplane        |              |  |  |
| Overranging                                   | > 22 mA, max. 40 mA                                       | V17111-100       | ●                | V17111-2 _ _ |  |  |
|   |   | V17111-110       | ●                | V17111-3 _ _ |  |  |
|   |   | V17111-120       | ○                | V17111-6 _ _ |  |  |
|   |   | V17111-130       | ○                |              |  |  |
| <b>Output</b>                                 |   | (hazardous area) |                  |              |  |  |
| Output current (short-circuit proof)          | (0)4...20 mA  |                  |                  |              |  |  |
| Transformation ratio                          | 1:1   |                  |                  |              |  |  |
| Detect. of overranging (input, approx.)       | 22...28.5 mA  |                  |                  |              |  |  |
| Load  | 0...600 Ω   |                  |                  |              |  |  |
| <b>Explosion protection</b>                   |   |                  |                  |              |  |  |
| Certificate of conformity                     | [EEx ib] IIC  |                  |                  |              |  |  |
| Max. short-circuit current                    | I <sub>o</sub> = 28.5 mA                                  |                  |                  |              |  |  |
| Max. voltage                                  | U <sub>o</sub> = 19 V                                     |                  |                  |              |  |  |
| Max. power                                    | P <sub>o</sub> = 542 mW                                   |                  |                  |              |  |  |
| Permitted external inductance                 | L <sub>a</sub> = 1.3 mH                                   |                  |                  |              |  |  |
| Permitted external capacitance                | C <sub>a</sub> = 110 nF                                   |                  |                  |              |  |  |
| <b>General data</b>                           |   |                  |                  |              |  |  |
| Voltage drop                                  | < 3 V/6 V at load   |                  |                  |              |  |  |
|   | 120...600/0...120 Ω                                       |                  |                  |              |  |  |
| <b>Isolation</b>                              |   |                  |                  |              |  |  |
| Input – output                                | 2.3 kV  |                  |                  |              |  |  |
| Max. ambient temperature                      | -20...+60 °C  |                  |                  |              |  |  |
| Weight  | 90 g  |                  |                  |              |  |  |
| <b>Performance under reference conditions</b> |   |                  |                  |              |  |  |
| Linearity deviation                           | < 0.1 %   |                  |                  |              |  |  |
| Error limit                                   | < 0.1 %   |                  |                  |              |  |  |
| Temperature effect                            | < 0.1 %/10 K  |                  |                  |              |  |  |
| Impedance effect                              | < 0.18 %  |                  |                  |              |  |  |
| Response time                                 | < 50 ms   |                  |                  |              |  |  |

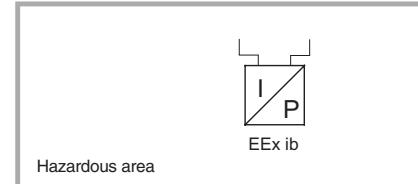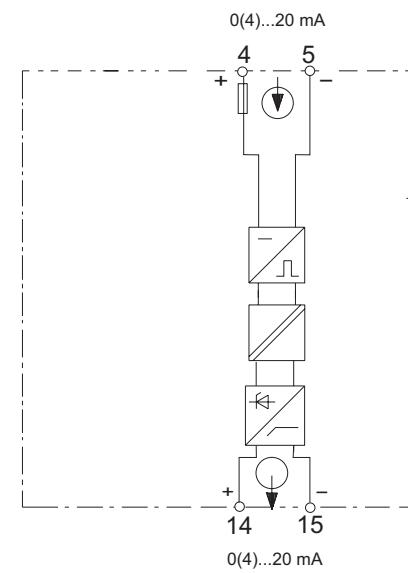


# Loop Powered Isolator Ex

1 channel, bypass

V17153-515





- Electrical isolation for standard signals 0(4)...20 mA (I/P converter, positioner)**
- The input signal is not interrupted at break on output (bypass)**

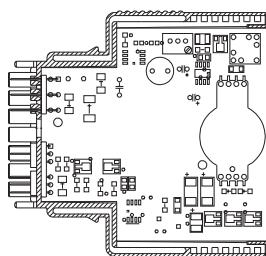

Module size 2

| <b>Input</b>                                  |                            | (safe area)      | Module fits for: |              |
|---|----------------------------|------------------|------------------|--------------|
| Input current                                 | (0)4...20 mA               |                  | Socket           | Backplane    |
| OVERRANGING                                   | > 22 mA, max. 40 mA        |                  | V17111-100       | V17111-2 _ _ |
| <b>Output</b>                                 |                            | (hazardous area) | V17111-110       | V17111-3 _ _ |
| Output current (short-circuit proof)          | (0)4...20 mA               |                  | V17111-120       | V17111-6 _ _ |
| Transformation ratio                          | 1:1                        |                  | V17111-130       |              |
| Detect. of overranging (input, approx.)       | 22...28.5 mA               |                  |                  |              |
| Load  | 0...600 $\Omega$           |                  |                  |              |
| <b>Explosion protection</b>                   |                            | [EEx ib] IIC     |                  |              |
| Certificate of conformity                     | PTB 00 ATEX 2017 X         |                  |                  |              |
| Max. short-circuit current                    | I <sub>o</sub> = 28.5 mA   |                  |                  |              |
| Max. voltage                                  | U <sub>o</sub> = 19 V      |                  |                  |              |
| Max. power                                    | P <sub>o</sub> = 542 mW    |                  |                  |              |
| Permitted external inductance                 | L <sub>a</sub> = 1.3 mH    |                  |                  |              |
| Permitted external capacitance                | C <sub>a</sub> = 110 nF    |                  |                  |              |
| <b>General data</b>                           |                            |                  |                  |              |
| Voltage drop                                  | < 3.8 V/6.8 V at load      |                  |                  |              |
|   | 120...600/0...120 $\Omega$ |                  |                  |              |
| <b>Isolation</b>                              |                            |                  |                  |              |
| Input – output                                | 2.3 kV                     |                  |                  |              |
| Max. ambient temperature                      | -20...+60 °C               |                  |                  |              |
| Weight  | 90 g                       |                  |                  |              |
| <b>Performance under reference conditions</b> |                            |                  |                  |              |
| Linearity deviation                           | < 0.1 %                    |                  |                  |              |
| Error limit                                   | < 0.1 %                    |                  |                  |              |
| Temperature effect                            | < 0.1 %/10 K               |                  |                  |              |
| Impedance effect                              | < 0.18 %                   |                  |                  |              |
| Response time                                 | < 50 ms                    |                  |                  |              |

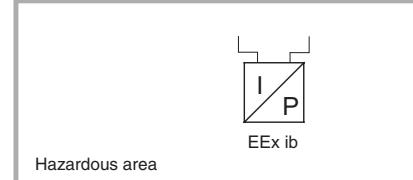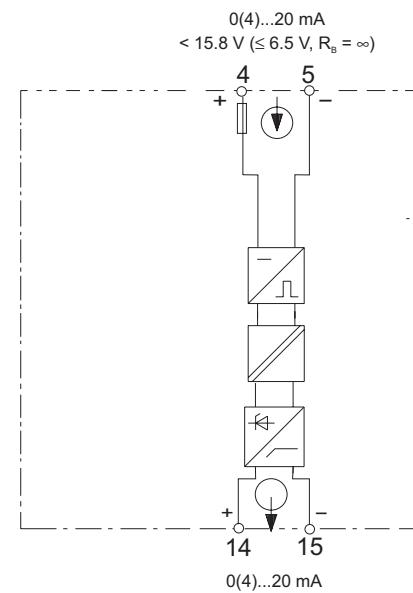


# Loop Powered Isolator Ex

1 channel, HART

V17153-520





- Electrical isolation for standard signals 0(4)...20 mA (I/P converter, positioner)
- Point-to-point communication
- Low voltage drop
- Jacks for HART communication

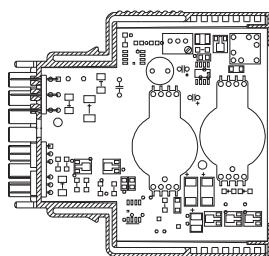

Module size 2

| Input                                   |                          |
|---|--------------------------|
| Input current                           | 4...20 mA                |
| OVERRANGING                             | > 23.6 mA; max. 40 mA    |
| Communication                           |                          |
| via terminals 3/6                       |                          |
| via mA signal 4/5                       |                          |
| via jacks 2 x 2 mm (front)              |                          |
| Permeable protocol                      | HART                     |
| Bandwidth                               | 500 Hz...10 kHz          |
| Output                                  |                          |
| Output current (short-circuit proof)    | 0(4)...20 mA             |
| Transformation ratio                    | 1:1                      |
| Detect. of overranging (input, approx.) | 22...28.5 mA             |
| Load                                    | 0...600 Ω                |
| Explosion protection                    |                          |
| Certificate of conformity               | [EEx ib] IIC             |
| Max. short-circuit current              | I <sub>o</sub> = 28.5 mA |
| Max. voltage                            | U <sub>o</sub> = 19 V    |
| Max. power                              | P <sub>o</sub> = 542 mW  |
| Permitted external inductance           | L <sub>a</sub> = 1.3 mH  |
| Permitted external capacitance          | C <sub>a</sub> = 110 nF  |
| General data                            |                          |
| Voltage drop                            | < 3.5 V / < 6 V at load  |
|   | 120...600/0...120 Ω      |
| Isolation                               |                          |
| Output – input/FSK                      | 2.3 kV                   |
| Max. ambient temperature                | -20...+60 °C             |
| Weight                                  | 90 g                     |
| Performance under reference conditions  |                          |
| Linearity deviation                     | < 0.1 %                  |
| Error limit                             | < 0.1 %                  |
| Temperature effect                      | < 0.1 %/10 K             |
| Impedance effect                        | < 0.18 %                 |
| Response time                           | < 50 ms                  |

| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

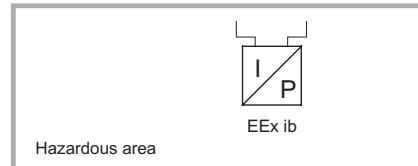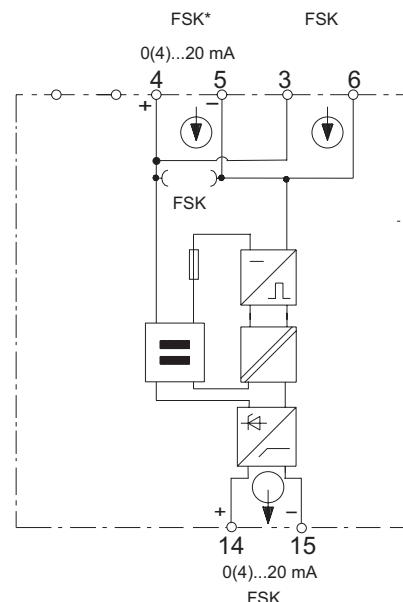

\* FSK only at load  $\geq 250 \Omega$  for the current source


# Isolating Driver Ex

1 channel

V17153-610





- Isolating driver for I/P converter
- Minimal power consumption

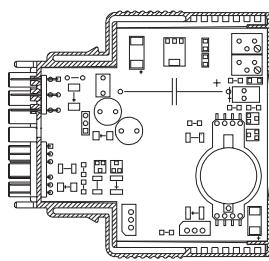

Module size 2

| Input                                   |  | (safe area)            | Module fits for: |   |
|---|--|------------------------|------------------|---|
| Input current                           | 4...20 mA <th>Socket</th> <th>Backplane</th> <th></th> | Socket                 | Backplane        |   |
| Voltage drop                            | < 1.5 V  | V17111-100             | V17111-2 _ _     | ● |
|   |  | V17111-110             | V17111-3 _ _     | ● |
|   |  | V17111-120             | V17111-6 _ _     | ● |
|   |  | V17111-130             |                  |   |
| Output                                  |  | (hazardous area)       |                  |   |
| Output current (short-circuit proof)    | 4...20 mA  |                        |                  |   |
| Transformation ratio                    | 1:1  |                        |                  |   |
| Detect. of wire break (input)           | < 0.1 mA   |                        |                  |   |
| Detect. of overranging (input, approx.) | 22...30 mA   |                        |                  |   |
| Load                                    | 0...600 Ω  |                        |                  |   |
| Residual ripple (peak-to-peak)          | < 0.25 %   |                        |                  |   |
| Explosion protection                    |  | [EEx ib] IIC           |                  |   |
| Certificate of conformity               |  | PTB No. Ex-95.D.2190 X |                  |   |
| Max. short-circuit current              | I <sub>o</sub> = 28.5 mA                               |                        |                  |   |
| Max. voltage                            | U <sub>o</sub> = 20 V                                  |                        |                  |   |
| Max. power                              | P <sub>o</sub> = 570 mW                                |                        |                  |   |
| Permitted external inductance           | L <sub>a</sub> = 1.3 mH                                |                        |                  |   |
| Permitted external capacitance          | C <sub>a</sub> = 95 nF                                 |                        |                  |   |
| General data                            |  |                        |                  |   |
| LED indicators, power "On" (green)      |  |                        |                  |   |
| Isolation                               |  |                        |                  |   |
| Output – input/power supply             | 2.3 kV   |                        |                  |   |
| Max. ambient temperature                | -20...+60 °C   |                        |                  |   |
| Weight                                  | 90 g   |                        |                  |   |
| Power supply                            |  | ~                      |                  |   |
| Rated voltage                           | 19.2...30 V DC   |                        |                  |   |
| Power consumption                       | 0.7 W  |                        |                  |   |
| Power dissipation                       | 0.7 W  |                        |                  |   |
| Performance under reference conditions  |  |                        |                  |   |
| Linearity deviation                     | < 0.1 %  |                        |                  |   |
| Error limit                             | < 0.25 %   |                        |                  |   |
| Temperature effect                      | < 0.1 %/10 K   |                        |                  |   |
| Impedance effect                        | < 0.1 %  |                        |                  |   |
| Response time                           | < 50 ms  |                        |                  |   |

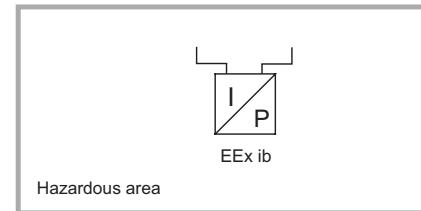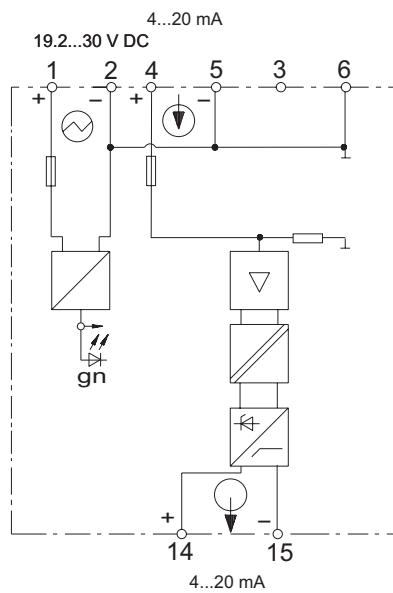


# Isolating Driver Ex

1 channel, HART

V17153-620




- Isolating driver for I/P converter, positioner with HART-communication
- Point to point communication
- Minimal power consumption

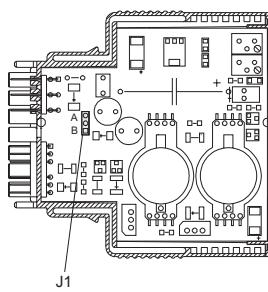

Module size 2

Module fits for:

| Socket     | Backplane |
|------------|-----------|
| V17111-100 | ●         |
| V17111-110 | ●         |
| V17111-120 | ●         |
| V17111-130 | ●         |

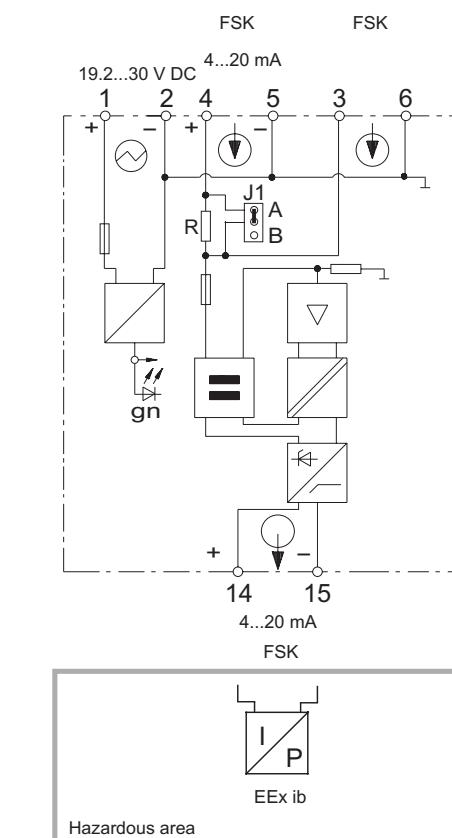

Functions of the plug-in jumpers J.:


J1      Minimum impedance for HHT to terminals 3/6  
A =  $U_i < 1.5 \text{ V}$   
(Source to terminal 4/5 HART-compatible)  
B =  $U_i < 6.5 \text{ V}$   
(Source to terminal 4/5 not HART-compatible)

The positions illustrated on the circuit diagram represented standard adjustments (delivery status)

| Input                                   | (safe area)                                      |
|---|--|
| Input current                           | 4...20 mA  |
| Voltage drop                            | < 1.5 V; < 6.5 V (if source not HART compatible) |
| Communication                           |  |
| via terminals 3/6                       |  |
| via mA signal 4/5                       |  |
| Permeable protocol                      | HART   |
| Bandwidth                               | 500 Hz...10 kHz                                  |
| Output                                  | (hazardous area)                                 |
| Output current (short-circuit proof)    | 4...20 mA  |
| Transformation ratio                    | 1:1  |
| Detect. of wire break (input)           | < 0.1 mA   |
| Detect. of overranging (input, approx.) | 22...30 mA                                       |
| Load                                    | 0...600 Ω  |
| Residual ripple (peak-to-peak)          | < 0.25 %   |
| Explosion protection                    | [EEx ib] IIC                                     |
| Certificate of conformity               | PTB No. Ex-95.D.2190 X                           |
| Max. short-circuit current              | $I_o = 28.5 \text{ mA}$                          |
| Max. voltage                            | $U_o = 20 \text{ V}$                             |
| Max. power                              | $P_o = 570 \text{ mW}$                           |
| Permitted external inductance           | $L_a = 1.3 \text{ mH}$                           |
| Permitted external capacitance          | $C_a = 95 \text{ nF}$                            |
| General data                            |  |
| LED indicators, power "On" (green)      |  |
| Isolation                               |  |
| Output – input/power supply/FSK         | 2.3 kV   |
| Max. ambient temperature                | -20...+60 °C                                     |
| Weight                                  | 90 g   |
| Power supply                            | ∅  |
| Rated voltage                           | 19.2...30 V DC                                   |
| Power consumption                       | 0.7 W  |
| Power dissipation                       | 0.7 W  |
| Performance under reference conditions  |  |
| Linearity deviation                     | < 0.1 %  |
| Error limit                             | < 0.25 %   |
| Temperature effect                      | < 0.1 %/10 K                                     |
| Impedance effect                        | < 0.1 %  |
| Response time                           | < 50 ms  |





- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal
- Jacks for HART communication

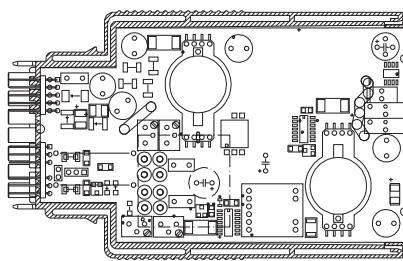

Module size 4

| <b>Input</b>                                  |  | (safe area)      | Module fits for: |              |  |  |
|---|--|------------------|------------------|--------------|--|--|
| Input current                                 | 4...20 mA <th>Socket</th> <th>Backplane</th> <td></td> | Socket           | Backplane        |              |  |  |
| Voltage drop                                  | < 6.9 V  | V17111-100       | ●                | V17111-2 _ _ |  |  |
| <b>Communication</b>                          |  | V17111-110       | ○                | V17111-3 _ _ |  |  |
| via FSK bus (backplane/FSK bus amplifier)     |  | V17111-120       | ○                | V17111-6 _ _ |  |  |
| via jacks 2 x 2 mm (front)                    |  | V17111-130       | ○                |              |  |  |
| <b>Output</b>                                 |  | (hazardous area) |                  |              |  |  |
| Output current (short-circuit proof)          | 4...20 mA  |                  |                  |              |  |  |
| Transformation ratio                          | 1:1  |                  |                  |              |  |  |
| Detect. of wire break (input)                 | < 0.1 mA   |                  |                  |              |  |  |
| Detect. of overranging (input, approx.)       | 23...29 mA   |                  |                  |              |  |  |
| Load  | 0...600 Ω  |                  |                  |              |  |  |
| Residual ripple (peak-to-peak)                | < 0.25 %   |                  |                  |              |  |  |
| <b>Explosion protection</b>                   |  | [EEx ia] II C    |                  |              |  |  |
| Certificate of conformity                     | PTB 98 ATEX 2183 X                                     |                  |                  |              |  |  |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA                                 |                  |                  |              |  |  |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V                                |                  |                  |              |  |  |
| Max. power                                    | P <sub>o</sub> = 610 mW                                |                  |                  |              |  |  |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH                                |                  |                  |              |  |  |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF                                 |                  |                  |              |  |  |
| <b>General data</b>                           |  |                  |                  |              |  |  |
| LED indicators, power "On" (green)            |  |                  |                  |              |  |  |
| <b>Isolation</b>                              |  |                  |                  |              |  |  |
| Input – output/power supply/FSK               | 2.3 kV   |                  |                  |              |  |  |
| Output – power supply – FSK                   | 500 V  |                  |                  |              |  |  |
| Max. ambient temperature                      | -20...+60 °C   |                  |                  |              |  |  |
| Weight  | 120 g  |                  |                  |              |  |  |
| <b>Power supply</b>                           |  |                  |                  |              |  |  |
| Rated voltage                                 | 19.2...30 V DC   |                  |                  |              |  |  |
| Power consumption                             | 1.1 W  |                  |                  |              |  |  |
| Power dissipation                             | 1.1 W  |                  |                  |              |  |  |
| <b>Performance under reference conditions</b> |  |                  |                  |              |  |  |
| Linearity deviation                           | < 0.1 %  |                  |                  |              |  |  |
| Error limit                                   | < 0.25 %   |                  |                  |              |  |  |
| Temperature effect                            | < 0.1 %/10 K   |                  |                  |              |  |  |
| Impedance effect                              | < 0.05 %   |                  |                  |              |  |  |
| Response time                                 | < 50 ms  |                  |                  |              |  |  |

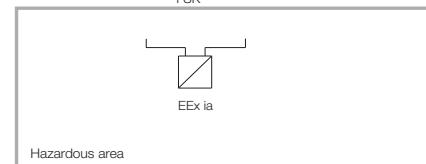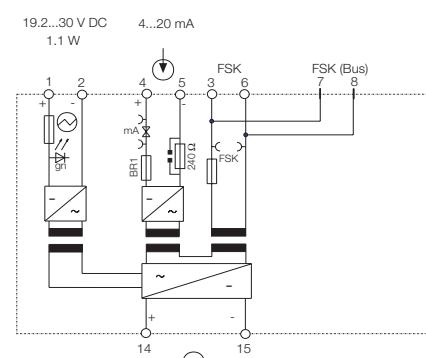

Hazardous area


# Isolating Driver Ex

1 channel, HART

V17153-825





- Isolating driver for I/P converter, positioner with HART-communication**
- Electrical isolation between input/output/power supply and HART**
- Testjacks for mA signal**
- Jacks for HART communication**

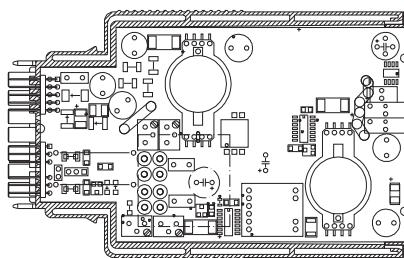

Module size 4

| <b>Input</b>                                  |                         |
|---|-------------------------|
| Input current                                 | 4...20 mA               |
| Voltage drop                                  | < 6.9 V                 |
| <b>Communication</b>                          |                         |
| via mA signal                                 |                         |
| via jacks 2 x 2 mm (front)                    |                         |
| Permeable protocol                            | HART                    |
| Bandwidth                                     | 500 Hz...10 kHz         |
| <b>Output</b>                                 |                         |
| Output current (short-circuit proof)          | 4...20 mA               |
| Transformation ratio                          | 1:1                     |
| Detect. of wire break (input)                 | < 0.1 mA                |
| Detect. of overranging (input, approx.)       | 23...29 mA              |
| Load  | 0...600 Ω               |
| Residual ripple (peak-to-peak)                | < 0.25 %                |
| <b>Explosion protection</b>                   |                         |
| Certificate of conformity                     | PTB 98 ATEX 2183 X      |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA  |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V |
| Max. power                                    | P <sub>o</sub> = 610 mW |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF  |
| <b>General data</b>                           |                         |
| LED indicators, power "On" (green)            |                         |
| <b>Isolation</b>                              |                         |
| Input – output/power supply/FSK               | 2.3 kV                  |
| Output – power supply – FSK                   | 500 V                   |
| Max. ambient temperature                      | -20...+60 °C            |
| Weight  | 120 g                   |
| <b>Power supply</b>                           |                         |
| Rated voltage                                 | 19.2...30 V DC          |
| Power consumption                             | 1.1 W                   |
| Power dissipation                             | 1.1 W                   |
| <b>Performance under reference conditions</b> |                         |
| Linearity deviation                           | < 0.1 %                 |
| Error limit                                   | < 0.25 %                |
| Temperature effect                            | < 0.1 %/10 K            |
| Impedance effect                              | < 0.05 %                |
| Response time                                 | < 50 ms                 |


| Module fits for: |              |
|------------------|--------------|
| Socket           | Backplane    |
| V17111-100       | V17111-2 _ _ |
| V17111-110       | V17111-3 _ _ |
| V17111-120       | V17111-6 _ _ |
| V17111-130       |              |

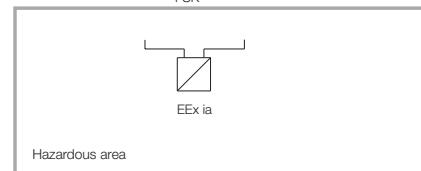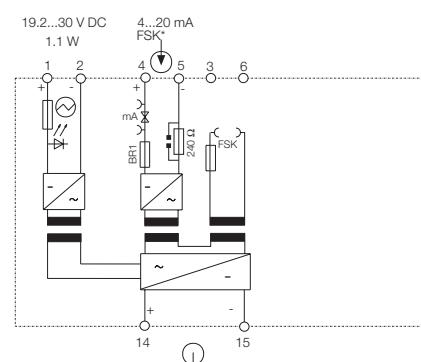

\* FSK only at load  $\geq 250 \Omega$  for the current source




- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication via backplanes and FSK bus amplifier
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication

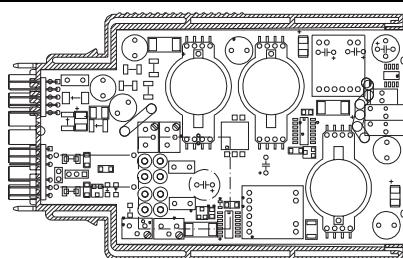


Module size 4

|   |                         |
|---|-------------------------|
| <b>Input</b> per channel                      | ↓ (safe area)           |
| Input current                                 | 4...20 mA               |
| Voltage drop                                  | < 6.9 V                 |
| <b>Communication</b> per channel              |                         |
| via FSK bus (backplane/FSK bus amplifier)     |                         |
| via jacks 2 x 2 mm (front)                    |                         |
| Permeable protocols                           | HART                    |
| Bandwidth                                     | 500 Hz...10 kHz         |
| <b>Output</b> per channel                     | ↓ (hazardous area)      |
| Output current (short-circuit proof)          | 4...20 mA               |
| Transformation ratio                          | 1:1                     |
| Detect. of wire break (input)                 | < 0.1 mA                |
| Detect. of short-circuit (input, approx.)     | 23...28 mA              |
| Load  | 0...600 Ω               |
| Residual ripple (peak-to-peak)                | < 0.25 %                |
| OVERRANGING in input                          | 23...28 mA              |
| <b>Explosion protection</b>                   | [EEx ia] IIC            |
| Certificate of conformity                     | PTB 98 ATEX 2183 X      |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA  |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V |
| Max. power                                    | P <sub>o</sub> = 610 mW |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF  |
| <b>General data</b>                           |                         |
| LED indicators, power "On" (green)            |                         |
| <b>Isolation</b> per channel                  |                         |
| Input – output/power supply/FSK               | 2.3 kV                  |
| Output – power supply/FSK                     | 500 V                   |
| <b>Isolation</b> channel 1 – channel 2        |                         |
| Input 1 – input 2                             | 500 V                   |
| Output 1 – output 2                           | 500 V                   |
| Max. ambient temperature                      | -20...+60 °C            |
| Weight  | 140 g                   |
| <b>Power supply</b>                           | ⊕                       |
| Rated voltage                                 | 19.2...30 V DC          |
| Power consumption                             | 2.2 W                   |
| Power dissipation                             | 2.2 W                   |
| <b>Performance under reference conditions</b> |                         |
| Linearity deviation                           | < 0.1 %                 |
| Error limit                                   | < 0.25 %                |
| Temperature effect                            | < 0.1 %/10 K            |
| Impedance effect                              | < 0.05 %                |
| Response time                                 | < 50 ms                 |

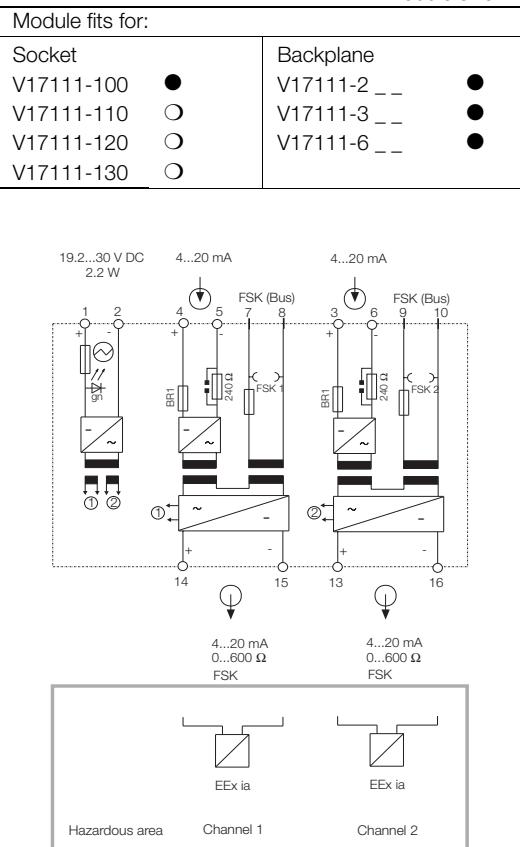




- Isolating driver for I/P converter, positioner with HART-communication**
- Electrical isolation between input/output/power supply and HART**
- Jacks for HART communication**

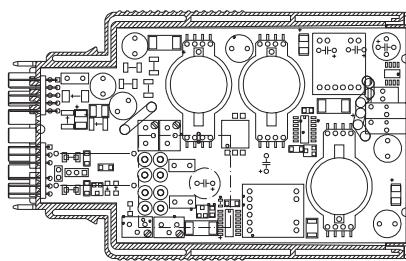

Module size 4

|   |                         |                         |                   |           |
|---|-------------------------|-------------------------|-------------------|-----------|
| <b>Input</b> per channel                      |                         | (safe area)             | Module fits for:  |           |
| Input current                                 | 4...20 mA               | Socket                  | V17111-100        | ●         |
| Voltage drop                                  | < 6.9 V                 | Backplane               | V17111-2          | —         |
| <b>Communication</b> per channel              |                         |                         | V17111-3          | ●         |
| via mA signal                                 |                         |                         | V17111-6          | —         |
| via jacks 2 x 2 mm (front)                    |                         |                         | V17111-120        | ○         |
| Permeable protocol                            | HART                    |                         | V17111-130        | ○         |
| Bandwidth                                     | 500 Hz...10 kHz         |                         |                   |           |
| <b>Output</b> per channel                     | (hazardous area)        |                         |                   |           |
| Output current (short-circuit proof)          | 4...20 mA               | 19.2...30 V DC<br>2.2 W | 4...20 mA         | 4...20 mA |
| Transformation ratio                          | 1:1                     | FSK*                    | FSK*              | FSK*      |
| Detect. of wire break (input)                 | < 0.1 mA                | BR1                     | Z <sub>10</sub> Ω | BR1       |
| Detect. of short-circuit (input, approx.)     | 23...29 mA              |                         | Z <sub>10</sub> Ω |           |
| Load  | 0...600 Ω               |                         |                   |           |
| Residual ripple (peak-to-peak)                | < 0.25 %                |                         |                   |           |
| OVERRANGING in input                          | 23...28 mA              |                         |                   |           |
| <b>Explosion protection</b>                   | [EEx ia] IIC            |                         |                   |           |
| Certificate of conformity                     | PTB 98 ATEX 2183 X      |                         |                   |           |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA  |                         |                   |           |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V |                         |                   |           |
| Max. power                                    | P <sub>o</sub> = 610 mW |                         |                   |           |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH |                         |                   |           |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF  |                         |                   |           |
| <b>General data</b>                           |                         |                         |                   |           |
| LED indicators, power "On" (green)            |                         |                         |                   |           |
| <b>Isolation</b> per channel                  |                         |                         |                   |           |
| Output – input/power supply/FSK               | 2.3 kV                  |                         |                   |           |
| Input – power supply – FSK                    | 500 V                   |                         |                   |           |
| <b>Isolation</b> channel 1 – channel 2        |                         |                         |                   |           |
| Input 1 – input 2                             | 500 V                   |                         |                   |           |
| Output 1 – output 2                           | 500 V                   |                         |                   |           |
| Max. ambient temperature                      | -20...+60 °C            |                         |                   |           |
| Weight  | 140 g                   |                         |                   |           |
| <b>Power supply</b>                           | ( $\oplus$ )            |                         |                   |           |
| Rated voltage                                 | 19.2...30 V DC          |                         |                   |           |
| Power consumption                             | 2.2 W                   |                         |                   |           |
| Power dissipation                             | 2.2 W                   |                         |                   |           |
| <b>Performance under reference conditions</b> |                         |                         |                   |           |
| Linearity deviation                           | < 0.1 %                 |                         |                   |           |
| Error limit                                   | < 0.25 %                |                         |                   |           |
| Temperature effect                            | < 0.01 %/10 K           |                         |                   |           |
| Impedance effect                              | < 0.05 %                |                         |                   |           |
| Response time                                 | < 50 ms                 |                         |                   |           |

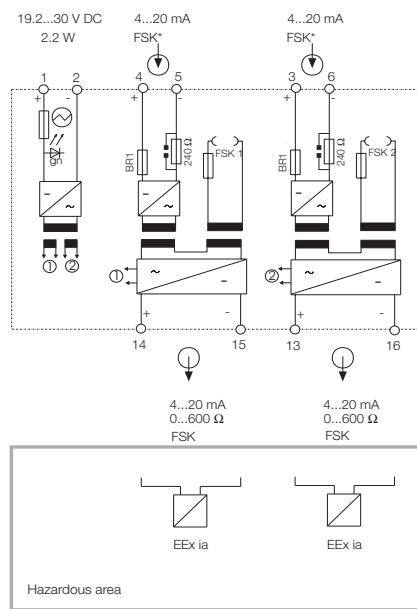

Hazardous area

\* FSK only at load  $\geq 250 \Omega$  for the current source

## **Monitoring Modules**

---

### **Trip Amplifier**


Trip Amplifier                    2 alarms, 2 relays . . . . .                    V17171-110

# Trip Amplifier

2 alarms, 2 relays


V17171-110

- 1 input 0(4)...20 mA
- 2 alarms with one relay each or
- 1 alarm with 2 relays
- Operating and quiescent current for each alarm
- with/without wire-break and short-circuit monitoring
- Set point adjustment with decade switch

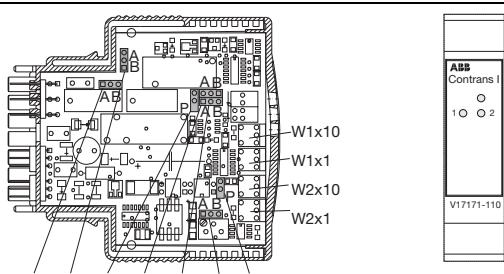

Module size 2

| Output  |   | Module fits for: |
|---|---|------------------|
| Input   |   | Socket           |
| Relay contact Rs2/Rs1                                 | NC/NO contacts (via jumpers J1/J2)  | V17111-100       |
| Contact rating  | 250 V AC, 1 A, $\cos\phi > 0.7$   | V17111-110       |
|   | 30 V DC, 2 A, resistive load  | V17111-120       |
| Mechanical life expectancy                            | $> 3 \cdot 10^7$ operations   | V17111-130       |
| Contact life expectancy                               | $> 10^6$ operations at maximum load   |                  |
| Behavior during wire break,<br>short-circuit at input | Relay drop (only for 4...20 mA, independent<br>of alarm signal) jumper J3 = open  | V17111-2 _ _     |
|   |   | V17111-3 _ _     |
|   |   | V17111-6 _ _     |
| <b>Alarm section</b>                                  |   |                  |
| Number of alarms                                      | 2 (independent)   |                  |
| Alarm setting   | 1- and ten-steps<br>(behind removable front cover)  |                  |
| Adjustment range                                      | 0...99 % (0...19.8 mA/4...19.84 mA)   |                  |
| Resolution  | 1 %   |                  |
| Switch hysteresis                                     | 0.8 % referred to 0/4...20 mA   |                  |
| Effective direction                                   | operating current (relay pick up at $X > W$ )<br>quiescent current (relay pick up at $X < W$ )<br>independent for both relays |                  |
| <b>General data</b>                                   |   |                  |
| LED display   | power "On" (green)  |                  |
| LED display   | switching status relay  |                  |
|   | "flooded with current" (red)  |                  |
| Spark quenching unit                                  | 100 $\Omega$ /22 nF (between terminals 4,5/3,6)   |                  |
| <b>Isolation per channel</b>                          |   |                  |
| Input – power supply                                  | 500 V   |                  |
| Output – power supply/input                           | 2.3 kV  |                  |
| Max. ambient temperature                              | -20...+60 °C  |                  |
| Weight  | 90 g  |                  |
| <b>Power supply</b>                                   |   |                  |
| Connection  | terminals 1(+); 2(-)  |                  |
| Rated voltage   | 19.2...30 V DC  |                  |
| Power consumption                                     | approx. 0.7 W   |                  |
| <b>Characteristics under reference conditions</b>     |   |                  |
| Temperature effect                                    | < 0.1 %/10 K  |                  |
| Response time   | $\leq 300$ ms   |                  |

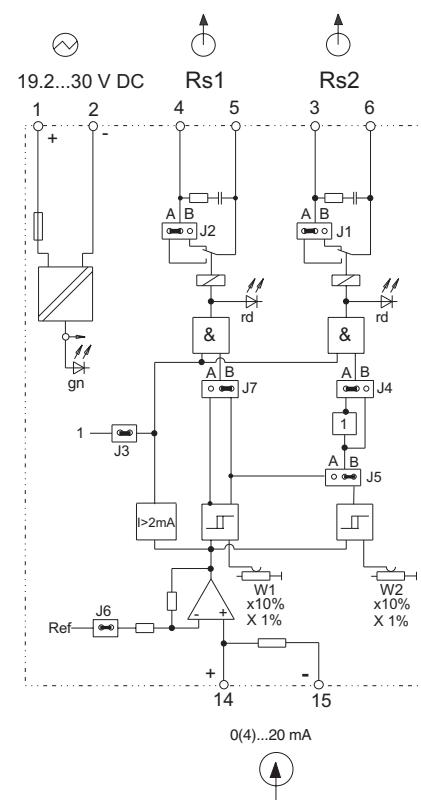

#### Functions of the plug-in jumpers J.:

- J1/J2** Relay output Rs2/Rs1  
A = NO  
B = NC
- J3** Line break and short-circuit monitoring (4...20 mA)  
closed = inactive  
open (parked) = active  
**J4/J7** Effective direction  
B = relay pick up at  $X > W$  (operating current)  
A = relay pick up at  $X < W$  (quiescent current)
- J5** Relay assignment  
A = W1 affects Rs1 and Rs2  
(1 alarm, 2 relays)  
B = W1 affects Rs1, W2 affects Rs2  
(2 alarms, 2 relays)
- J6** Input  
closed = 4...20 mA  
open (parked) = 0...20 mA

The positions illustrated on the circuit diagram represent standard adjustments (delivery status)

## Sockets, Backplanes

---

### Sockets, Backplanes


|                                 |       |            |
|---------------------------------|-------|------------|
| Socket                          | ..... | V17111-100 |
| Socket                          | ..... | V17111-110 |
| Socket with power supply 24/24  | ..... | V17111-12_ |
| Socket with power supply 230/24 | ..... | V17111-13_ |
| Backplane, 8-way                | ..... | V17111-2_  |
| Backplane, 16-way               | ..... | V17111-3_  |
| Backplane, 21-way               | ..... | V17111-6_  |

|                      |       |          |
|----------------------|-------|----------|
| Dimensional drawings | ..... | page 116 |
|----------------------|-------|----------|

- For mounting the Contrans I modules
- Standard terminal layout
- Maintenance-free connection technique
- For Ex and non-Ex modules
- Encoding field for module assignment


### System connection

|                              |   |
|------------------------------|---|
| Connection terminals 1, 2    | 19.2...30 V DC  |
| Connection technique         | 6pin double-tiered terminals (cage clamp spring)                              |
| Rated terminal cross-section | 0.08...2.5 mm <sup>2</sup> / AWG 26...14"                                     |
|                              | single copper wiring, stranded<br>with/without wire end ferrule <sup>1)</sup> |

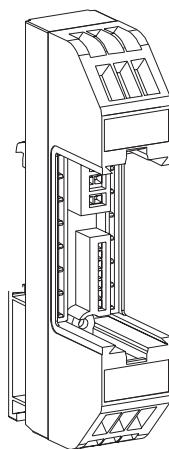

### Field connection

|                              |   |
|------------------------------|---|
| Connection                   | terminals 11, 12, 13, 14, 15, 16  |
| Connection technique         | 6pin double-tiered terminals (cage clamp spring)                              |
| Rated terminal cross-section | 0.08...2.5 mm <sup>2</sup> / AWG 26...14"                                     |
|                              | single copper wiring, stranded<br>with/without wire end ferrule <sup>1)</sup> |

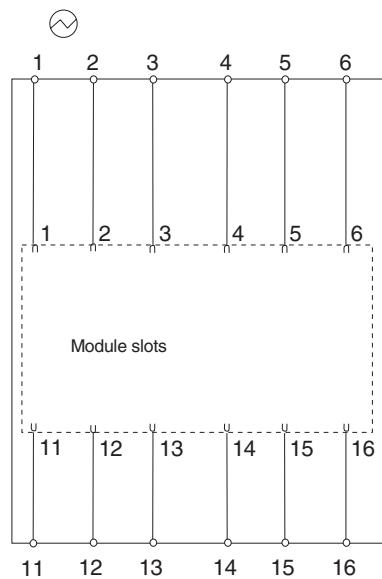


### General data

|                        |  |
|------------------------|--|
| Mounting type          | can be snap-fitted onto 35 mm standard rail to DIN EN 50022  |
| Protected to DIN 40050 | IP 20  |
| Protection class       | II (to DIN EN 61010)   |
| Test voltage           | 3.7 kV terminals 1...6 – 11...16<br>2.3 kV terminals 1, 2 – 4, 5 – 3, 6<br>1.35 kV terminals 11, 14, 15 – 12, 13, 16 |
| Colour                 | RAL 7035   |
| Material               | Polycarbonate  |
| Weight                 | 50 g   |

<sup>1)</sup> With wire end ferrules max. 1.5 mm<sup>2</sup>

System connection

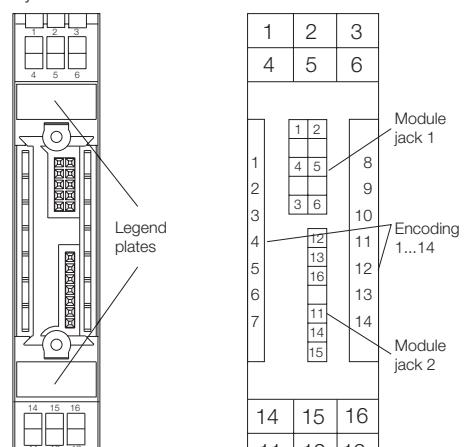


Field connection

- For mounting the Contrans I modules
- Standard terminal layout
- Maintenance-free connection technique
- For Ex and non-Ex modules
- Encoding field for module assignment


### System connection

|                              |   |
|------------------------------|---|
| Connection                   | terminals 1, 2, 3, 4, 5, 6  |
| Connection technique         | 6pin double-tiered terminals (cage clamp spring)                              |
| Rated terminal cross-section | 0.08...2.5 mm <sup>2</sup> / AWG 26...14"                                     |
|                              | single copper wiring, stranded<br>with/without wire end ferrule <sup>1)</sup> |

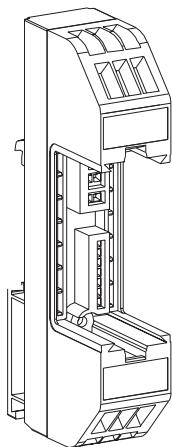

### Field connection


|                              |   |
|------------------------------|---|
| Connection                   | terminals 11, 12, 13, 14, 15, 16  |
| Connection technique         | 6pin double-tiered terminals (cage clamp spring)                              |
| Rated terminal cross-section | 0.08...2.5 mm <sup>2</sup> / AWG 26...14"                                     |
|                              | single copper wiring, stranded<br>with/without wire end ferrule <sup>1)</sup> |

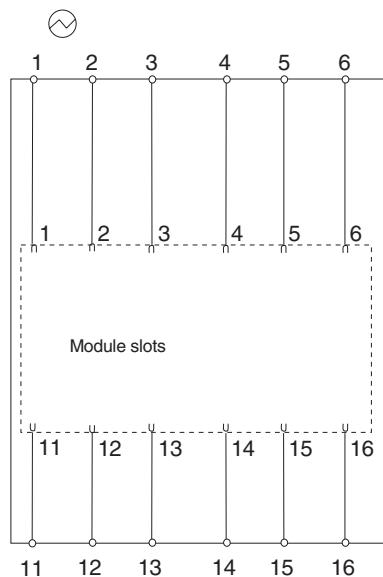

### General data

|                        |  |
|------------------------|--|
| Mounting location      | can be snap-fitted onto 35 mm standard rail to DIN EN 50022  |
| Protected to DIN 40050 | IP 20  |
| Protection class       | II (to DIN EN 61010)   |
| Test voltage           | 3.7 kV terminals 1...6 – 11...16<br>2.3 kV terminals 1, 2 – 4, 5 – 3, 6<br>1.35 kV terminals 11, 14, 15 – 12, 13, 16 |
| Colour                 | RAL 7035   |
| Material               | Polycarbonate  |
| Weight                 | 50 g   |

<sup>1)</sup> With wire end ferrules max. 1.5 mm<sup>2</sup>

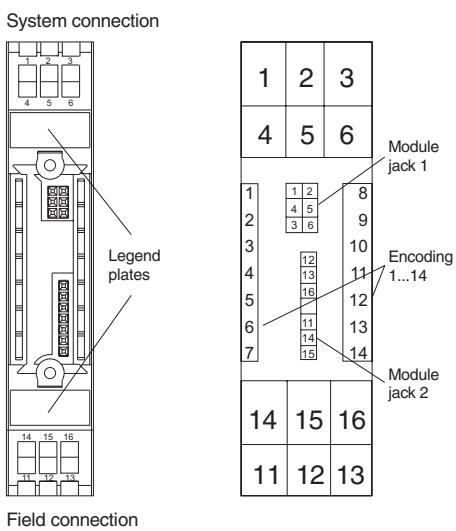

# Socket

V17111-12

with power supply unit 24/24

- For installing Contrans I modules
- Integrated power supply unit 19...33 V/24 V
- Electrical isolation to mains
- Standard terminal layout
- Maintenance-free connection technique
- for Ex- and non-Ex modules
- Encoding field for module assignment

## Type

|            |                             |
|------------|-----------------------------|
| V17111-120 | standard version            |
| V17111-121 | for temperature transmitter |
|            | with input for thermocouple |

## System connection

### Power supply



|                     |  |
|---------------------|--|
| Connection          | terminals 1, 2                             |
| Rated voltage range | 19.2...33 V DC                             |
| Power consumption   | appr. 1.5 W for CI module V17151-2X, -6X   |
|                     | appr. 1.1 W for CI module V17153-2X, -6X   |
| Fusing              | Fuse T 0.25 A integr. in power supply unit |

### Output

|                 |  |
|-----------------|--|
| Connection      | power supply for the plugged modules                           |
| Isolation       | the output is electrically isolated from the power supply      |
| Rated voltage   | 24 V ± 10 %  |
| Rated current   | 83 mA, non short-circuit proof                                 |
| Terminals 3...6 | signal current circuits of the module (see module description) |

## Field connection

|                   |  |
|-------------------|--|
| Terminals 11...16 | signal current circuits of the module (see module description) |
|-------------------|--|

## Safety data

|                     |   |
|---------------------|---|
| Protection class    | II (to DIN EN 61010-1)  |
| Oversupply category | II  |
| Pollution degree    | 2   |
| Type of protection  | IP 20 (to EN 60259/DIN VDE 0470 part 1)   |
| Output              | functional extra-low voltage to VDE 0100 part 410/IEC 364-4-41 with safe electrical isolation |
| Test voltages       | 2.3 kV power supply – 24 V module supply<br>2.3 kV power supply – terminals 3...6, 11...16    |



The requirement of the EMC guideline 89/336/EWG and the low voltage guideline 73/23/EWG are met

## General data


|                              |   |
|------------------------------|---|
| Connection technique         | 6-pin double-tiered terminal (cage clamp spring)  |
| Rated terminal cross section | 0.08...2.5 mm <sup>2</sup> /AWG 26...14", single copper wiring, stranded, with wire end ferrule (max. 1.5 mm <sup>2</sup> ) |
| Type of mounting             | can be snap-fitted onto 35 mm standard rail to DIN EN 50022   |
| Mounting location            | outside the hazardous area (for the supply of Ex-modules, pay attention to VDE 0165)  |
| Mounting orientation         | horizontal or vertical  |

## Ambient conditions

|                       |   |
|-----------------------|---|
| Operating temperature | -20...+60 °C for horizontal mounting              |
|                       | -20...+55 °C for vertical mounting                |
| Relative humidity     | < 85 %, 3K3 to IEC 721, part 3-3, no condensation |
| Weight                | 80 g  |

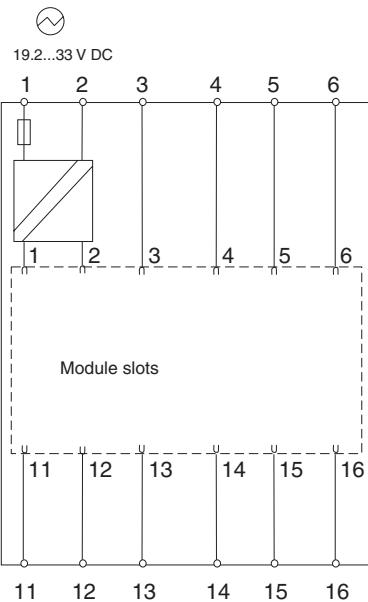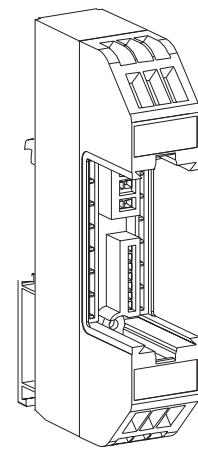

## System connection

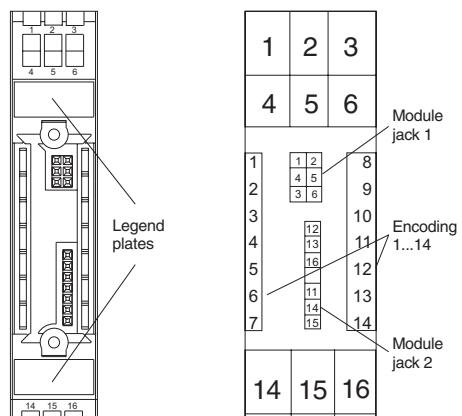

## Field connection



Field connection


# Socket

V17111-13

with power supply unit 230/24

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li><b>For installing Contrans I modules</b></li> <li><b>Integrated power supply unit 95...253 V/24 V</b></li> <li><b>Electrical isolation to mains</b></li> <li><b>Standard terminal layout</b></li> <li><b>Maintenance-free connection technique</b></li> <li><b>for Ex- and non-Ex modules</b></li> <li><b>Encoding field for module assignment</b></li> </ul> |   |
| <b>Type</b>  |   |
| V17111-130   | standard version  |
| V17111-131   | for temperature transmitter<br>with input for thermocouple  |
| <b>System connection</b>   |   |
| <b>Power supply</b>  | ~   |
| Connection   | terminals 1, 2  |
| Rated voltage range  | 95...253 V AC/48...62 Hz  |
| Power consumption  | appr. 1.5 W for CI module V17151-2X, -6X<br>appr. 1.1 W for CI module V17153-2X, -6X  |
| Fusing   | Fuse T 0.1 A integr. in power supply unit   |
| <b>Output</b>  |   |
| Connection   | power supply for the plugged modules  |
| Isolation  | the output is electrically isolated from<br>the power supply  |
| Rated voltage  | 24 V ± 10 %   |
| Rated current  | 83 mA, non short-circuit proof  |
| Terminals 3...6  | signal current circuits of the module<br>(see module description)   |
| <b>Field connection</b>  |   |
| Terminals 11...16  | signal current circuits of the module<br>(see module description)   |
| <b>Safety data</b>   |   |
| Protection class   | II (to DIN EN 61010-1)  |
| Oversupply category  | II  |
| Pollution degree   | 2   |
| Type of protection   | IP 20 (to EN 60259/DIN VDE 0470 part 1)   |
| Output   | functional extra-low voltage to VDE 0100<br>part 410/IEC 364-4-41 with safe<br>electrical isolation                               |
| Test voltages  | 2.3 kV power supply – 24 V module supply<br>2.3 kV power supply – terminals 3...11, 11...16                                       |
| The requirement of the EMC guideline 89/336/EWG and<br>the low voltage guideline 73/23/EWG are met   |   |
| <b>General data</b>  |   |
| Connection technique   | 6-pin double-tiered terminal (cage clamp spring)  |
| Rated terminal cross section   | 0.08...2.5 mm <sup>2</sup> /AWG 26...14",<br>single copper wiring, stranded,<br>with wire end ferrule (max. 1.5 mm <sup>2</sup> ) |
| Type of mounting   | can be snap-fitted onto 35 mm<br>standard rail to DIN EN 50022  |
| Mounting location  | outside the hazardous area<br>(for the supply of Ex-modules,<br>pay attention to VDE 0165)  |
| Mounting orientation   | horizontal or vertical  |
| <b>Ambient conditions</b>  |   |
| Operating temperature  | -20...+60 °C for horizontal mounting<br>-20...+55 °C for vertical mounting  |
| Relative humidity  | < 85 %, 3K3 to IEC 721, part 3-3, no condensation   |
| Weight   | 80 g  |

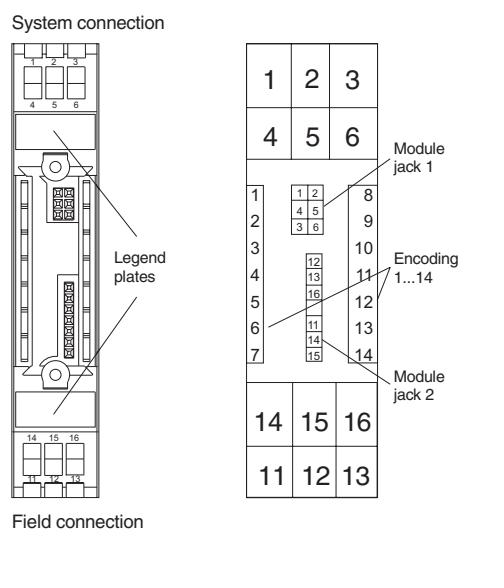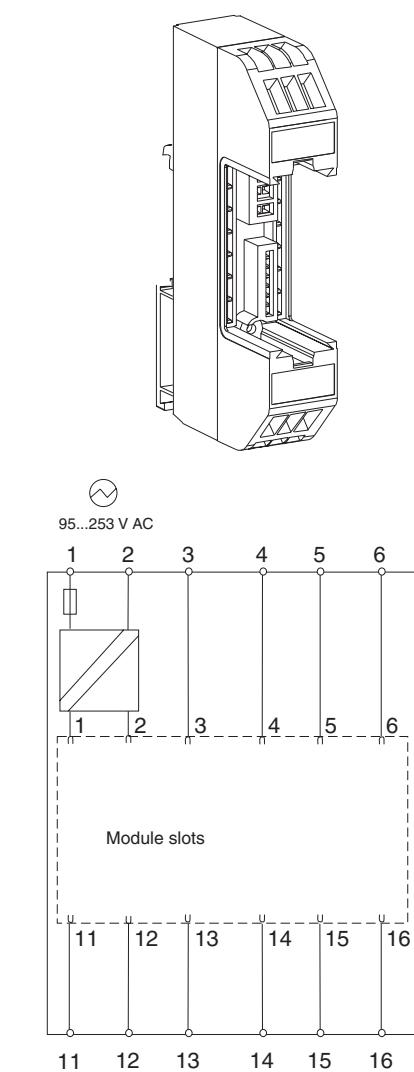



|   |  |
|---|--|
| <ul style="list-style-type: none"> <li><b>For installing 8 Contrans I modules</b></li> <li><b>Signal processing up to 16 Ex or non Ex signals</b></li> <li><b>Separate fusing for modules and signal circuits</b></li> <li><b>Simple design of FSK bus through pluggable bus amplifier</b></li> </ul> |   |
| <b>System connection</b>  |  |
| <b>Signales</b>   | <b>X101/X102</b> (slot 1...8, terminal 3...6)  |
| Socket/type   | Pin terminal/SLD 3.5 V/36/90F 3.2 SNOR   |
| Connector/type  | Female multipoint connector/BL 3.5/18/FSNOR (for max. 1.5 mm <sup>2</sup> wire cross section)  |
| Rated voltage   | ≤ 30 V AC/DC (functional extra low voltage with safe electrical isolation<br>to VDE 0100 part 410/IEC 364-4-41)  |
| <b>FSK bus</b>  | <b>X110</b> (terminal 5...8)   |
| Socket/type   | Pin terminal/SLD 3.5 V/4/F 3.2 SNOR  |
| Connector/type  | Female multipoint connector/BL 3.5/2/FSNOR (for max. 1.5 mm <sup>2</sup> wire cross section)   |
| FSK bus amplifier   | X108 (slot 1...8, terminal 7, 9)   |
| Socket/type   | 37pin SUB-D  |
| Connector/type  | FSK bus amplifier V17191-160 (option)  |
| <b>Power supply</b>   | ⊕ X1 (terminal 1...4)  |
| Socket/type   | Screw terminal for max. 2.5 mm <sup>2</sup> wire cross section   |
| Rated voltage   | 19.2...30 V DC (see rated voltage of the CI modules)   |
| Fusing power supply modules   | T 2.5 A  |
| Fusing power supply signals   | T 1.6 A  |
| <b>Field connection</b>   |  |
| <b>Signales</b>   | Slot 1...21, terminals 11...16   |
| V17111-221  | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour grey)  |
| Slot  | Pluggable screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour grey)  |
| Connector   | Type of connector MSTB 2.5/3-ST (for max. 2.5 mm <sup>2</sup> wire cross section)  |
| V17111-251  | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour blue)  |
| Rated voltage   | 250 V AC (375 V peak value to EN 50020 for Ex application)   |
| <b>General data</b>   |  |
| Safe electrical isolation to<br>EN 61010/EN 50020 (Ex)  | System connection – field connection, module slot – module slot  |
| <b>Isolation</b>  | System connection – field connection: 3.7 kV<br>Module slot – module slot (field connection): 3.7 kV<br>Per module slot (field connection), terminals 11, 14, 15 – 12, 13, 16: 1.35 kV |
| Max. ambient temperature  | -20...+60 °C for horizontal mounting; -20...+55 °C for vertical mounting   |
| Relative humidity   | < 85 %, 3K3 to IEC 721, part 3-3, no condensation  |
| Type of protect. to EN 60529/<br>DIN VDE 0470 part 1  | IP 00 (the backplane must be so installed that at least IP 20 is guaranteed)   |
| Mounting type   | can be snapped-fitted onto 35 mm standard rails to DIN EN 50022  |
| Mounting location   | Outside hazardous area (attention to VDE 0165, IEC 79-14 in case Ex application)   |
| Mounting orientation  | horizontal or vertical   |
| Weight  | 369 g  |

## Backplane


V17111-2


8way

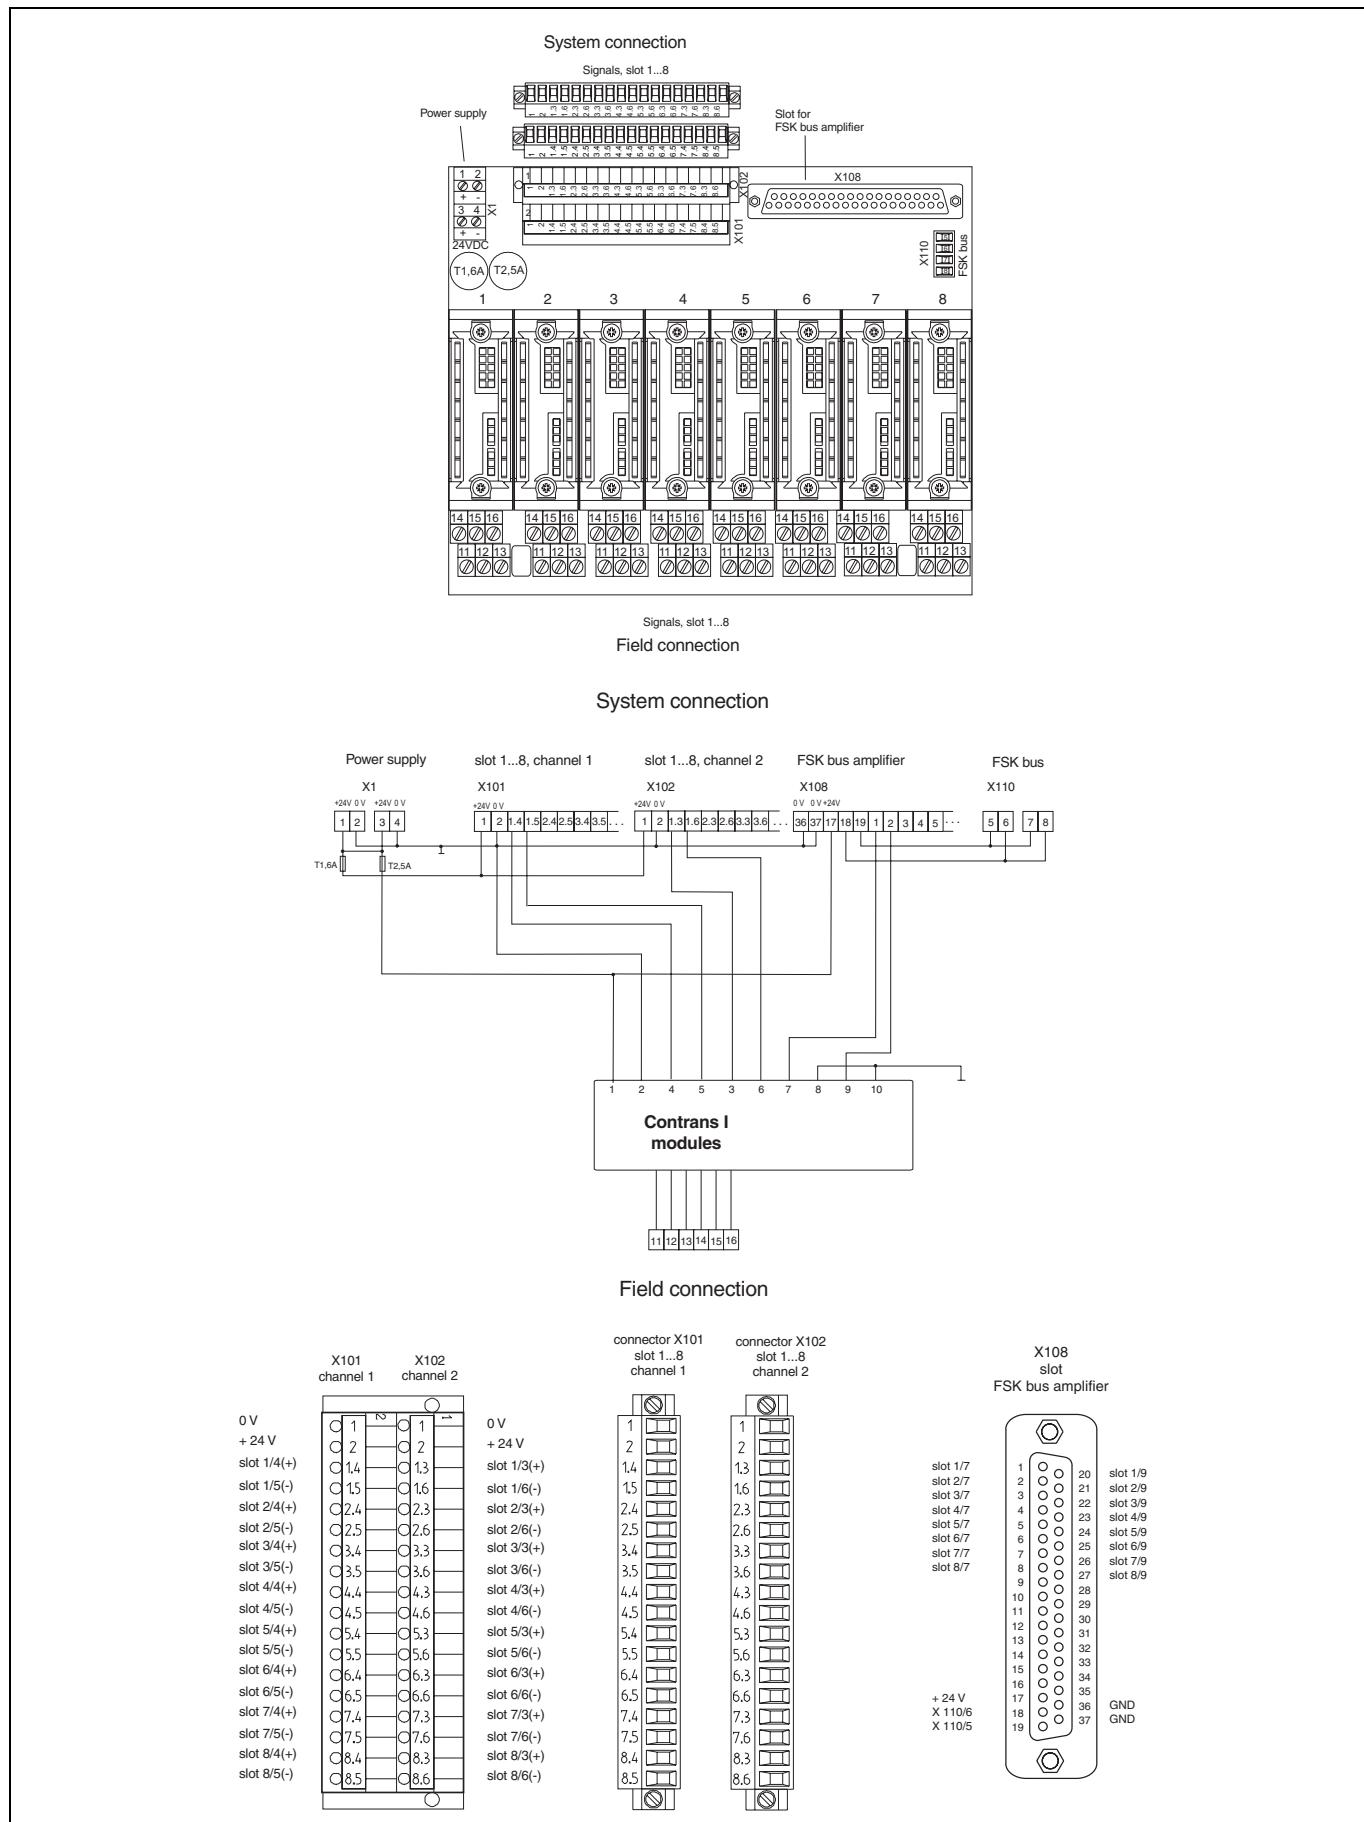

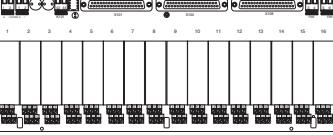
|   |  |
|---|--|
| <ul style="list-style-type: none"> <li><b>For installing 16 Contrans I modules</b></li> <li><b>Signal processing up to 32 Ex or non Ex signals</b></li> <li><b>Redundant power supply with signal contact</b></li> <li><b>Separate fusing for modules and signal circuits</b></li> <li><b>Simple design of FSK bus through pluggable bus amplifier</b></li> </ul> |   |
| <b>System connection</b>  |  |
| <b>Signales</b>   | <b>X101/X102</b> (slot 1...16, terminal 3...6)   |
| Socket/type   | 37pin SUB-D  |
| Rated voltage   | $\leq 30$ V AC/DC (functional extra low voltage with safe electrical isolation to VDE 0100 part 410/IEC 364-4-41)  |
| <b>FSK bus</b>  | <b>X110</b> (terminal 5...8)   |
| Socket/type   | Screw terminals for max. $2.5 \text{ mm}^2$ wire cross section   |
| FSK bus amplifier   | X108 (slot 1...16, terminal 7, 9)  |
| Socket/type   | 37pin SUB-D  |
| Connector/type  | FSK bus amplifier V17191-160/-320 (option)   |
| <b>Power supply</b>   | $\odot$ <b>X1</b> (terminal 1...4)   |
| Socket/type   | Screw terminal for max. $2.5 \text{ mm}^2$ wire cross section  |
| Rated voltage   | 19.2...30 V DC (see rated voltage of the CI modules)   |
| Voltage drop through redundant supply diodes  | 1.4 V  |
| Wrong polarity protection   | yes  |
| Fusing power supply modules   | T 3.15 A   |
| Fusing power supply signals   | T 2 A  |
| Fuse monitoring   | Failure of one or both fuses is signalled by the opening of the relay contact and the extinction of the LED  |
| <b>Signal contact</b>   | <b>X105</b> (terminal 43, 44 – NO contact from relais)   |
| Socket/type   | Screw terminals for max. $2.5 \text{ mm}^2$ wire cross section   |
| Switching capacity  | $\leq 10$ W, 10 VA, $\cos\phi \geq 0.7$  |
| Switching current   | $\leq 0.5$ A UC  |
| Switching voltage   | $\leq 50$ V UC   |
| <b>Field connection</b>   |  |
| <b>Signales</b>   | Slot 1...16, terminals 11...16   |
| V17111-331  | Screw terminals for max. $2.5 \text{ mm}^2$ wire cross section (colour grey)   |
| Slot  | Pluggable screw terminals for max. $2.5 \text{ mm}^2$ wire cross section (colour grey)   |
| Connector   | Type of connector MSTB 2.5/3-ST (for max. $2.5 \text{ mm}^2$ wire cross section)   |
| V17111-351  | Screw terminals for max. $2.5 \text{ mm}^2$ wire cross section (colour blue)   |
| Rated voltage   | 250 V AC (375 V peak value to EN 50020 for Ex application)   |
| <b>General data</b>   |  |
| Safe electrical isolation to EN 61010/EN 50020 (Ex)   | System connection – field connection, module slot – module slot  |
| <b>Isolation</b>  | System connection – field connection: 3.7 kV<br>Module slot – module slot (field connection): 3.7 kV<br>Per module slot (field connection), terminals 11, 14, 15 – 12, 13, 16: 1.35 kV |
| Max. ambient temperature  | -20...+60 °C for horizontal mounting; -20...+55 °C for vertical mounting   |
| Relative humidity   | < 85 %, 3K3 to IEC 721, part 3-3, no condensation  |
| Type of protect. to EN 60529/ DIN VDE 0470 part 1   | IP 00 (the backplane must be so installed that at least IP 20 is guaranteed)   |
| Mounting type   | Can be snapped-fitted onto 35 mm standard rails acc. to DIN EN 50022   |
| Mounting location   | Outside hazardous area (attention to VDE 0165, IEC 79-14 in case Ex application)   |
| Mounting orientation  | horizontal or vertical   |
| Weight  | 600 g  |

16way

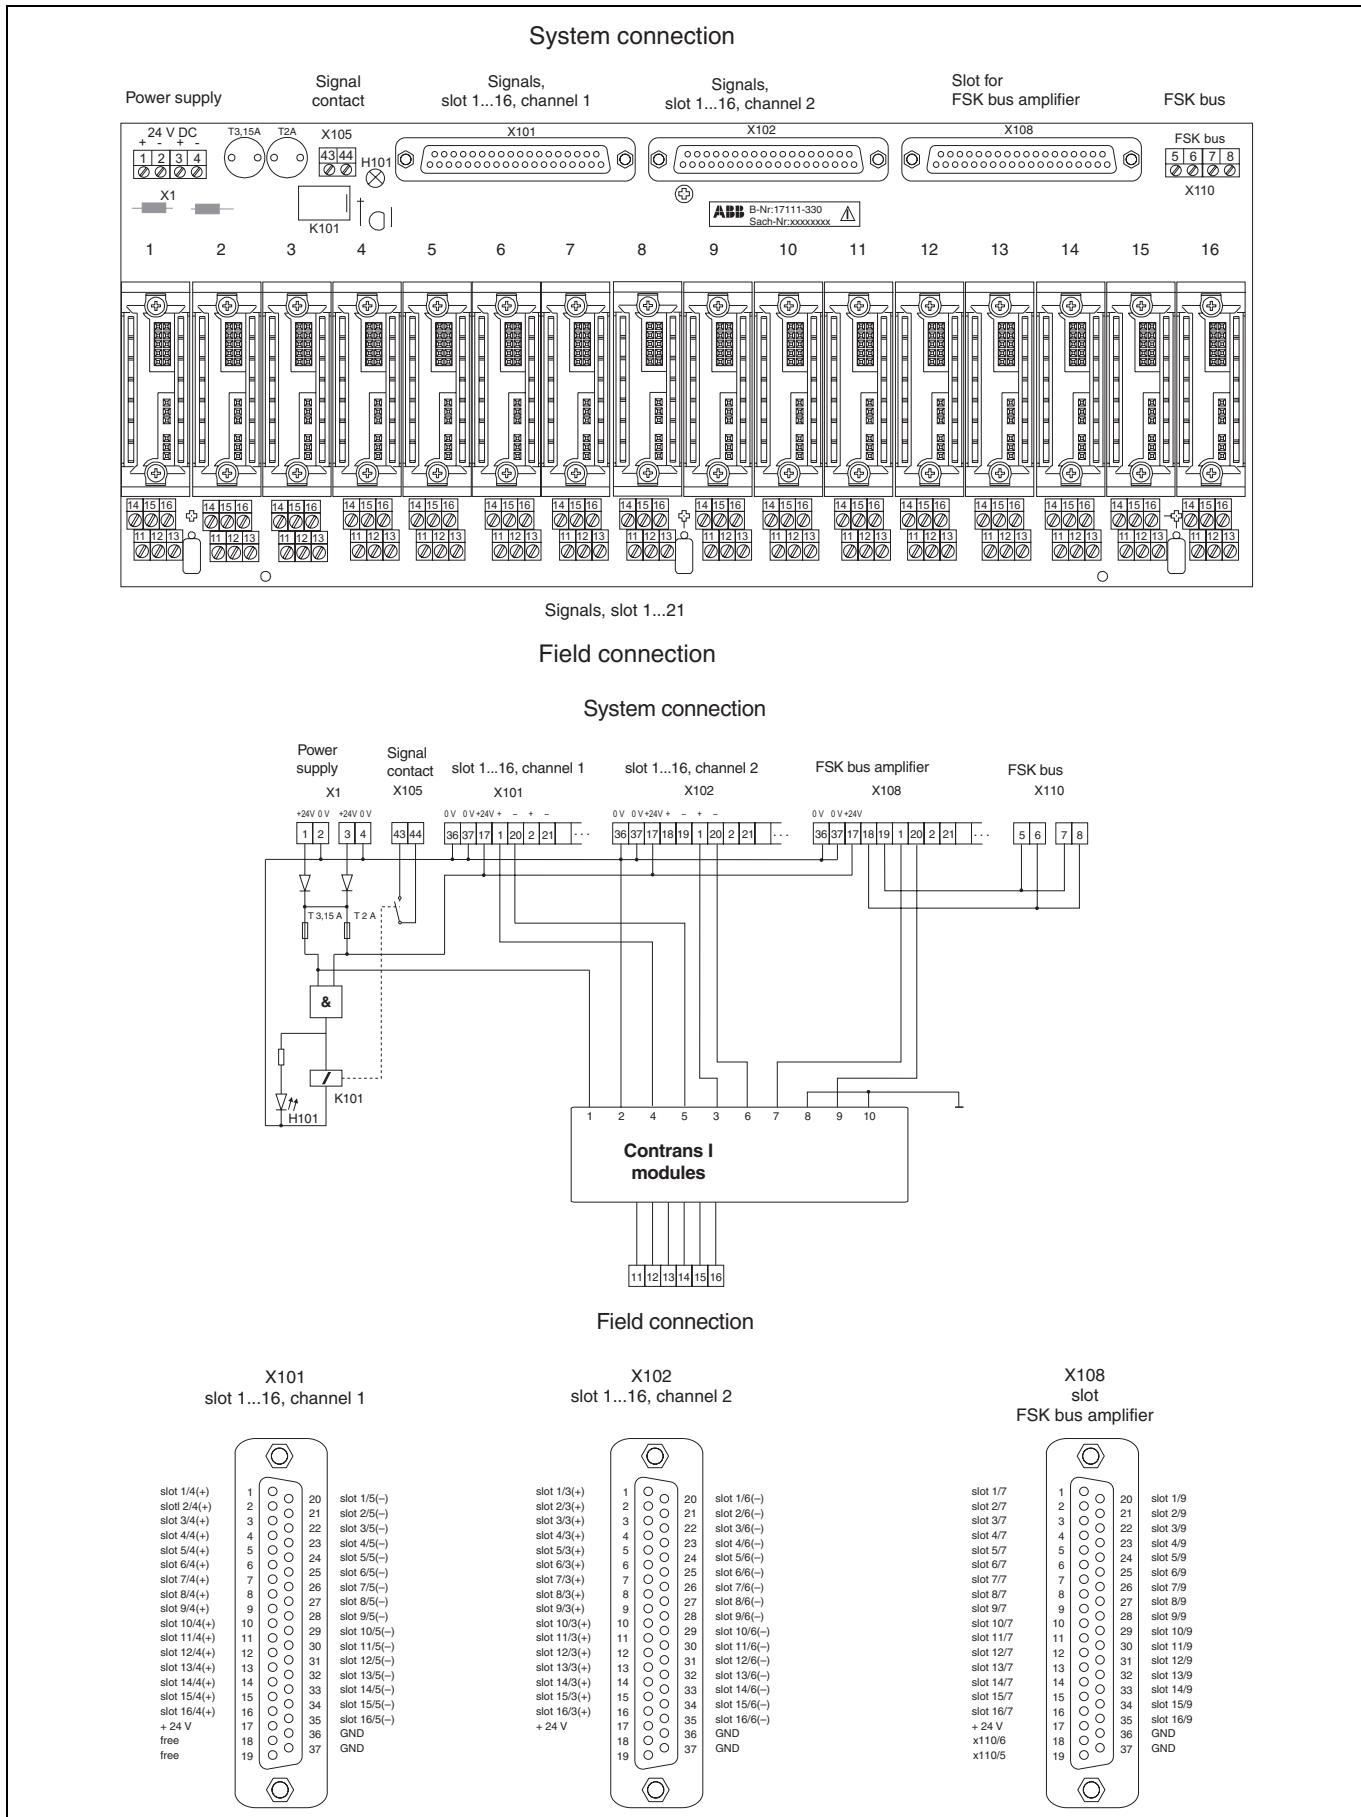

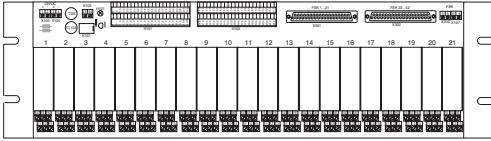
|   |  |
|---|--|
| <ul style="list-style-type: none"> <li><b>For installing 21 Contrans I modules</b></li> <li><b>Signal processing up to 42 Ex or non Ex signals</b></li> <li><b>Redundant power supply with signal contact</b></li> <li><b>Separate fusing for modules and signal circuits</b></li> <li><b>Simple design of FSK bus trough pluggable bus amplifier</b></li> <li><b>Preference for 19" racks</b></li> </ul> |                            |
| <b>System connection</b>  |  |
| <b>Signales</b>   | <b>X101/X102/X103/X104</b> (slot 1...21, terminal 3, 4, 5, 6)  |
| Socket/type   | Pin terminal/SLD 3.5 V/44/90G 3.2 SNOR   |
| Connector/type  | Female multipoint connector/BL 3.5/2/SNOR (for max. 1.5 mm <sup>2</sup> wire cross section)                  |
| Rated voltage   | ≤ 30 V AC/DC (functional extra low voltage with safe electrical isolation to VDE 0100 part 410/IEC 364-4-41) |
| <b>FSK bus</b>  | <b>X110</b> (terminal 5...8)   |
| Socket/type   | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section  |
| FSK bus amplifier   | X108/X109 (slot 1...21, terminal 7, 9)   |
| Socket/type   | 37pin SUB-D  |
| Connector/type  | FSK bus amplifier V17191-21 (option)   |
| <b>Power supply</b>   | ∅ <b>X1</b> (terminal 1...4)   |
| Socket/type   | Screw terminal for max. 2.5 mm <sup>2</sup> wire cross section   |
| Rated voltage   | 19.2...30 V DC (see rated voltage of the CI modules)   |
| Voltage drop through redundant supply diodes  | 1.4 V  |
| Wrong polarity protection   | yes  |
| Fusing power supply modules   | T 3.15 A   |
| Fusing power supply signals   | T 2 A  |
| Fuse monitoring   | Failure of one or both fuses is signalled by the opening of the relay contact and the extinction of the LED  |
| <b>Signal contact</b>   | <b>X105</b> (terminal 43, 44 – NO contact from relais)   |
| Socket/type   | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section  |
| Switching capacity  | ≤ 10 W, 10 VA, cosφ ≥ 0.7  |
| Switching current   | ≤ 0.5 A UC   |
| Switching voltage   | ≤ 50 V UC  |
| <b>Field connection</b>   |  |
| <b>Signales</b>   | Slot 1...21, terminals 11...16   |
| V17111-621  | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour grey)                                |
| Slot V17111-622   | Pluggable screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour grey)                      |
| Connector V17111-622  | Type of connector MSTB 2.5/3-ST (for max. 2.5 mm <sup>2</sup> wire cross section)                            |
| V17111-651  | Screw terminals for max. 2.5 mm <sup>2</sup> wire cross section (colour blue)                                |
| Rated voltage   | 250 V AC (375 V peak value to EN 50020 for Ex application)   |
| <b>General data</b>   |  |
| Safe electrical isolation to EN 61010/EN 50020 (Ex)   | System connection – field connection, module slot – module slot  |
| <b>Isolation</b>  | System connection – field connection: 3.7 kV   |
|   | Module slot – module slot (field connection): 3.7 kV   |
|   | Per module slot (field connection), terminals 11, 14, 15 – 12, 13, 16: 1.35 kV                               |
| Max. ambient temperature  | -20...+60 °C for horizontal mounting; -20...+55 °C for vertical mounting                                     |
| Relative humidity   | < 85 %, 3K3 to IEC 721, part 3-3, no condensation  |
| Type of protect. to EN 60529/ DIN VDE 0470 part 1   | IP 00 (the backplane must be so installed that at least IP 20 is guaranteed)                                 |
| Mounting type   | Mounting in 19"-system   |
| Mounting location   | Outside hazardous area (attention to VDE 0165, IEC 79-14 in case Ex application)                             |
| Mounting orientation  | horizontal or vertical   |
| Weight  | 1561 g   |

21way

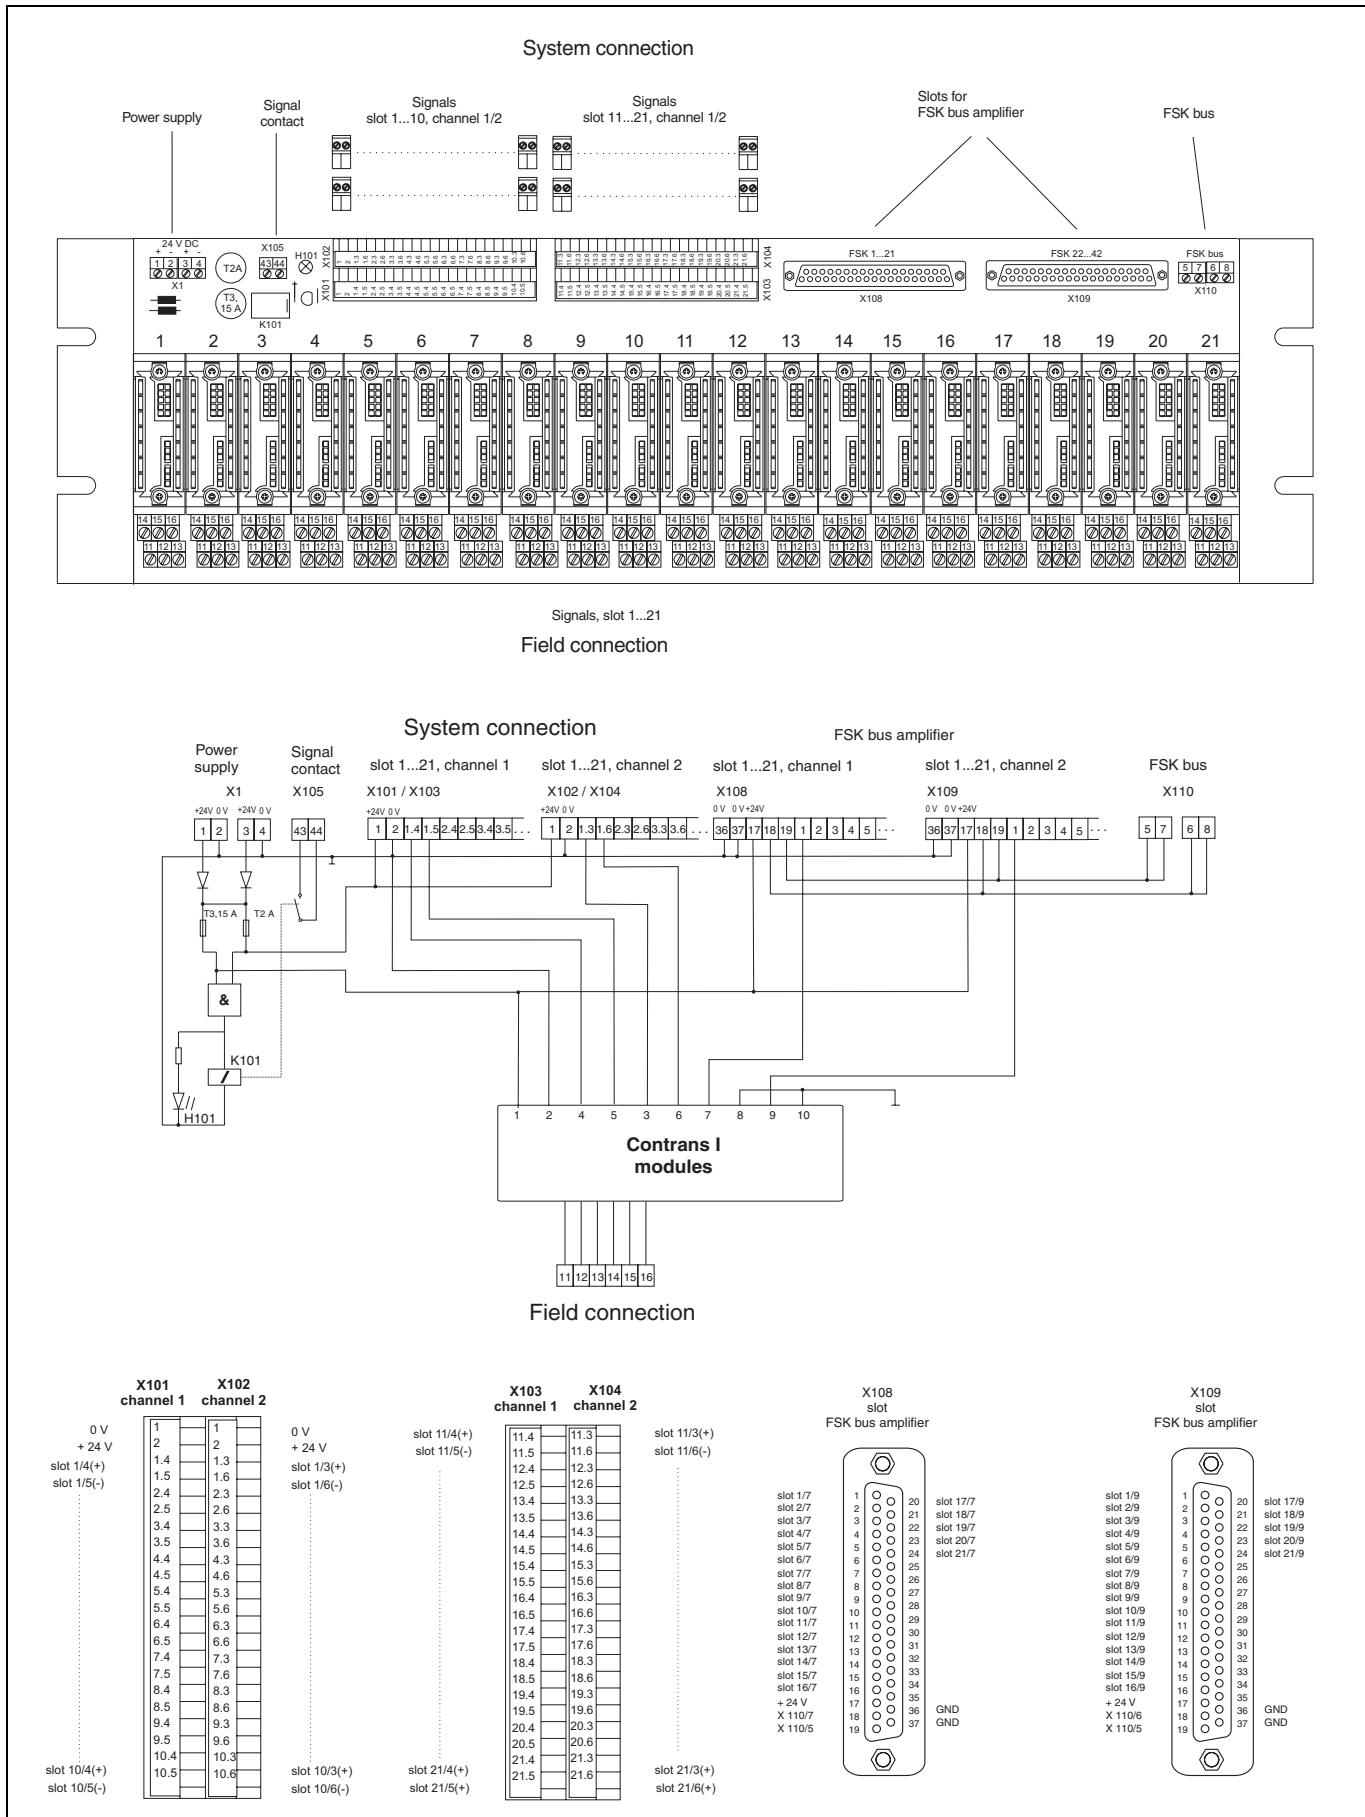

## Dimensional drawings

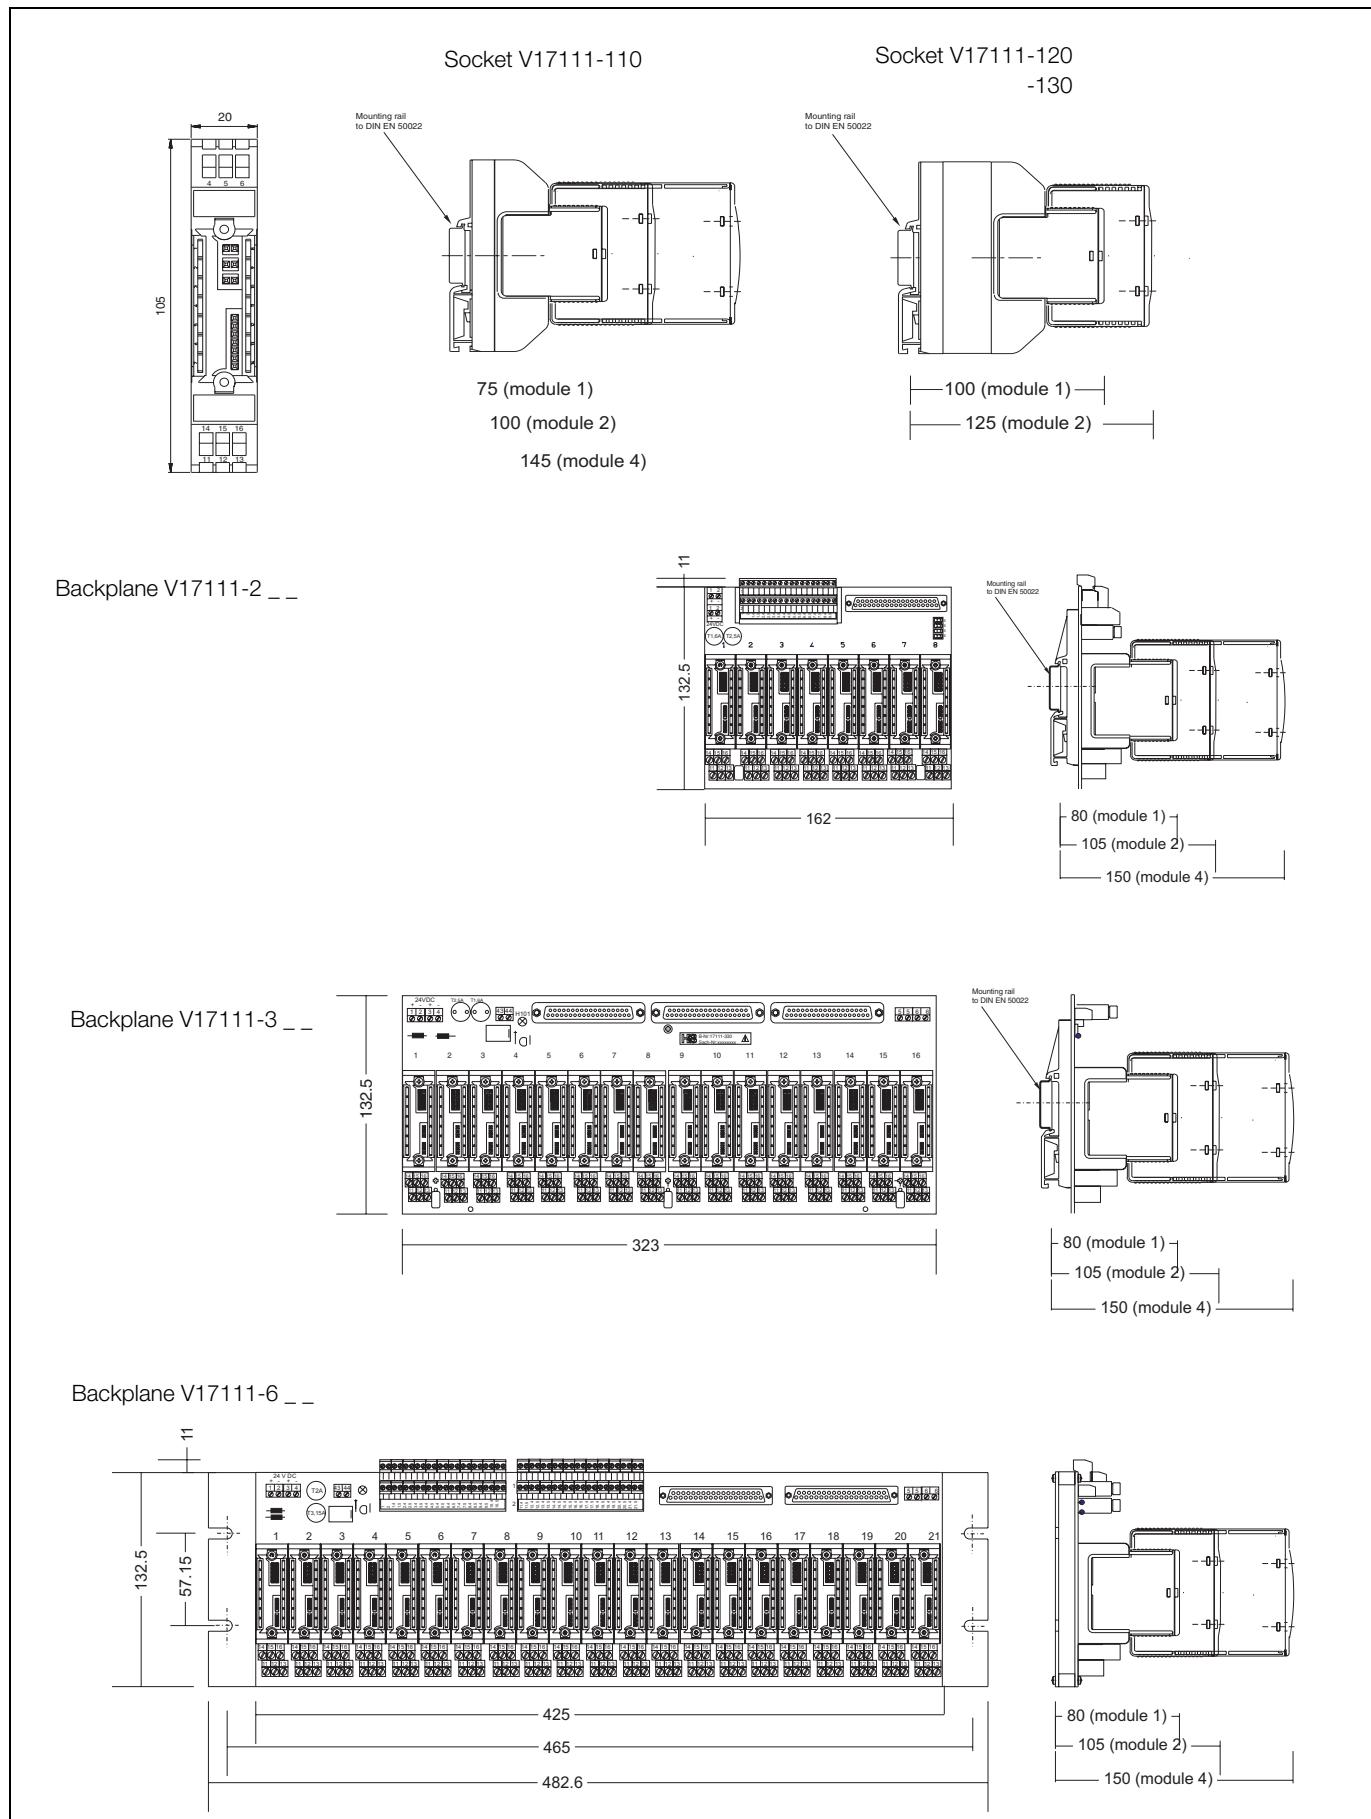


## **Accessories**

---



### **Accessories**




|  |                               |                        |
|--|-------------------------------|------------------------|
| Cross Wiring Module  | .....                         | V17191-110             |
| Straight Through Module  | .....                         | V17191-120             |
| FSK Bus Amplifier  | 16, 21, 32 channels .....     | V17191-160, -210, -320 |
| System Cables  | SUB D connector, single ..... | 0336935V               |
| Power Supply   | .....                         | V17212-1_0             |
| Device Management Tool SV401 (SMART VISION) (see data sheet 10/63-1.20 EN) |                               |                        |
| HART PC adapter (see data sheet 10/63-6.71 EN)                             |                               |                        |

- Connection multiplication
  - Various types of cabling
  - Routing of incoming and outgoing lines
  - Separation between intrinsically safe and non-intrinsically safe circuits

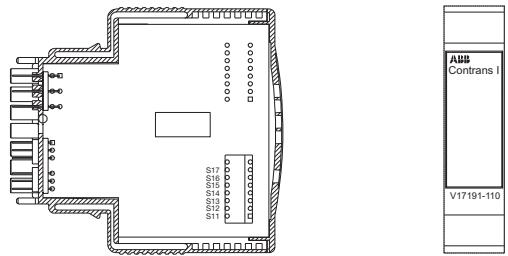

Module size 2
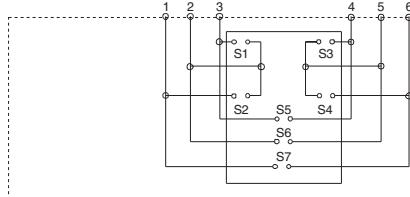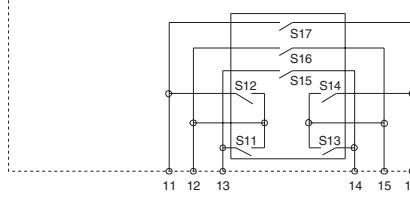
|               |   |   |                  |
|---------------|---|---|------------------|
| <b>Input</b>  |   |    | Module fits for: |
| Connection    | Terminals 12, 13, 14, 15, 16  | Socket  | Backplane        |
|               | intrinsically safe and  | V17111-100  | V17111-2 _ _     |
|               | non-intrinsically safe circuits   | V17111-110  | V17111-3 _ _     |
| Routing       | DIP switches S11...S17  | V17111-120  | V17111-6 _ _     |
| <b>Output</b> |  | V17111-130  |                  |
| Connection    | Terminals 1, 2, 3, 4, 5, 6  |   |                  |
|               | non-intrinsically safe circuits   |   |                  |
| Routing       | jumpers S1...S7   |   |                  |
|               |   | <br> |                  |

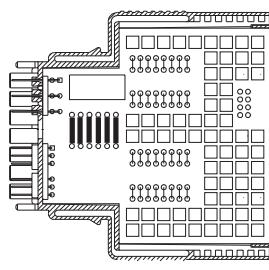

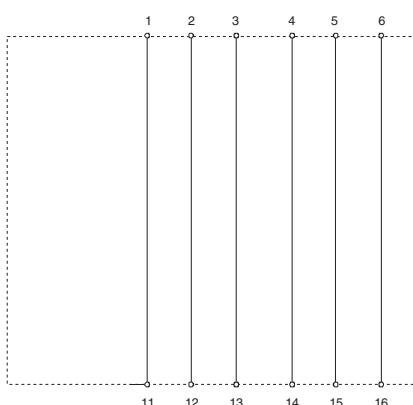
| <ul style="list-style-type: none"> <li>• Plug-in modules for testing (straight-through)</li> <li>• User-specific application through universal circuit board</li> <li>• Not suitable for intrinsically safe applications</li> </ul> | <br> <p style="text-align: right;">Module size 2</p>  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
|---|--|--------|-----------|------------|---|------------|---|------------|---|------------|---|--------------|---|--------------|---|--------------|---|
| <b>Input</b><br><br>Connection Terminals 12, 13, 14, 15, 16  | Module fits for:<br><table> <thead> <tr> <th>Socket</th> <th>Backplane</th> </tr> </thead> <tbody> <tr> <td>V17111-100</td> <td>●</td> </tr> <tr> <td>V17111-110</td> <td>●</td> </tr> <tr> <td>V17111-120</td> <td>●</td> </tr> <tr> <td>V17111-130</td> <td>●</td> </tr> <tr> <td>V17111-2 _ _</td> <td>●</td> </tr> <tr> <td>V17111-3 _ _</td> <td>●</td> </tr> <tr> <td>V17111-6 _ _</td> <td>●</td> </tr> </tbody> </table> | Socket | Backplane | V17111-100 | ● | V17111-110 | ● | V17111-120 | ● | V17111-130 | ● | V17111-2 _ _ | ● | V17111-3 _ _ | ● | V17111-6 _ _ | ● |
| Socket  | Backplane  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-100  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-110  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-120  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-130  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-2 _ _  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-3 _ _  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| V17111-6 _ _  | ●  |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |
| <b>Output</b><br><br>Connection Terminals 1, 2, 3, 4, 5, 6   |   |        |           |            |   |            |   |            |   |            |   |              |   |              |   |              |   |




# FSK Bus Amplifier

16, 21, 32 channels

V17191-160, -210, -320
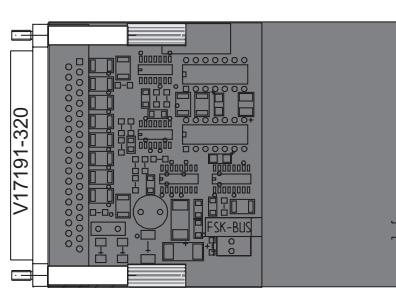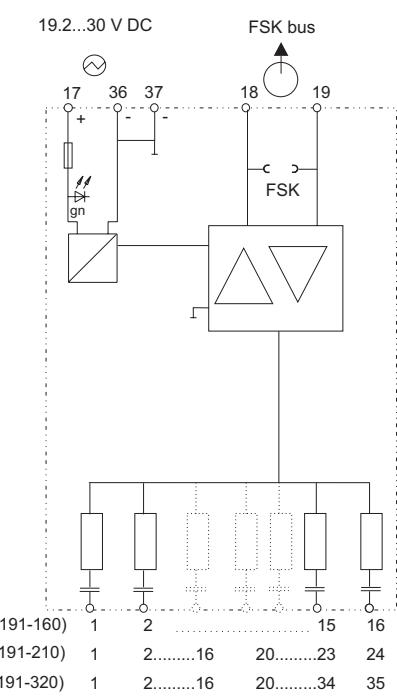
|  |  |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
|--|--|--|--------------|------------------------------|--------------|------------------------------|----------|------------|--|-------------|------------------------|--|---------|------------------------------|--------------------------|--------------|--------|------|------------|----------------------|---------------|----------------|-------------------|---------------|--|
| <ul style="list-style-type: none"> <li><b>FSK bus design Contrans I modules on standard backplane</b></li> <li><b>Bidirectional transmission of FSK signals according to HART protocol</b></li> <li><b>Cost-effective centralized operation</b></li> <li><b>Communication with intelligent field units via SMART VISION software</b></li> </ul>  |   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| <p><b>Output (FSK bus)</b></p> <table border="1"> <tr> <td>Interconnection per FSK bus</td> <td>max. 30 FSK bus amplifier<br/>(max. 15 FSK bus amplifier<br/>V17191-320)</td> </tr> <tr> <td>Signal level</td> <td>min. 140 mVss...2.0 Vss max.</td> </tr> </table> <p><b>Input</b></p> <table border="1"> <tr> <td>Signal level</td> <td>min. 140 mVss...2.0 Vss max.</td> </tr> <tr> <td>Baudrate</td> <td>1200 bit/s</td> </tr> </table> <p><b>General data</b></p> <table border="1"> <tr> <td>Line length<br/>(completely project incl. cable to transmitter)</td> <td>max. 1000 m</td> </tr> <tr> <td>Transmission frequency</td> <td>logical 1: 1200 Hz ± 1 %<br/>logical 0: 2200 Hz ± 1 %</td> </tr> <tr> <td>Display</td> <td>green LED, power supply „On“</td> </tr> <tr> <td>Max. ambient temperature</td> <td>-20...+60 °C</td> </tr> <tr> <td>Weight</td> <td>90 g</td> </tr> </table> <p><b>Power supply</b></p> <table border="1"> <tr> <td>Connection</td> <td>Terminals 1(+); 2(-)</td> </tr> <tr> <td>Rated voltage</td> <td>19.2...30 V DC</td> </tr> <tr> <td>Power consumption</td> <td>approx. 0.8 W</td> </tr> </table> | Interconnection per FSK bus  | max. 30 FSK bus amplifier<br>(max. 15 FSK bus amplifier<br>V17191-320) | Signal level | min. 140 mVss...2.0 Vss max. | Signal level | min. 140 mVss...2.0 Vss max. | Baudrate | 1200 bit/s | Line length<br>(completely project incl. cable to transmitter) | max. 1000 m | Transmission frequency | logical 1: 1200 Hz ± 1 %<br>logical 0: 2200 Hz ± 1 % | Display | green LED, power supply „On“ | Max. ambient temperature | -20...+60 °C | Weight | 90 g | Connection | Terminals 1(+); 2(-) | Rated voltage | 19.2...30 V DC | Power consumption | approx. 0.8 W |  <p><b>Notice:</b><br/>The FSK bus is operated with the help of the SMART VISION software. Field units which are to be participated on the FSK bus are addressed via a bus code. During the first commissioning, it must be ensured that the bus code has been set to point operation. This means connecting the modem to the terminals of the respective Contrans I module. For the point to point operation mode, the connection to the FSK bus must be interrupted (pull out the FSK bus amplifier).</p> <p>Accessories for the FSK bus communication:</p> <ul style="list-style-type: none"> <li>- Personal computer with SMART VISION software of the connected field unit</li> <li>- FSK-Modem II-Ex with connecting cable, Catalog No. 63671-9790026</li> <li>- FSK-Modem II with connecting cable, Catalog No. 11589-7957838</li> </ul> <p>Technical data see data sheet 10/63-6.71 EN</p> |
| Interconnection per FSK bus  | max. 30 FSK bus amplifier<br>(max. 15 FSK bus amplifier<br>V17191-320)   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Signal level   | min. 140 mVss...2.0 Vss max.   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Signal level   | min. 140 mVss...2.0 Vss max.   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Baudrate   | 1200 bit/s   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Line length<br>(completely project incl. cable to transmitter)   | max. 1000 m  |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Transmission frequency   | logical 1: 1200 Hz ± 1 %<br>logical 0: 2200 Hz ± 1 %   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Display  | green LED, power supply „On“   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Max. ambient temperature   | -20...+60 °C   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Weight   | 90 g   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Connection   | Terminals 1(+); 2(-)   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Rated voltage  | 19.2...30 V DC   |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |
| Power consumption  | approx. 0.8 W  |  |              |                              |              |                              |          |            |  |             |                        |  |         |                              |                          |              |        |      |            |                      |               |                |                   |               |  |

Contrans I modules




**FSK Bus Amplifier**

16, 21, 32 channels

**V17191-160, -210, -320**

| Ordering information     | Catalog No. |
|--------------------------|-------------|
| <b>FSK bus amplifier</b> | V17191-___  |
| 16 channels              | 160         |
| 21 channels              | 210         |
| 32 channels              | 320         |

Cables with shield 20 x 2 x 0,14-SN-GR


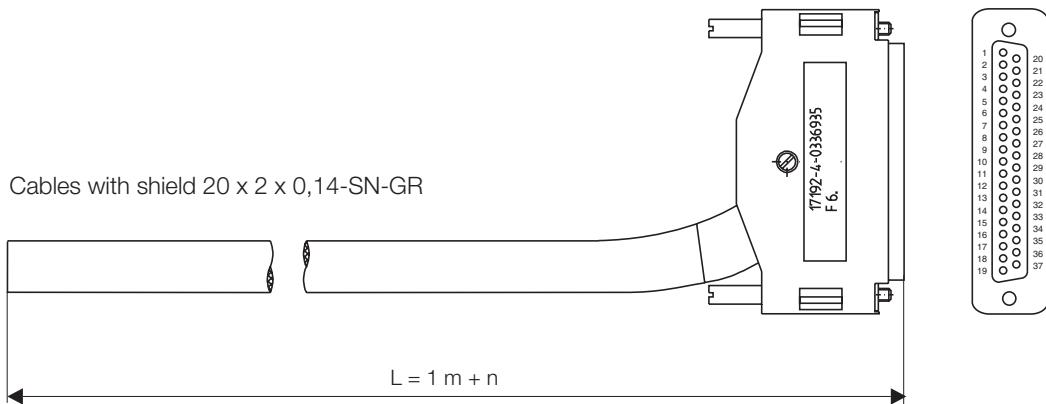
**Pinout**

| <u>Cables</u>        | <u>ERNI plug</u> |           |  | <u>Cables</u> | <u>ERNI plug</u> |  |            |
|----------------------|------------------|-----------|--|---------------|------------------|--|------------|
| green-black          | 17               | 24 V+     |  | white-grey    | 9                |  | channel 9  |
| yellow-black         | 36               | 0 V       |  | grey-brown    | 28               |  |            |
| grey-blue            | 37               | 0 V       |  | white-pink    | 10               |  | channel 10 |
| white                | 1                |           |  | pink-brown    | 29               |  |            |
| brown                | 20               | channel 1 |  | white-blue    | 11               |  | channel 11 |
| green                | 2                |           |  | brown-blue    | 30               |  |            |
| yellow               | 21               | channel 2 |  | white-red     | 12               |  | channel 12 |
| grey                 | 3                |           |  | brown-red     | 31               |  |            |
| pink                 | 22               | channel 3 |  | white-black   | 13               |  | channel 13 |
| blue                 | 4                |           |  | brown-black   | 32               |  |            |
| red                  | 23               | channel 4 |  | grey-green    | 14               |  | channel 14 |
| black                | 5                |           |  | yellow-grey   | 33               |  |            |
| violet               | 24               | channel 5 |  | pink-green    | 15               |  | channel 15 |
| grey-pink            | 6                |           |  | yellow-pink   | 34               |  |            |
| red-blue             | 25               | channel 6 |  | green-blue    | 16               |  | channel 16 |
| white-green          | 7                |           |  | yellow-blue   | 35               |  |            |
| brown-green          | 26               | channel 7 |  | green-red     | 18               |  |            |
| white-yellow         | 8                |           |  | yellow-red    | 19               |  |            |
| yellow-brown         | 27               | channel 8 |  | pink-blue     | free             |  |            |
|                      |                  |           |  | grey-red      | free             |  |            |
|                      |                  |           |  | pink-red      | free             |  |            |
| Don't connect shield |                  |           |  |               |                  |  |            |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• Power supply for Contrans I modules</li> <li>• Termination at front</li> <li>• Top-hat rail mounting</li> </ul> |   |
| <b>Input</b>   |                            |
| Input voltage  | 115/230 V AC +15 %, -20 %<br>selectable   |
| Alternating voltage  | 47...63 Hz; 1.3/0.7 A   |
| Direct voltage   | 100...375 V DC at 50 % output current   |
| External circuit breaker   | 10 A (characteristic B proposed)  |
| Internal fuse  | not reachable   |
| <b>Output</b>  |                            |
| Rated voltage  | 24 V DC +5 %; -1 %  |
| Type   | output current<br>at 196 V AC   |
| V17212-110   | 2.5 A > 20 ms   |
| V17212-120   | 5 A > 37 ms   |
| V17212-130   | 10 A > 20 ms  |
| Tolerance  | better than 1 %   |
| Residual ripple  | < 25 mV (peak-to-peak)<br>open and short-circuit proof  |
| "Equipment on" indicator lamp  | green, on the front panel<br>is extinguished when the output voltage falls<br>below 12 V                    |
| <b>General data</b>  |   |
| LED display  | Power "On" (green)  |
|  | LED switch off at < 12 V output voltage   |
| Electrical connections   | Screw terminals at front, input at bottom,<br>output at top   |
| Type of protection   | IP 20   |
| Distance between 2 supplies  | approx. 25 mm   |
| Mounting type  | at 35 mm DIN rail, acc. DIN EN 50 022   |
| Weight   |   |
| Type V17212-110  | 406 g   |
| Type V17212-120  | 620 g   |
| Type V17212-130  | 1050 g  |
| <b>Performance under reference conditions</b>  |   |
| Max. ambient temperature   | -10...+60 °C<br>the device should only be switched on with a<br>higher device temperature of 0 °C or higher |



Dimensional drawings (dimensions in mm)

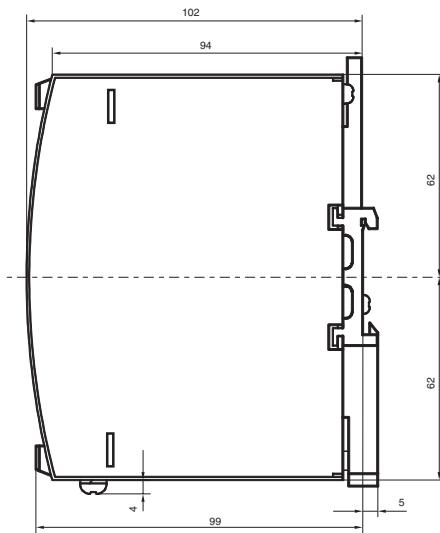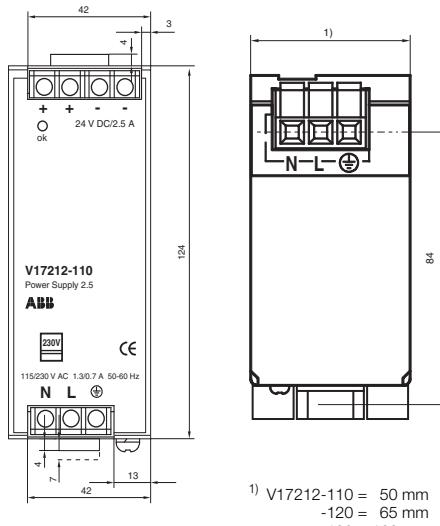

### Input Isolators, 19"

|                                |                                       |                 |
|--------------------------------|---------------------------------------|-----------------|
| Isolating Power Supply, 19"    | 1 channel, HART, FSK bus .....        | V17151-32019_-- |
| Isolating Power Supply, 19"    | 2 channels, HART .....                | V17151-34019_0  |
| Input Isolator, 19"            | 1 channel, HART, point-to-point ..... | V17151-42019_0  |
| Input Isolator, universal, 19" | 1 channel, V, mA .....                | V17151-48019_0  |
| Isolating Power Supply Ex, 19" | 1 channel, HART, FSK bus .....        | V17151-72019_-- |
| Isolating Power Supply Ex, 19" | 2 channels, HART .....                | V17151-74019_0  |

### 19" technology

Although the 19" world is regarded as obsolete by many people, ABB supports this technology, since it is a reliable means of electrical isolation between the hazardous and non-hazardous area for control signal transmission

The modules/instruments easily plug in 19" sub-racks and cannot be mixed up as this is prevented by special coding pins on the boards. 19" units are always installed outside the hazardous area.

The 19" technology described in this document is based on the well-proven functionality of the ABB Contrans I system. A special adapter board adapts the Contrans I module pinning to that of the standard 19" blade-contact connector.

The electronic connections are realized via a 32-pin blade-contact connector in accordance with DIN 41612, Type D or F.

The standard terminal assignment of Type F is d and z, that of Type D is c and a. The size is the same as that of a standard Euroboard (100 mm x 160 mm, to DIN 41494), with a 4 TE (20.32 mm) front panel.

The functional and safety-relevant specifications are the same as for the Contrans I system.

Ordering code for V17151-32019\_-- and V17151-72019\_--




**V17151-32019** \_--

- \_1 replaces TZN124/TZN129, single-chann.
- \_2 replaces TZN 128
- \_1 \_ 24 V power supply
- \_2 \_ 230 V power supply (under preparation)
- 1 \_ \_ blade-contact connector, type F
- 2 \_ \_ blade-contact connector, type D

# Isolating Power Supply, 19"

V17151-32019


1 channel, HART, FSK bus
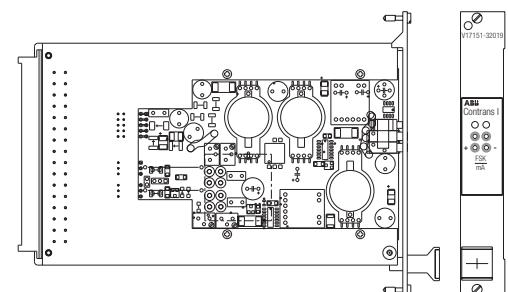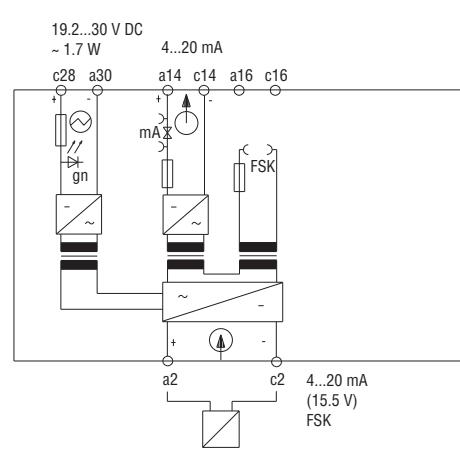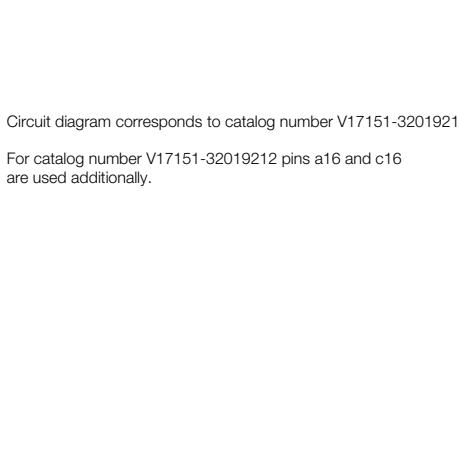
|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Power supply for loop powered HART transmitters</li> <li>• FSK bus communication<sup>1)</sup></li> <li>• Electrical isolation between input/output/power supply and HART</li> <li>• Testjacks for mA signal and HART communication</li> <li>• Output signal free of HART signal</li> </ul> |    |
| <b>Output</b>   |   |
| Output current (short-circuit proof) 4...20 mA<br>Transformation ratio 1:1<br>Detect. of wire break (input) < 0.1 mA<br>Detect. of short-circuit (input, approx.) 23...28 mA<br>Load 0...600 Ω<br>Residual ripple (peak-to-peak) < 0.25 %   |  |
| <b>Communication</b>  |  |
| via FSK bus <sup>1)</sup><br>via jacks 2 x 2 mm (front)<br>Permeable protocol HART<br>Bandwidth 500 Hz...10 kHz   |  |
| <b>Input</b>  |  |
| Input current 4...20 mA<br>Supply voltage at 20/22 mA ≥ 15.5/14.8 V<br>Short circuit current 23...28 mA<br>Residual ripple (peak-to-peak) < 100 mV  |  |
| <b>General data</b>   |  |
| LED indicators, power "On" (green)  |  |
| <b>Isolation</b>  |  |
| Input – output/power supply/FSK 2.3 kV<br>Output – power supply – FSK 500 V<br>Max. ambient temperature -20...+60 °C<br>Weight 120 g  |  |
| <b>Power supply</b>   |  |
| Rated voltage 19.2...30 V DC<br>Power consumption 1.7 W<br>Power dissipation 1.4 W  |  |
| <b>Performance under reference conditions</b>   |  |
| Linearity deviation < 0.1 %<br>Error limit < 0.25 %<br>Temperature effect < 0.1 %/10 K<br>Impedance effect < 0.05 %<br>Response time < 50 ms  |  |
| <b>Ordering information</b>   |  |
| <b>V17151-32019</b>   | <sup>1)</sup> only with catalog number V17151-32019_2                                |
| 1 __ blade-contact connector, type F<br>2 __ blade-contact connector, type D<br>_ 1 _ 24 V power supply<br>_ 2 _ 230 V power supply (under preparation)<br>_ _ 1 replaces TZN 124 and TZN 129, single-channel<br>_ _ 2 replaces TZN 128   |  |


<sup>1)</sup> only with catalog number V17151-32019\_2

2 channels, HART

- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

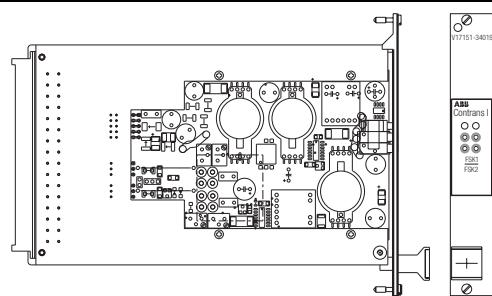

| <b>Output</b> per channel                     |  |
|---|--|
| Output current (short-circuit proof)          | 4...20 mA                              |
| Transformation ratio                          | 1:1                                    |
| Detect. of wire break (input)                 | < 0.1 mA                               |
| Detect. of short-circuit (input, approx.)     | 23...28 mA                             |
| Load  | 0..600 $\Omega$                        |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |
| <b>Communication</b> per channel              |  |
| via jacks 2 x 2 mm (front)                    |  |
| Permeable protocol                            | HART                                   |
| Bandwidth                                     | 500 Hz...10 kHz                        |
| <b>Input</b> per channel                      |  |
| Input current                                 | 4...20 mA                              |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V                     |
| Short circuit current                         | 23...28 mA                             |
| Residual ripple (peak-to-peak)                | < 100 mV                               |
| <b>General data</b>                           |  |
| LED indicators, power "On" (green)            |  |
| <b>Isolation</b> per channel                  |  |
| Input – output/power supply/FSK               | 2.3 kV                                 |
| Output – power supply – FSK                   | 500 V                                  |
| <b>Isolation</b> channel 1 – channel 2        |  |
| Input 1 – input 2                             | 500 V                                  |
| Output 1 – output 2                           | 500 V                                  |
| Max. ambient temperature                      | -20...+60 °C                           |
| Weight  | 140 g                                  |
| <b>Power supply</b>                           |  |
| Rated voltage                                 | 19.2...30 V DC                         |
| Power consumption                             | 3.1 W                                  |
| Power dissipation                             | 2.45 W                                 |
| <b>Performance under reference conditions</b> |  |
| Linearity deviation                           | < 0.1 %                                |
| Error limit                                   | < 0.25 %                               |
| Temperature effect                            | < 0.1 %/10 K                           |
| Impedance effect                              | < 0.05 %                               |
| Response time                                 | < 50 ms                                |
| <b>Ordering information</b>                   |  |
| <b>V17151-34019_0</b>                         |  |
| 1 _ _   | blade-contact connector, type F        |
| 2 _ _   | blade-contact connector, type D        |
| _ 1 _   | 24 V power supply                      |
| _ 2 _   | 230 V power supply (under preparation) |

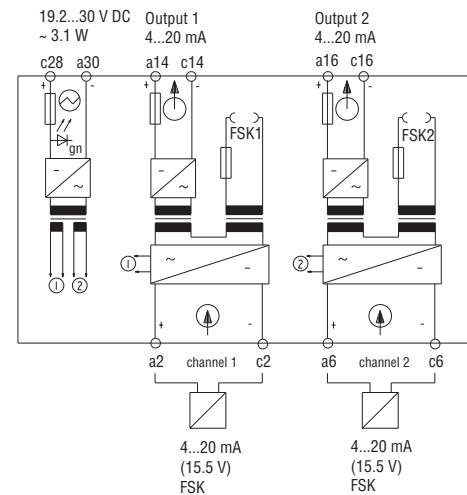

Circuit diagram corresponds to catalog number V17151-34019210.

# Input Isolator, 19"


1 channel, HART, point-to-point

V17151-42019\_0


|   |   |
|---|---|
| <ul style="list-style-type: none"> <li><b>Input isolator for extra powered HART transmitters (Flowmeters)</b></li> <li><b>Electrical isolation between input/output/power supply and HART</b></li> <li><b>Testjacks for mA signal and HART communication</b></li> <li><b>Output signal free of HART signal</b></li> </ul> |   |
| <b>Output</b><br><br>Output current (short-circuit proof) 4...20 mA<br>Transformation ratio 1:1<br>Detect. of wire break (input) < 0.1 mA<br>Detect. of overranging (input, approx.) 23...28 mA<br>Load 0...600 Ω<br>Residual ripple (peak-to-peak) < 0.25 %  |   |
| <b>Communication</b><br>via jacks 2 x 2 mm (front)<br>Permeable protocol HART<br>Bandwidth 500 Hz...10 kHz  |   |
| <b>Input</b><br><br>Input current 4...20 mA<br>Voltage drop in input < 2 V  |   |
| <b>General data</b><br>LED indicators, power "On" (green)   |   |
| <b>Isolation</b><br>Input – output/power supply/FSK 2.3 kV<br>Output – power supply – FSK 500 V<br>Max. ambient temperature -20...+60 °C<br>Weight 120 g  |   |
| <b>Power supply</b><br><br>Rated voltage 19.2...30 V DC<br>Power consumption 1.1 W<br>Power dissipation 1.1 W   |   |
| <b>Performance under reference conditions</b><br>Linearity deviation < 0.1 %<br>Error limit < 0.25 %<br>Temperature effect < 0.1 %/10 K<br>Impedance effect < 0.05 %<br>Response time < 50 ms   |   |
| <b>Ordering information</b><br><b>V17151-42019_0</b><br>1 __ blade-contact connector, type F<br>2 __ blade-contact connector, type D<br>_ 1 _ 24 V power supply<br>_ 2 _ 230 V power supply (under preparation)   | <p>Circuit diagram corresponds to catalog number V17151-42019210.</p> |

1 channel, V, mA

- Input isolator for direct current or direct voltage signals
- Setting of the input and output ranges with DIP switches

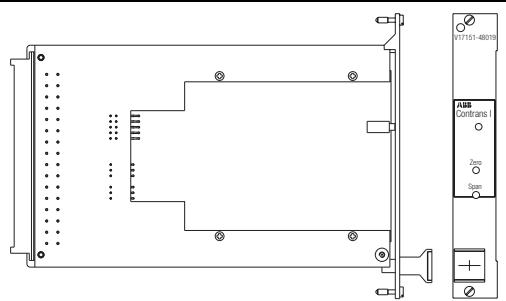

| <b>Output</b>                    |  |
|----------------------------------|--|
| Current                          | 20 mA uni-/bipolar; 4...20 mA  |
| Voltage                          | 5 V, 10 V uni-/bipolar;<br>1...5 V, 2...10 V   |
| Offset off output span of select | -100%, -50%, 0%, 50%, 100%   |
| Load at 20 mA                    | $\leq 600 \Omega$  |
| Load at 10 V                     | $\geq 1 \text{ k}\Omega$   |
| Offset error                     | < 20 $\mu\text{A}$ / $< 10 \text{ mV}$   |
| Residual ripple (effective)      | < 10 mV  |
| <b>Input</b>                     |  |
| Measurement                      | 0.1...100 mA; 20 mV...200 V  |
| Measur. range                    | $\leq 5 \text{ mA}$ $> 5 \text{ mA}$ $\leq 500 \text{ mV}$ $> 500 \text{ mV}$        |
| Input resistance approx.         | 100 $\Omega$ 5 $\Omega$ 1 M $\Omega$ 1 M $\Omega$                                    |
| Overload                         | $\leq 100 \text{ mA}$ $\leq 300 \text{ mA}$ $\leq 20 \text{ mA}$ $\leq 3 \text{ mA}$ |
| Adjustment range ZERO pot        | $\pm 25 \%$ of the output range  |
| Adjustment range SPAN pot        | 0.3...3.30 from the final value<br>of the input range                                |
| Bandwidth                        | >10 kHz, < 10 Hz, adjustable   |

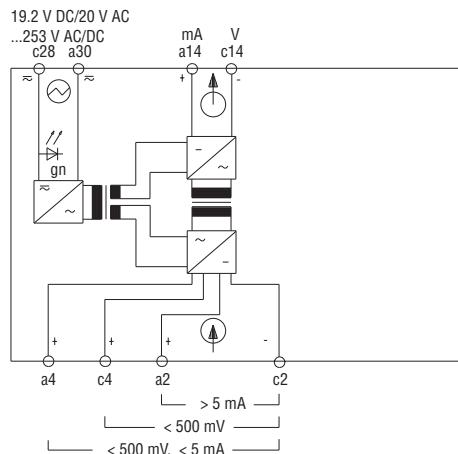

Circuit diagram corresponds to catalog number V17151-48019210.

### General data

LED indicator, power "On" (green)

### Isolation

|                          |              |
|--------------------------|--------------|
| Input – output           | 2.3 kV       |
| Output – power supply    | 2.3 kV       |
| Max. ambient temperature | -20...+60 °C |
| Weight                   | 120 g        |

### Power supply

|                   |                               |
|-------------------|-------------------------------|
| Rated voltage     | 19.2...30 V                   |
| Power consumption | 2 VA AC, 48...62 Hz, 0.9 W DC |

### Characteristics under reference conditions

|                    |                             |
|--------------------|-----------------------------|
| Error limit        | < 0.1 % from final value    |
| Temperature effect | < 60 ppm/K from final value |

### Ordering information

#### V17151-48019\_0

- 1 \_\_ blade-contact connector, type F
- 2 \_\_ blade-contact connector, type D
- \_ 1 \_ 24 V power supply
- \_ 2 \_ 230 V power supply (under preparation)

**Settings DIP counter:**

| Input ranges                                       |   | Input settings |   |   |   |      |   |   |   |   |      |
|--|---|----------------|---|---|---|------|---|---|---|---|------|
|  |   | S1             |   |   |   | S2   |   |   |   |   |      |
| Switch   |   | 1              | 2 | 3 | 4 | 5-10 | 1 | 2 | 3 | 4 | 5-10 |
| Range  |   |                |   |   |   | X    |   |   |   | ● | X    |
| 0...±60 mV   |   |                |   |   |   |      |   |   |   |   |      |
| 0...±100 mV  | ● |                |   |   |   | X    |   |   |   | ● | X    |
| 0...±150 mV  |   | ●              |   |   |   | X    |   |   |   | ● | X    |
| 0...±300 mV  | ● | ●              |   |   |   | X    |   |   |   | ● | X    |
| 0...±500 mV  |   | ●              | ● |   |   | X    |   |   |   | ● | X    |
| 0...±1 V   | ● | ●              |   |   |   | X    | ● |   |   | ● | X    |
| 0...±5 V   |   | ●              | ● | ● |   | X    | ● |   |   | ● | X    |
| 0...±10 V  | ● | ●              | ● | ● |   | X    | ● |   |   | ● | X    |
| 0...±100 V   |   |                |   | ● | X |      | ● | ● | X |   |      |
| 0...±0.3 mA  | ● |                |   | ● | X | ●    |   |   |   | ● | X    |
| 0...±1 mA  |   | ●              |   | ● | X | ●    |   |   |   | ● | X    |
| 0...±5 mA  | ● | ●              |   | ● | X | ●    |   |   |   | ● | X    |
| 0...±10 mA   |   | ●              | ● | ● | X | ●    |   |   |   | ● | X    |
| 0...±20 mA   | ● | ●              | ● | ● | X | ●    |   |   |   | ● | X    |
| 0...±50 mA   |   | ●              | ● | ● | ● | X    | ● |   |   | ● | X    |
| ○ 0...20 mA  | ● | ●              | ● | ● | X | ●    |   |   |   | ● | X    |
| Variable with SPAN Pot:<br>30...330% of sel. range | X | X              | X | X | X | X    | X | X | X |   | X    |

| Output ranges, displacement and limit frequency/damping |   | Output settings |   |   |    |      |   |   |   |
|---|---|-----------------|---|---|----|------|---|---|---|
|   |   | S1              |   |   |    | S3   |   |   |   |
| Switch  |   | 1               | 2 | 3 | 4  | 8-10 | 1 | 2 | 3 |
| Range   |   | 1-4             | 2 | 3 | 4  | 8-10 | 1 | 2 | 3 |
| 0...±10 V   |   | X               |   |   |    | X    | ● | ● | X |
| 2...10 V  |   | X               | ● |   |    | X    | ● | ● | X |
| 0...±5 V  |   | X               |   | ● |    | X    | ● | ● | X |
| 1...5 V   |   | X               | ● | ● |    | X    | ● | ● | X |
| 0...±20 mA  |   | X               |   |   |    | ●    | X |   |   |
| ○ 4...20 mA   | X | ●               |   | ● | X  |      |   |   | X |
| Switch  |   | S1              |   |   |    | S2   |   |   |   |
| Offset  |   | 1-7             | 8 | 9 | 10 | 1-3  | 4 | 5 |   |
| ○ 0 %   |   | X               |   |   |    | X    | X | ● |   |
| -100 %  |   | X               | ● |   |    | X    | X | ● |   |
| -50 %   |   | X               |   | ● |    | X    | X | ● |   |
| +50 %   |   | X               | ● | ● |    | X    | X | ● |   |
| +100 %  |   | X               |   |   | ●  | X    | X | ● |   |
| Variable with ZERO Pot:<br>0...±25% of span             |   | X               | X | X | X  | X    | X |   |   |
| Switch  |   | S3              |   |   |    |      |   |   |   |
| Bandwidth   |   | 1-2             | 3 |   |    |      |   |   |   |
| ○ 10 kHz  |   | X               |   |   |    |      |   |   |   |
| 10 Hz   |   | X               | ● |   |    |      |   |   |   |


**Warning:**

Do not configure the module under power!


When making the fine adjustment, use a screw driver that is safely isolated from the input voltage for setting the potentiometer!



- Power supply for loop powered HART transmitters
- FSK bus communication<sup>1)</sup>
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal and HART communication
- Output signal free of HART signal

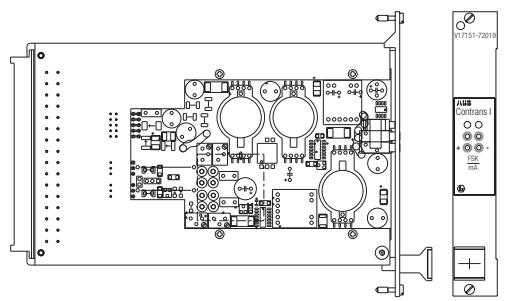

| <b>Output</b>                                 |   |
|---|---|
| Output current (short-circuit proof)          | 4...20 mA   |
| Transformation ratio                          | 1:1   |
| Detect. of wire break (input)                 | < 0.1 mA  |
| Detect. of short-circuit (input, approx.)     | 23...28 mA  |
| Load  | 0...600 $\Omega$                                  |
| Residual ripple (peak-to-peak)                | < 0.25 %  |
| <b>Communication</b>                          |   |
| via FSK bus <sup>1)</sup>                     |   |
| via jacks 2 x 2 mm (front)                    |   |
| Permeable protocol                            | HART  |
| Bandwidth                                     | 500 Hz...10 kHz                                   |
| <b>Input</b>                                  |   |
| Input current                                 | 4...20 mA   |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V                                |
| Short circuit current                         | 23...28 mA  |
| Residual ripple (peak-to-peak)                | < 100 mV  |
| <b>Explosion protection</b>                   |   |
| Certificate of conformity                     | PTB 98 ATEX 2183 X                                |
| Max. short-circuit current                    | $I_o = 93$ mA                                     |
| Max. voltage                                  | $U_o = 26.3$ V                                    |
| Max. power                                    | $P_o = 610$ mW                                    |
| Permitted external inductance                 | $L_a = 4.1$ mH                                    |
| Permitted external capacitance                | $C_a = 97$ nF                                     |
| <b>General data</b>                           |   |
| LED indicators, power "On" (green)            |   |
| <b>Isolation</b>                              |   |
| Input – output/power supply/FSK               | 2.3 kV  |
| Output – power supply – FSK                   | 500 V   |
| Max. ambient temperature                      | -20...+60 °C                                      |
| Weight  | 120 g   |
| <b>Power supply</b>                           |   |
| Rated voltage                                 | 19.2...30 V DC                                    |
| Power consumption                             | 1.7 W   |
| Power dissipation                             | 1.4 W   |
| <b>Performance under reference conditions</b> |   |
| Linearity deviation                           | < 0.1 %   |
| Error limit                                   | < 0.25 %  |
| Temperature effect                            | < 0.1 %/10 K                                      |
| Impedance effect                              | < 0.05 %  |
| Response time                                 | < 50 ms   |
| <b>Ordering information</b>                   |   |
| V17151-72019                                  |   |
| 1   | blade-contact connector, type F                   |
| 2   | blade-contact connector, type D                   |
| _ 1   | 24 V power supply                                 |
| _ 2   | 230 V power supply (under preparation)            |
| _ _ 1   | replaces TZN 124 and TZN 129, single-channel (Ex) |
| _ _ 2   | replaces TZN 128 (Ex)                             |

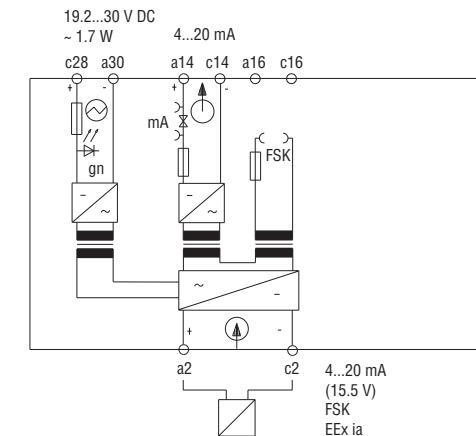


Circuit diagram corresponds to catalog number V17151-72019211.


For catalog number V17151-72019212 pins a16 and c16 are used additionally.



- Power supply for loop powered HART transmitters
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication
- Output signal free of HART signal

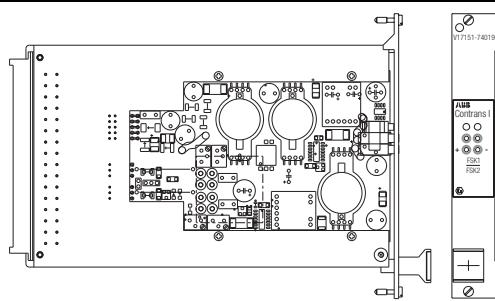

| <b>Output</b> per channel                     |  |
|---|--|
| Output current (short-circuit proof)          | 4...20 mA                              |
| Transformation ratio                          | 1:1                                    |
| Detect. of wire break (input)                 | < 0.1 mA                               |
| Detect. of short-circuit (input, approx.)     | 23...28 mA                             |
| Load  | 0..600 $\Omega$                        |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |
| <b>Communication</b> per channel              |  |
| via jacks 2 x 2 mm (front)                    |  |
| Permeable protocol                            | HART                                   |
| Bandwidth                                     | 500 Hz...10 kHz                        |
| <b>Input</b> per channel                      |  |
| Input current                                 | 4...20 mA                              |
| Supply voltage at 20/22 mA                    | $\geq 15.5/14.8$ V                     |
| Short circuit current                         | 23...28 mA                             |
| Residual ripple (peak-to-peak)                | < 100 mV                               |
| <b>Explosion protection</b>                   |  |
| Certificate of conformity                     | PTB 98 ATEX 2183 X                     |
| Max. short-circuit current                    | $I_o = 93$ mA                          |
| Max. voltage                                  | $U_o = 26.3$ V                         |
| Max. power                                    | $P_o = 610$ mW                         |
| Permitted external inductance                 | $L_a = 4.1$ mH                         |
| Permitted external capacitance                | $C_a = 97$ nF                          |
| <b>General data</b>                           |  |
| LED indicators, power "On" (green)            |  |
| <b>Isolation</b> per channel                  |  |
| Input – output/power supply/FSK               | 2.3 kV                                 |
| Output – power supply – FSK                   | 500 V                                  |
| <b>Isolation</b> channel 1 – channel 2        |  |
| Input 1 – input 2                             | 500 V                                  |
| Output 1 – output 2                           | 500 V                                  |
| Max. ambient temperature                      | -20...+60 °C                           |
| Weight  | 140 g                                  |
| <b>Power supply</b>                           |  |
| Rated voltage                                 | 19.2...30 V DC                         |
| Power consumption                             | 3.1 W                                  |
| Power dissipation                             | 2.45 W                                 |
| <b>Performance under reference conditions</b> |  |
| Linearity deviation                           | < 0.1 %                                |
| Error limit                                   | < 0.25 %                               |
| Temperature effect                            | < 0.1 %/10 K                           |
| Impedance effect                              | < 0.05 %                               |
| Response time                                 | < 50 ms                                |
| <b>V17151-74019_0</b>                         |  |
| 1   | blade-contact connector, type F        |
| 2   | blade-contact connector, type D        |
| _ 1   | 24 V power supply                      |
| _ 2   | 230 V power supply (under preparation) |

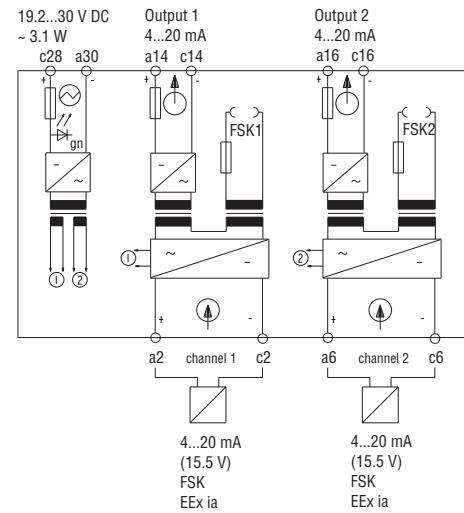


Circuit diagram corresponds to catalog number V17151-74019210.

**Output Isolators, 19"**

|                          |                                 |                |
|--------------------------|---------------------------------|----------------|
| Isolating Driver, 19"    | 1 channel, HART, FSK bus .....  | V17153-42019_0 |
| Isolating Driver, 19"    | 2 channels, HART, FSK bus ..... | V17153-44019_0 |
| Isolating Driver Ex, 19" | 1 channel, HART, FSK bus .....  | V17153-82019_0 |
| Isolating Driver Ex, 19" | 2 channels, HART, FSK bus ..... | V17153-84019_0 |

1 channel, HART, FSK bus

- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal and HART communication

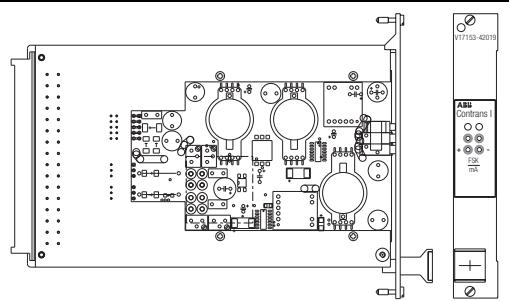


|   |  |  |
|---|--|--|
| <b>Input</b>                                  | ↓                                      |  |
| Input current                                 | 4...20 mA                              |  |
| Voltage drop                                  | < 6.9 V                                |  |
| <b>Communication</b>                          |  |  |
| via FSK bus                                   |  |  |
| via jacks 2 x 2 mm (front)                    |  |  |
| Permeable protocol                            | HART                                   |  |
| Bandwidth                                     | 500 Hz...10 kHz                        |  |
| <b>Output</b>                                 | ↓                                      |  |
| Output current (short-circuit proof)          | 4...20 mA                              |  |
| Transformation ratio                          | 1:1                                    |  |
| Detect. of wire break (input)                 | < 0.1 mA                               |  |
| Detect. of overranging (input, approx.)       | 23...29 mA                             |  |
| Load  | 0...600 Ω                              |  |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |  |
| <b>General data</b>                           |  |  |
| LED indicators, power "On" (green)            |  |  |
| <b>Isolation</b>                              |  |  |
| Output – input/power supply/FSK               | 2.3 kV                                 |  |
| Input – power supply – FSK                    | 500 V                                  |  |
| Max. ambient temperature                      | -20...+60 °C                           |  |
| Weight  | 120 g                                  |  |
| <b>Power supply</b>                           | ⊕                                      |  |
| Rated voltage                                 | 19.2...30 V DC                         |  |
| Power consumption                             | 1.1 W                                  |  |
| Power dissipation                             | 1.1 W                                  |  |
| <b>Performance under reference conditions</b> |  |  |
| Linearity deviation                           | < 0.1 %                                |  |
| Error limit                                   | < 0.25 %                               |  |
| Temperature effect                            | < 0.1 %/10 K                           |  |
| Impedance effect                              | < 0.05 %                               |  |
| Response time                                 | < 50 ms                                |  |
| <b>Ordering information</b>                   |  |  |
| <b>V17153-42019_0</b>                         |  |  |
| 1 __  | blade-contact connector, type F        |  |
| 2 __  | blade-contact connector, type D        |  |
| _ 1 _   | 24 V power supply                      |  |
| _ 2 _   | 230 V power supply (under preparation) |  |


Circuit diagram corresponds to catalog number V17153-42019210.

2 channels, HART, FSK bus

- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication

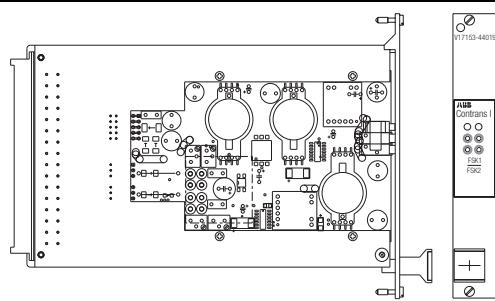


|   |  |
|---|--|
| <b>Input</b> per channel                      | ↓                                      |
| Input current                                 | 4...20 mA                              |
| Voltage drop                                  | < 6.9 V                                |
| <b>Communication</b> per channel              |  |
| via FSK bus                                   |  |
| via jacks 2 x 2 mm (front)                    |  |
| Permeable protocol                            | HART                                   |
| Bandwidth                                     | 500 Hz...10 kHz                        |
| <b>Output</b> per channel                     | ↓                                      |
| Output current (short-circuit proof)          | 4...20 mA                              |
| Transformation ratio                          | 1:1                                    |
| Detect. of wire break (input)                 | < 0.1 mA                               |
| Detect. of short-circuit (input, approx.)     | 23...28 mA                             |
| Load  | 0...600 Ω                              |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |
| OVERRANGING in input                          | 23...28 mA                             |
| <b>General data</b>                           |  |
| LED indicators, power „On“ (green)            |  |
| <b>Isolation</b> per channel                  |  |
| Input – input/power supply/FSK                | 2.3 kV                                 |
| Input – power supply/FSK                      | 500 V                                  |
| <b>Isolation</b> channel 1 – channel 2        |  |
| Input 1 – input 2                             | 500 V                                  |
| Output 1 – output 2                           | 500 V                                  |
| Max. ambient temperature                      | -20...+60 °C                           |
| Weight  | 140 g                                  |
| <b>Power supply</b>                           |  |
| Rated voltage                                 | 19.2...30 V DC                         |
| Power consumption                             | 2.2 W                                  |
| Power dissipation                             | 2.2 W                                  |
| <b>Performance under reference conditions</b> |  |
| Linearity deviation                           | < 0.1 %                                |
| Error limit                                   | < 0.25 %                               |
| Temperature effect                            | < 0.1 %/10 K                           |
| Impedance effect                              | < 0.05 %                               |
| Response time                                 | < 50 ms                                |
| <b>Ordering information</b>                   |  |
| <b>V17153-44019_0</b>                         |  |
| 1   | blade-contact connector, type F        |
| 2   | blade-contact connector, type D        |
| _ 1   | 24 V power supply                      |
| _ 2   | 230 V power supply (under preparation) |

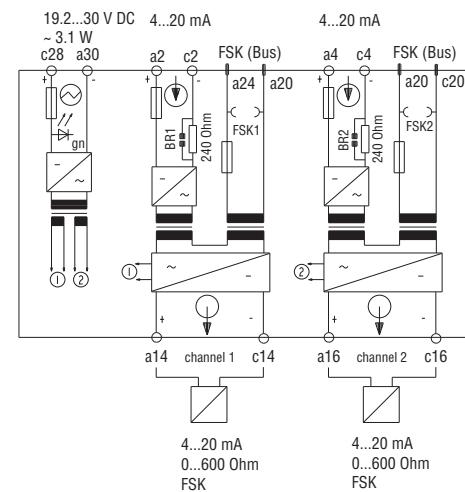


Circuit diagram corresponds to catalog number V17153-44019210.



- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication
- Electrical isolation between input/output/power supply and HART
- Testjacks for mA signal and HART communication

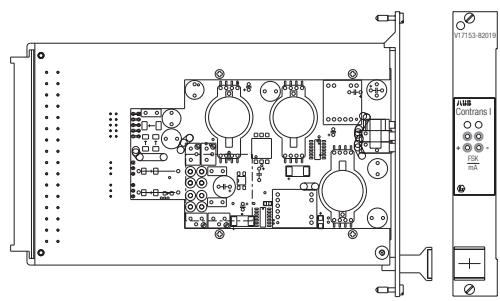


|   |  |
|---|--|
| <b>Input</b>                                  | ↓ (safe area)                          |
| Input current                                 | 4...20 mA                              |
| Voltage drop                                  | < 6.9 V                                |
| <b>Communication</b>                          |  |
| via FSK bus                                   |  |
| via jacks 2 x 2 mm (front)                    |  |
| Permeable protocol                            | HART                                   |
| Bandwidth                                     | 500 Hz...10 kHz                        |
| <b>Output</b>                                 | ↓ (hazardous area)                     |
| Output current (short-circuit proof)          | 4...20 mA                              |
| Transformation ratio                          | 1:1                                    |
| Detect. of wire break (input)                 | < 0.1 mA                               |
| Detect. of overranging (input, approx.)       | 23...29 mA                             |
| Load  | 0...600 Ω                              |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |
| <b>Explosion protection</b>                   | [EEx ia] II C                          |
| Certificate of conformity                     | PTB 98 ATEX 2183 X                     |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA                 |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V                |
| Max. power                                    | P <sub>o</sub> = 610 mW                |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH                |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF                 |
| <b>General data</b>                           |  |
| LED indicators, power "On" (green)            |  |
| <b>Isolation</b>                              |  |
| Input – output/power supply/FSK               | 2.3 kV                                 |
| Output – power supply – FSK                   | 500 V                                  |
| Max. ambient temperature                      | -20...+60 °C                           |
| Weight  | 120 g                                  |
| <b>Power supply</b>                           | ⊕                                      |
| Rated voltage                                 | 19.2...30 V DC                         |
| Power consumption                             | 1.1 W                                  |
| Power dissipation                             | 1.1 W                                  |
| <b>Performance under reference conditions</b> |  |
| Linearity deviation                           | < 0.1 %                                |
| Error limit                                   | < 0.25 %                               |
| Temperature effect                            | < 0.1 %/10 K                           |
| Impedance effect                              | < 0.05 %                               |
| Response time                                 | < 50 ms                                |
| <b>Ordering information</b>                   |  |
| <b>V17153-82019_0</b>                         |  |
| 1 _ _   | blade-contact connector, type F        |
| 2 _ _   | blade-contact connector, type D        |
| _ 1 _   | 24 V power supply                      |
| _ 2 _   | 230 V power supply (under preparation) |

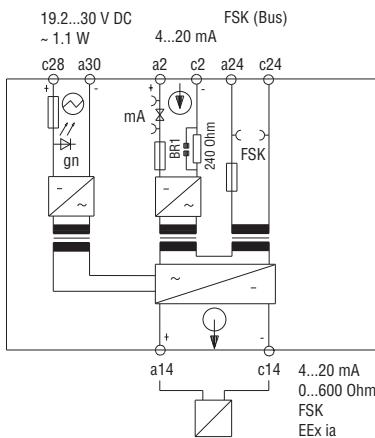


Circuit diagram corresponds to catalog number V17153-82019210.



- Isolating driver for I/P converter, positioner with HART-communication
- FSK bus communication
- Electrical isolation between input/output/power supply and HART
- Jacks for HART communication

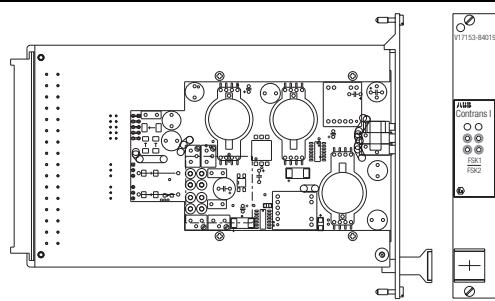

|   |  |
|---|--|
| <b>Input</b> per channel                      | ↙ (safe area)                          |
| Input current                                 | 4...20 mA                              |
| Voltage drop                                  | < 6.9 V                                |
| <b>Communication</b> per channel              |  |
| via FSK bus                                   |  |
| via jacks 2 x 2 mm (front)                    |  |
| Permeable protocols                           | HART                                   |
| Bandwidth                                     | 500 Hz...10 kHz                        |
| <b>Output</b> per channel                     | ↓ (hazardous area)                     |
| Output current (short-circuit proof)          | 4...20 mA                              |
| Transformation ratio                          | 1:1                                    |
| Detect. of wire break (input)                 | < 0.1 mA                               |
| Detect. of short-circuit (input, approx.)     | 23...28 mA                             |
| Load  | 0...600 Ω                              |
| Residual ripple (peak-to-peak)                | < 0.25 %                               |
| OVERRANGING in input                          | 23...28 mA                             |
| <b>Explosion protection</b>                   | [EEx ia] IIC                           |
| Certificate of conformity                     | PTB 98 ATEX 2183 X                     |
| Max. short-circuit current                    | I <sub>o</sub> = 93 mA                 |
| Max. voltage                                  | U <sub>o</sub> = 26.3 V                |
| Max. power                                    | P <sub>o</sub> = 610 mW                |
| Permitted external inductance                 | L <sub>a</sub> = 4.1 mH                |
| Permitted external capacitance                | C <sub>a</sub> = 97 nF                 |
| <b>General data</b>                           |  |
| LED indicators, power "On" (green)            |  |
| <b>Isolation</b> per channel                  |  |
| Input – output/power supply/FSK               | 2.3 kV                                 |
| Output – power supply/FSK                     | 500 V                                  |
| <b>Isolation</b> channel 1 – channel 2        |  |
| Input 1 – input 2                             | 500 V                                  |
| Output 1 – output 2                           | 500 V                                  |
| Max. ambient temperature                      | -20...+60 °C                           |
| Weight  | 140 g                                  |
| <b>Power supply</b>                           | ⊕                                      |
| Rated voltage                                 | 19.2...30 V DC                         |
| Power consumption                             | 2.2 W                                  |
| Power dissipation                             | 2.2 W                                  |
| <b>Performance under reference conditions</b> |  |
| Linearity deviation                           | < 0.1 %                                |
| Error limit                                   | < 0.25 %                               |
| Temperature effect                            | < 0.1 %/10 K                           |
| Impedance effect                              | < 0.05 %                               |
| Response time                                 | < 50 ms                                |
| <b>Ordering information</b>                   |  |
| <b>V17153-84019_0</b>                         |  |
| 1 __  | blade-contact connector, type F        |
| 2 __  | blade-contact connector, type D        |
| _ 1 __  | 24 V power supply                      |
| _ 2 __  | 230 V power supply (under preparation) |

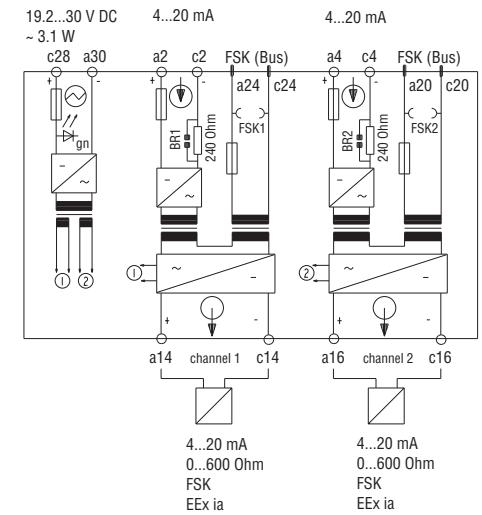

Circuit diagram corresponds to catalog number V17153-84019210.

## **Mounting and Installation Instructions**

---

### **Mounting and Installation Instructions**

|                           |     |
|---------------------------|-----|
| Safety Instructions ..... | 140 |
| Encoding .....            | 141 |

## Mounting and Installation Instructions

---

### Safety Instructions

Correct and safe operation of Contrans I calls for appropriate transportation and storage, expert installation and commissioning as well as correct operation and meticulous maintenance.

Only those persons conversant with the installation, commissioning, operation and maintenance of similar apparatuses and who possess the necessary qualifications are allowed to work on Contrans I.

Contrans I has been designed and tested in conform with EN 61010-1 or DIN VDE 0411, Part 1 "Safety requirements for electrical process control units, instrumentation and laboratory devices", overvoltage category II, pollution class 2 and has been supplied in a safe condition.

In order to retain this condition and to ensure safe operation, the following safety instructions must be observed. Otherwise, persons can be endangered and the Contrans I components themselves as well as other equipment and facilities can be damaged.

- Before plugging the module into the socket, care must be taken to ensure that the socket circuitry agrees with that of the connecting diagram. For voltages > 50 V AC or 120 V DC the terminals must be marked with the rated voltage or the socket must be coded. The coding or marking must correspond to the "Mounting and Installation Instructions".

- For voltages higher than 50 V AC/120 V DC, the insulation lengths of terminal wires must be between 5...6 mm. If more flexible lines are used, the end ferrules used should have these lengths.

- Before switching on devices of the protection class III, it must be ascertained that the power source has a functional extra-low voltage with an electrical isolation corresponding to the existing provisions.

- When opening covers or removing parts, except when this is manually possible, live parts may be exposed.

- The apparatus shall be disconnected from all voltage sources before it is opened for any operations. Operations on the opened apparatus under voltage must only be performed by an expert, who is aware of the hazard involved.

- Whenever it is likely that the protection has been impaired, the apparatus shall be made inoperative and be secured against any unintended operation.

Apart from the technical documentation in this catalog, the following must also be observed:

- The safety regulations pertaining to the installation and operation of electrical systems,
- the directives and guidelines on explosion protection.

If the information supplied in this catalog should prove to be insufficient, the ABB service department will be pleased to provide you with more information.

# Mounting and Installation Instructions


## Encoding

| Unintentional assignment of wrong functions can be prevented with coded modules |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
|---|------------|------------|------------|------------|------------|--------------------|-------------------|------|------|------|------|------|------|----|
| Encoding pin  |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
|   | 1          | 2          | 3          | 4          | 5          | 6                  | 7                 | 8    | 9    | 10   | 11   | 12   | 13   | 14 |
| Type group  | Type group | Type group | Type group | Type group | Type group | > 50 V AC/120 V DC | Contrans L_remote | Type | Type | Type | Type | Type | Type | Ex |
| Binary modules: Switch amplifier  |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17131-130  | ●          |            |            |            |            |                    |                   |      |      | ●    |      |      |      |    |
| V17131-160  | ●          |            |            |            |            |                    |                   | ●    |      |      |      |      |      |    |
| V17131-510  | ●          |            |            |            |            | ○                  |                   |      |      |      | ●    | ●    |      |    |
| V17131-520  | ●          |            |            |            |            | ○                  |                   |      |      |      | ●    | ●    |      |    |
| V17131-530  | ●          |            |            |            |            | ○                  |                   |      |      | ●    |      |      |      |    |
| V17131-540  | ●          |            |            |            |            |                    |                   |      | ●    |      |      |      |      |    |
| V17131-550  | ●          |            |            |            |            |                    |                   | ●    |      |      |      |      |      |    |
| V17131-560  | ●          |            |            |            |            |                    | ●                 |      |      |      |      |      |      |    |
| Binary modules: Solenoid drivers  |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17132-510  |            | ●          |            |            |            |                    |                   |      |      |      | ●    | ●    |      |    |
| V17132-520  |            | ●          |            |            |            |                    |                   |      |      |      | ●    | ●    |      |    |
| V17132-530  |            | ●          |            |            |            |                    |                   |      |      | ●    |      | ●    |      |    |
| V17132-540  |            | ●          |            |            |            |                    |                   |      | ●    |      |      | ●    |      |    |
| V17132-550  |            | ●          |            |            |            |                    |                   | ●    |      |      |      | ●    |      |    |
| V17132-560  |            | ●          |            |            |            |                    |                   | ●    |      |      |      | ●    |      |    |
| V17132-570  |            | ●          |            |            |            |                    |                   | ●    | ●    |      |      |      |      |    |
| Binary modules: Coupling modules  |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17133-110  |            |            | ●          |            |            |                    |                   |      |      |      | ●    |      |      |    |
| V17133-210  |            |            | ●          |            |            | ○                  |                   | ●    |      |      |      |      |      |    |
| V17133-510  |            |            | ●          |            |            |                    |                   | ●    |      |      |      | ●    |      |    |
| Analog modules: Input isolators   |            |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17151-110  |            |            |            |            | ●          |                    |                   |      |      |      | ●    |      |      |    |
| V17151-130  |            |            |            |            | ●          |                    |                   |      |      |      | ●    |      |      |    |
| V17151-140  |            |            |            |            | ●          |                    |                   |      | ●    | ●    | ●    |      |      |    |
| V17151-210  |            |            |            |            | ●          |                    |                   |      |      | ●    |      |      |      |    |
| V17151-211  |            |            |            |            | ●          |                    |                   |      |      | ●    |      | ●    |      |    |
| V17151-212  |            |            |            |            | ●          |                    |                   |      |      | ●    | ●    | ●    |      |    |
| V17151-213  |            |            |            |            | ●          |                    |                   |      | ●    | ●    |      |      |      |    |
| V17151-220  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-221  |            |            |            |            | ●          |                    |                   |      | ●    |      |      | ●    |      |    |
| V17151-222  |            |            |            |            | ●          |                    |                   |      | ●    |      |      | ●    |      |    |
| V17151-320  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-325  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-340  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-350  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-413  |            |            |            |            | ●          |                    |                   |      |      |      | ●    |      |      |    |
| V17151-420  |            |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      |    |
| V17151-430  |            |            |            |            | ●          | ○                  |                   | ●    |      |      |      |      |      |    |
| V17151-432  |            |            |            |            | ●          | ○                  |                   | ●    |      |      |      |      |      |    |
| V17151-433  |            |            |            |            | ●          | ○                  |                   | ●    |      |      |      |      |      |    |
| V17151-434  |            |            |            |            | ●          | ○                  |                   | ●    |      |      | ●    |      |      |    |
| V17151-440  |            |            |            |            | ●          |                    |                   | ●    | ●    | ●    |      |      |      |    |
| V17151-480  |            |            |            |            | ●          | ○                  |                   | ●    |      | ●    |      |      |      |    |
| V17151-510  |            |            |            |            | ●          |                    |                   |      |      |      | ●    | ●    |      |    |
| V17151-520  |            |            |            |            | ●          |                    |                   |      |      |      | ●    | ●    |      |    |
| V17151-610  |            |            |            |            | ●          |                    |                   |      | ●    |      |      | ●    |      |    |
| V17151-611  |            |            |            |            | ●          |                    |                   |      | ●    |      |      | ●    |      |    |
| V17151-612  |            |            |            |            | ●          |                    |                   |      | ●    | ●    | ●    | ●    |      |    |
| V17151-613  |            |            |            |            | ●          |                    |                   |      | ●    | ●    |      |      |      |    |

○ = only when voltages > 50 V AC or 120 V DC are connected


### Functional diagram for coding (suggestion)

Partial view of socket

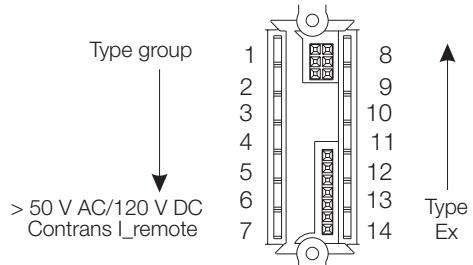

### Example of coding (type V17131-1x)

Encoding star with 4 encoding pins  
(part of supply for socket/backplane)

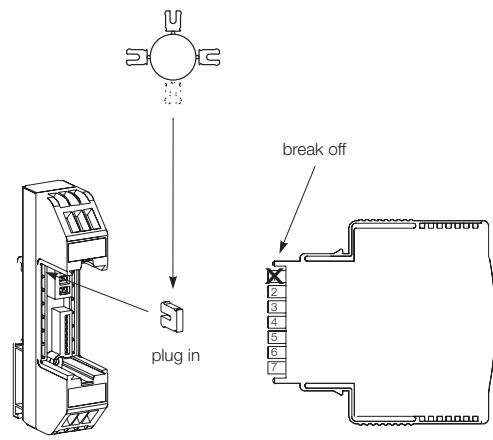


# Mounting and Installation Instructions


## Encoding

| Unintentional assignment of wrong functions can be prevented with coded modules |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
|---|--------------|------------|------------|------------|------------|--------------------|-------------------|------|------|------|------|------|------|----|
|   | Encoding pin |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
|   | 1            | 2          | 3          | 4          | 5          | 6                  | 7                 | 8    | 9    | 10   | 11   | 12   | 13   | 14 |
|   | Type group   | Type group | Type group | Type group | Type group | > 50 V AC/120 V DC | Contrans L_remote | Type | Type | Type | Type | Type | Type | Ex |
| Analogue modules: Input isolators   |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17151-620  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-621  |              |            |            |            | ●          |                    |                   |      | ●    |      |      | ●    | ●    |    |
| V17151-725  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-740  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-745  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-750  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-755  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-820  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-825  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-840  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| V17151-845  |              |            |            |            | ●          |                    |                   |      | ●    |      |      |      |      | ●  |
| Analogue modules: Transmitters  |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17152-310  |              |            |            |            | ●          | ○                  |                   |      |      |      |      |      |      | ●  |
| V17152-312  |              |            |            |            | ●          | ○                  |                   |      |      |      |      |      |      |    |
| V17152-313  |              |            |            |            | ●          | ○                  |                   |      |      |      |      |      |      |    |
| V17152-314  |              |            |            |            | ●          | ○                  |                   | ●    |      |      |      |      |      |    |
| V17152-611  |              |            |            |            | ●          |                    |                   |      |      |      |      |      |      |    |
| V17152-612  |              |            |            |            | ●          |                    |                   |      |      |      |      |      |      |    |
| V17152-613  |              |            |            |            | ●          |                    |                   |      |      |      |      |      |      |    |
| V17152-614  |              |            |            |            | ●          |                    |                   |      |      |      |      |      |      |    |
| V17152-619  |              |            |            |            | ●          |                    |                   |      |      |      |      |      |      |    |
| V17152-620  |              |            |            |            | ●          | ○                  |                   |      |      |      |      |      |      |    |
| V17152-622  |              |            |            |            | ●          | ○                  |                   |      | ●    |      |      |      |      | ●  |
| V17152-623  |              |            |            |            | ●          | ○                  |                   |      | ●    |      |      |      |      | ●  |
| V17152-624  |              |            |            |            | ●          | ○                  |                   | ●    |      |      |      |      |      | ●  |
| Analog modules: Output isolators  |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-110  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      | ●  |
| V17153-115  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-130  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-210  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-220  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-420  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-440  | ●            | ●          |            |            |            |                    | ●                 |      |      |      |      |      |      |    |
| V17153-510  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-515  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-520  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-610  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-620  | ●            | ●          |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17153-820  | ●            | ●          |            |            |            |                    |                   | ●    |      |      |      |      |      |    |
| V17153-825  | ●            | ●          |            |            |            |                    |                   | ●    |      |      |      |      |      |    |
| V17153-840  | ●            | ●          |            |            |            |                    |                   | ●    |      |      |      |      |      |    |
| V17153-845  | ●            | ●          |            |            |            |                    |                   | ●    |      |      |      |      |      | ●  |
| Signalling and monitoring modules: Trip amplifier                               |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17171-110  | ●            |            | ●          |            |            |                    |                   |      |      |      |      |      |      | ●  |
| Accessories   |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |
| V17191-110  | ●            |            |            | ●          |            |                    |                   |      |      |      |      |      |      |    |
| V17191-120  | ●            |            |            | ●          |            |                    |                   |      |      |      | ●    |      |      |    |
| O = only when voltages > 50 V AC or 120 V DC are connected                      |              |            |            |            |            |                    |                   |      |      |      |      |      |      |    |

**Functional diagram for coding** (suggestion)  
Partial view of socket

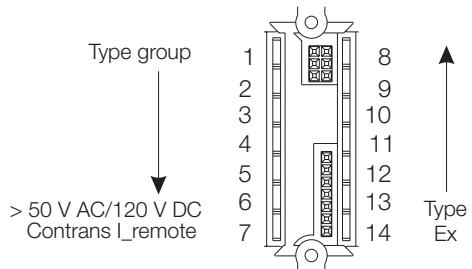

**Example of coding** (type V17131-1x)  
Encoding star with 4 encoding pins  
(part of supply for socket/backplane)

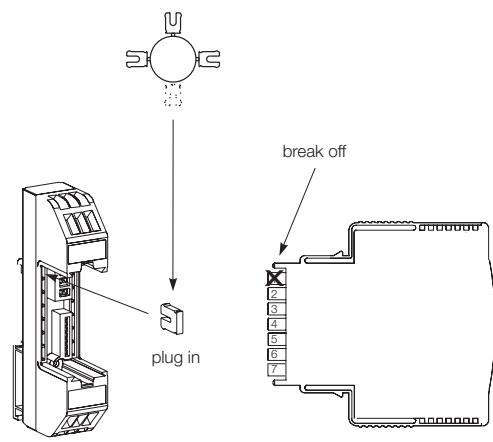

---

The Industrial<sup>T</sup> wordmark and all mentioned product names in the form XXXXXX<sup>T</sup> are registered or pending trademarks of ABB.

ABB has Sales & Customer Support expertise in over 100 countries worldwide.

[www.abb.com](http://www.abb.com)

The Company's policy is one of continuous product improvement and the right is reserved to modify the information contained herein without notice.

Printed in the Fed. Rep. of Germany (11.02)

© ABB 2002



**ABB Automation Products GmbH**

Borsigstr. 2  
63755 Alzenau  
Germany  
Tel: +49 6023 92-0  
Fax: +49 6023 92-3430